


500V N-CHANNEL ENHANCEMENT MODE MOSFET

MAIN CHARACTERISTICS

I_D	25A
V_{DSS}	500V
$R_{DS(on)-typ}(@V_{GS}=10V)$	<0.26Ω (Type:0.21 Ω)

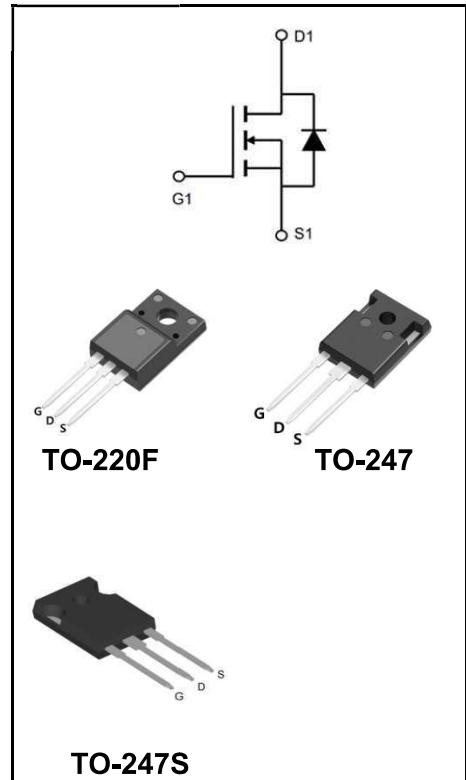

Features

- ◆Fast Switching
- ◆Low ON Resistance
- ◆Low Gate Charge
- ◆100% Single Pulse avalanche energy Test
- ◆LeadfreeincomplywithEUroHS2011/65/EUdirectives

Mechanical Data

- ◆Case: Molded plastic
- ◆Mounting Position: Any
- ◆Molded Plastic: UL Flammability Classification Rating 94V-0
- ◆Solder bath temperature275℃maximum,10s per JESD22-106

Product Specification Classification

Part Number	Package	Marking	Pack
YFW25N50AF	TO-220F	YFW 25N50AF XXXXX	50PCS/Tube
YFW25N50AP	TO-247	YFW 25N50AP XXXXX	30PCS/Tube
YFW25N50APS	TO-247S	YFW 25N50APS XXXXX	30PCS/Tube

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value		Units
		220F	247/247S	
Drain-Source Voltage	V_{DS}	500		V
Gate-Source Voltage	V_{GS}	±30		V
Continue Drain Current	I_D	25		A
-Continuous (TC = 100°C)		20		
Pulsed Drain Current (Note1)	I_{DM}	100		A
Power Dissipation	P_D	75	230	W
-Derate above 25°C		0.4	1.84	W/°C
Single Pulse Avalanche Energy (Note2)	E_{AS}	1500		mJ
Avalanche Current (Note 1)	I_{AR}	25		A
Repetitive Avalanche Energy (Note 1)	E_{AS}	30		mJ
Operating Temperature Range	T_J	150		°C
Storage Temperature Range	T_{STG}	-55 to +150		°C
Thermal Resistance, Junction to Case	R_{θJC}	1.69	0.42	°C/W
Thermal Resistance, Junction to Ambient	R_{θJA}	62.5	40	°C/W

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _D = 250 μA	BV_{DSS}	500	-	-	V
Drain-Source Leakage Current	V _{DS} = 500 V, V _{GS} = 0 V	I_{DSS}	-	-	1	uA
	V _{DS} = 400 V, T _c = 125°C		-	-	10	
Gate Leakage Current	V _{GS} = ± 30 V, V _{DS} = 0 V	I_{GSS}	-	-	±100	nA
Gate-Source Threshold Voltage	V _{DS} = V _{GS} , I _D = 250 μA	V_{GS(th)}	2	-	4	V
Drain-Source On-State Resistance	V _{GS} = 10 V, I _D = 12.5A	R_{DS(on)}	-	0.21	0.26	Ω
Forward Transconductance	V _{DS} = 15 V, I _D = 12.5 A	g_{fs}	-	18	-	S
Input Capacitance	V _{GS} = 0 V, V _{DS} = 25 V, f = 1MHz	C_{iss}	-	3039	-	pF
Output Capacitance		C_{oss}	-	214	-	
Reverse Transfer Capacitance		C_{rss}	-	10	-	
Turn-on Delay Time	I _D = 25, V _{DD} = 250V, R _G = 10Ω (Note3,4)	td(ON)	-	37.2	-	nS
Rise Time		tr	-	64.4	-	
Turn-Off Delay Time		td(OFF)	-	86.8	-	
Fall Time		tf	-	46	-	
Total Gate Charge	I _D = 25 A, V _{DD} = 400 V, V _{GS} = 10 V (Note3,4)	Q_G	-	80	-	nC
Gate to Source Charge		Q_{GS}	-	17	-	
Gate to Drain Charge		Q_{GD}	-	23	-	





Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Maximun Body-Diode Continuous Current		I_S	-	-	25	A
Maximun Body-Diode Pulsed Current(Note2)		I_{SM}	-	-	100	A
Drain-Source Diode Forward Voltage	$I_{SD} = 25A$	V_{SD}	-	-	1.5	V
Reverse Recovery Time	$I_{SD} = 25A, V_{GS} = 0V, di_F / dt = 100 A/\mu s$	trr	-	490	-	nS
Reverse Recovery Charge		Qrr	-	6.2	-	μC





Note:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. $I_{AS} = 25A, V_{DD} = 50V, L = 5mH, R_G = 25\Omega$, starting $T_J = 25^\circ C$.
3. ulse test: Pulse Width $\leq 300 \mu s$, Duty Cycle $\leq 2\%$.
4. Essentially Independent of Operating Temperature.

Ratings and Characteristic Curves

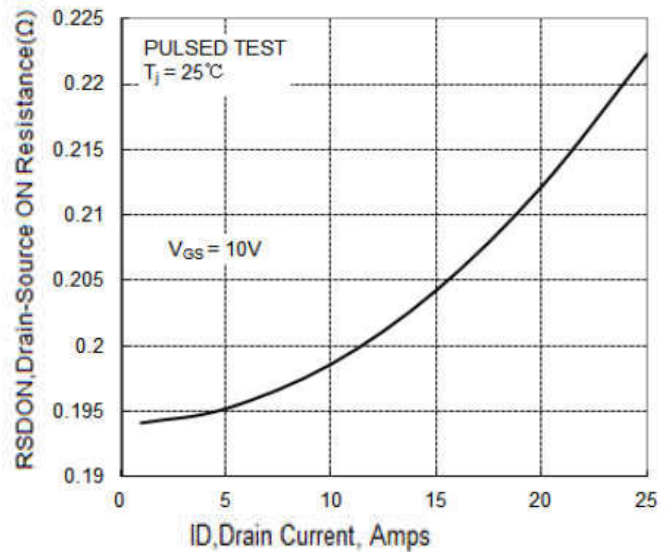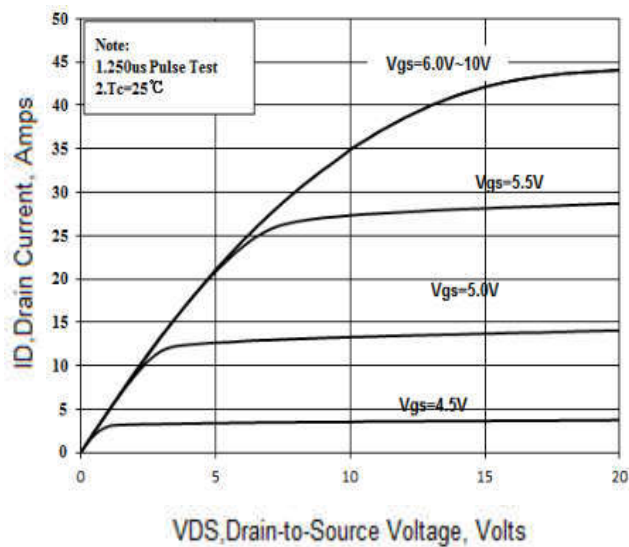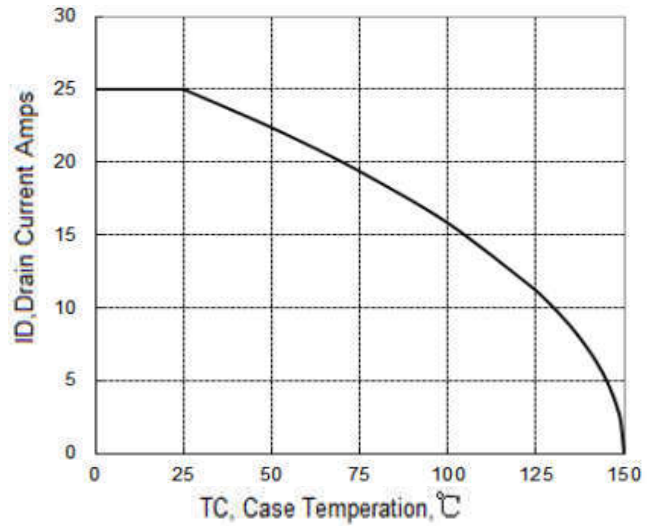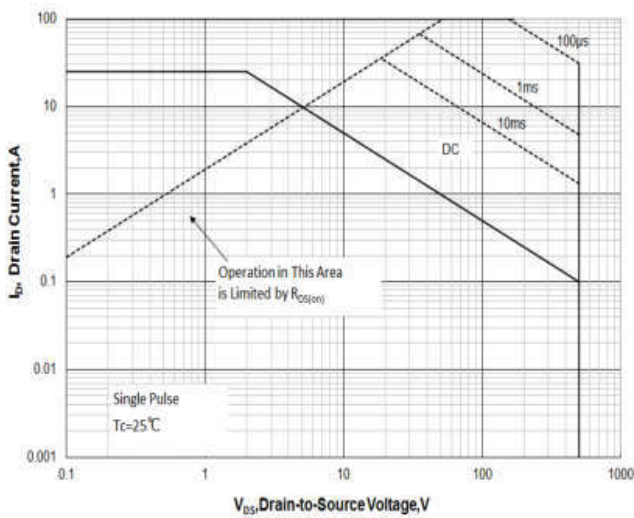

Ratings and Characteristic Curves

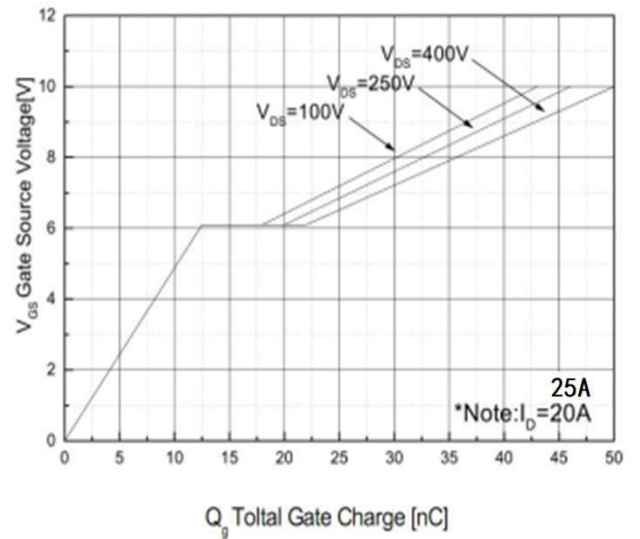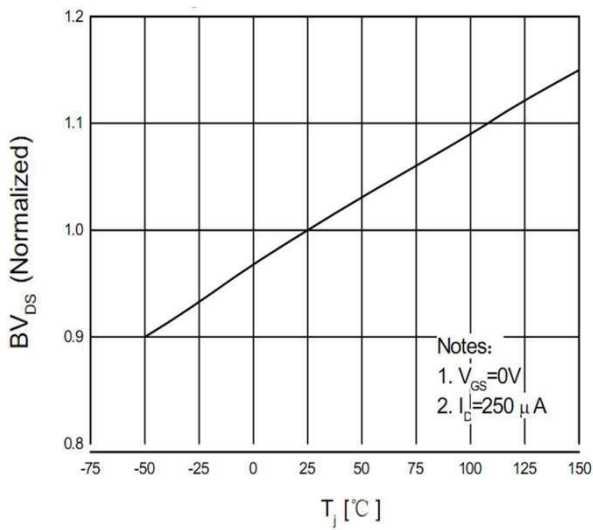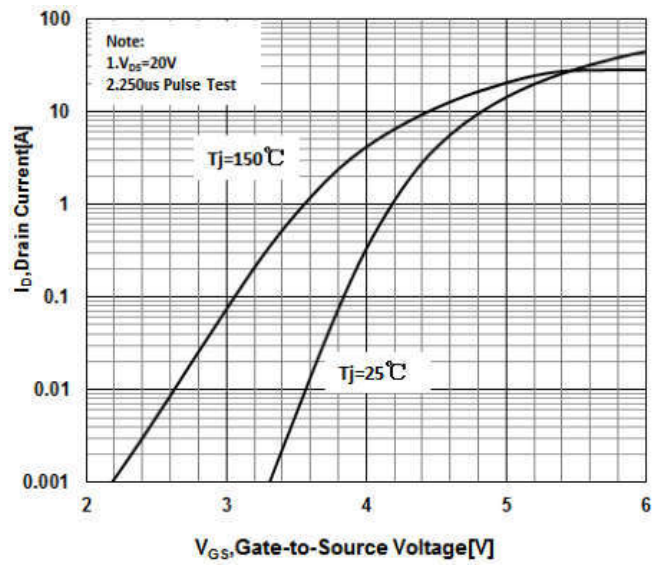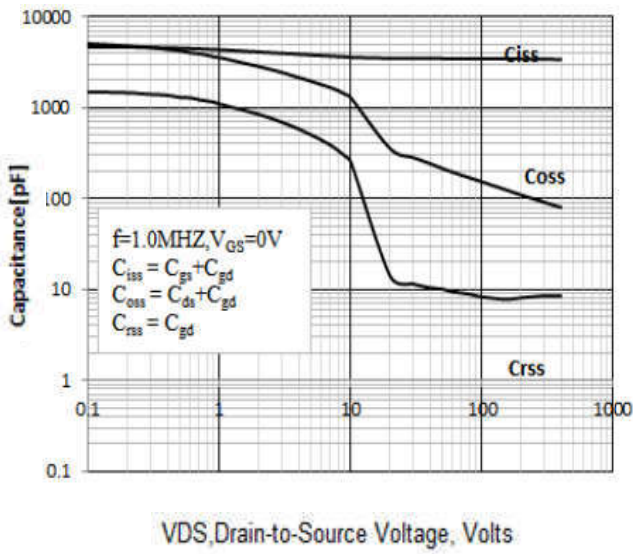

Package Outline Dimensions Millimeters

TO-220F

	Dim.	Min.	Max.
	A	9.95	10.25
	B	2.95	3.25
	C	1.25	1.45
	D	12.95	13.25
	E	0.50	0.65
	F	3.1	3.3
	G	1.30	1.45
	H	Typ 2.54	
	I	Typ 5.08	
	J	4.60	4.75
	K	2.50	2.65
	L	6.35	6.55
	M	15.4	16.0
	N	2.75	3.05
O	0.48	0.52	
P	0.76	0.84	
All Dimensions in millimeter			

TO-247

	Dim.	Min.	Max.
	A	15	16
	B	20	21
	C	41	42
	D	5	6
	E	4	5
	F	2.5	3.5
	G	1.75	2.5
	H	3	3.5
	I	8	10
	J	4.9	5.1
	K	1.9	2.1
	L	3.5	4
	M	4.75	5.25
	N	2	3
O	0.55	0.75	
P	Typ 5.08		
Q	1.2	1.3	
All Dimensions in millimeter			

Package Outline Dimensions millimeters

TO-247S

	Dim.	Min.	Max.
	A	15	16
	B	19.5	20.5
	C	33.5	35.5
	D	5	6
	E	3.5	4.5
	F	2.5	3.5
	G	1.75	2.5
	H	3	4
	I	9	11
	J	4.9	5.1
	K	1	1.3
	L	3.75	4.25
	M	4.75	5.25
N	1.8	2.2	
O	0.45	0.6	
P	Typ 5.08		
Q	1.2	1.3	
All Dimensions in millimeter			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)