


650V N-channel Super Junction MOSFET

MAIN CHARACTERISTICS

I_D	11A
V_{DSS}	650V
R_{DS(on)-typ(@V_{GS}=10V)}	<380mΩ (Type:340mΩ)

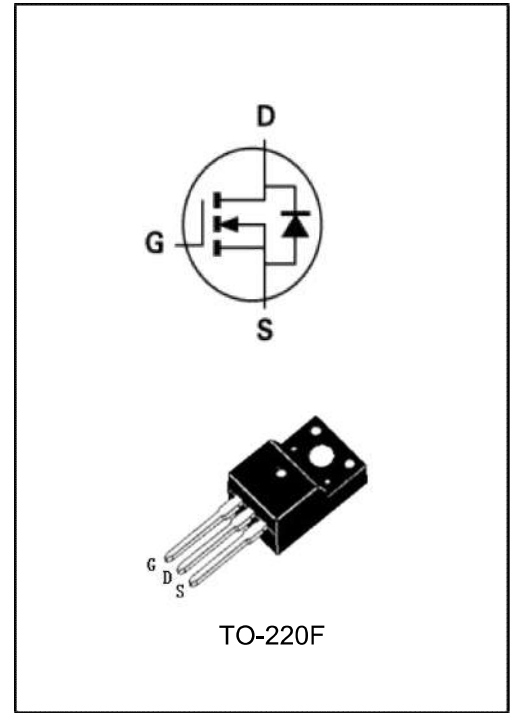

APPLICATIONS

- † Solar inverters
- † LCD/LED/PDP TV
- † Telecom/Server Power supplies
- † AC-DC Power Supply

Mechanical Data

- † Case: Molded plastic
- † Mounting Position: Any
- † Molded Plastic: UL Flammability Classification Rating 94V-0
- † Lead free in compliance with EU RoHS 2011/65/EU directive
- † Solder bath temperature 275°C maximum, 10s per JESD 22-B106

Product Specification Classification

Part Number	Package	Marking	Pack
YFW65R380AF	TO-220F	YFW 65R380AF XXXXX	1000pcs/Tube

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 30	V
Continue Drain Current	I_D	11	A
Pulsed Drain Current (Note1)	I_{DM}	31.8	A
Power Dissipation	P_D	84.5	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	220	mJ
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.48	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62	°C/W







 Note1:Pulse test: 300 μ s pulse width, 2 % duty cycle

Maximum Ratings at Tc=25°C unless otherwise specified







Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250 \mu A$	BV_{DSS}	650	-	-	V
Drain-Source Leakage Current	$V_{DS} = 650 V, V_{GS} = 0 V$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 30 V, V_{DS} = 0 V$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10 V, I_D = 1 A$	$R_{DS(on)}$	-	340	380	m Ω
Input Capacitance	$V_{GS} = 0 V, V_{DS} = 50 V, f = 400 KHz$	C_{iss}	-	747	-	pF
Output Capacitance		C_{oss}	-	55	-	
Reverse Transfer Capacitance		C_{rss}	-	3.3	-	
Turn-on Delay Time	$I_D = 10.6 A, V_{DD} = 325 V, V_{GS} = 10 V, R_G = 25 \Omega$	$t_{d(ON)}$	-	18	-	nS
Rise Time		t_r	-	31	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	65	-	
Fall Time		t_f	-	28	-	
Total Gate Charge	$I_D = 10.6 A, V_{DS} = 520 V, V_{GS} = 10 V$	Q_G	-	20	-	nC
Gate to Source Charge		Q_{GS}	-	3.7	-	
Gate to Drain Charge		Q_{GD}	-	9	-	
Reverse recovery time	$I_{SD} = 10.6 A, V_{DD} = 100 V, di/dt = 100 A/\mu s$	t_{rr}	-	323	-	ns
Reverse recovery current		I_{rr}	-	17.5	-	A
Reverse recovery charge		Q_{rr}	-	2.8	-	μC
Drain-Source Diode Forward Voltage	$V_{GS} = 0 V, I_S = 10.6 A, T_J = 25^\circ C$	V_{SD}	-	1.4	-	v

 Note2:Pulse test: 300 μ s pulse width, 2 % duty cycle

Ratings and Characteristic Curves

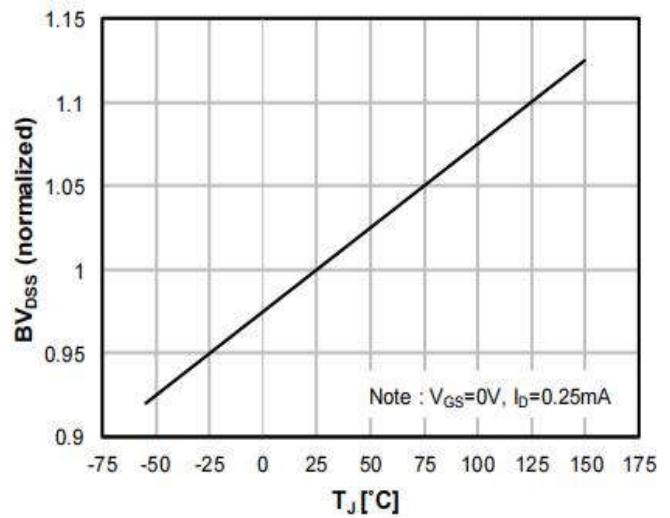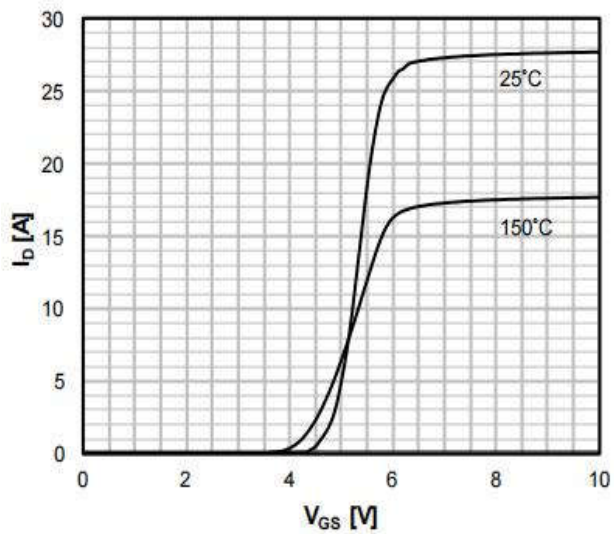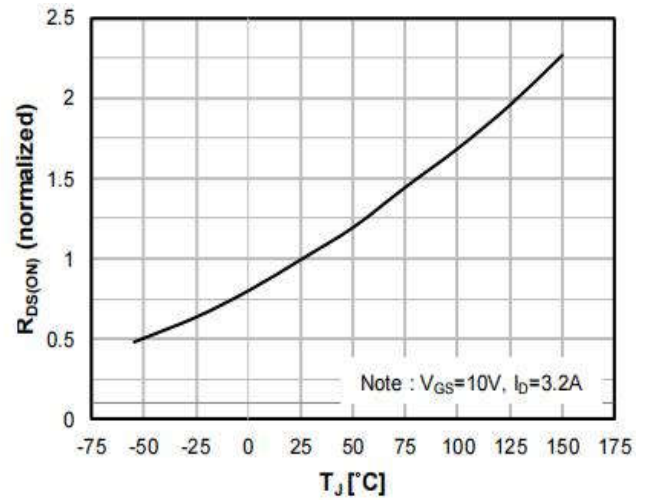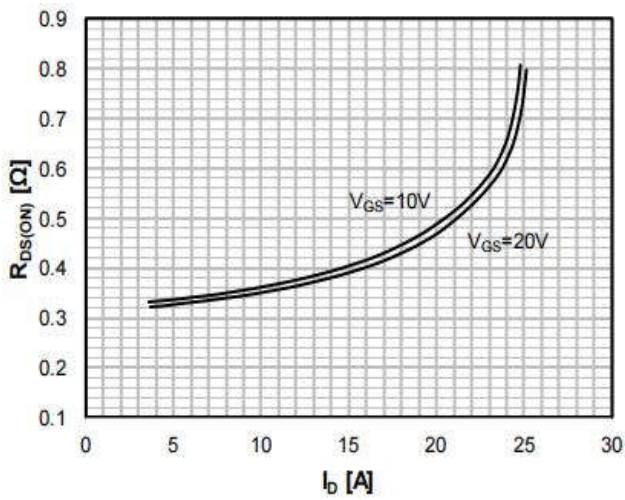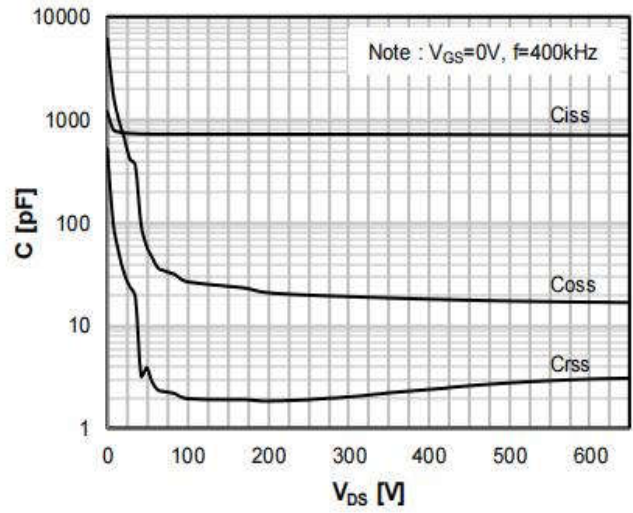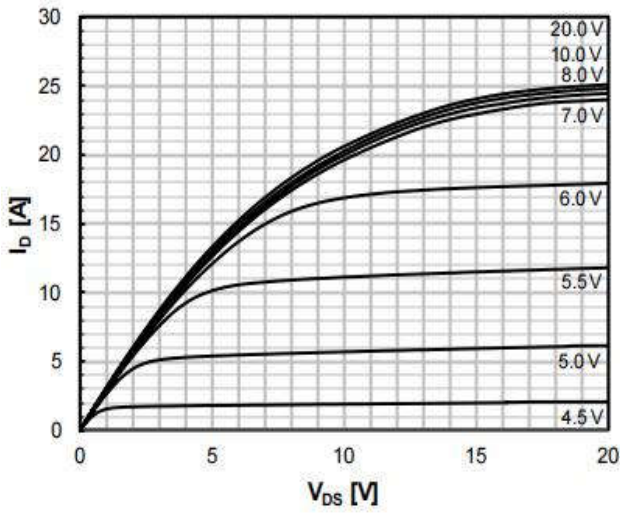

Ratings and Characteristic Curves

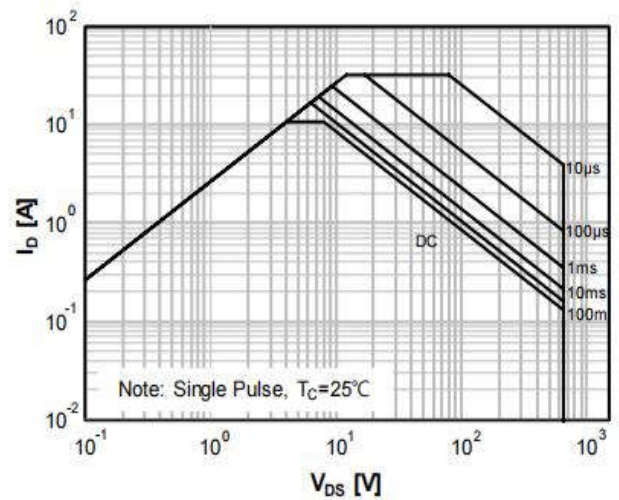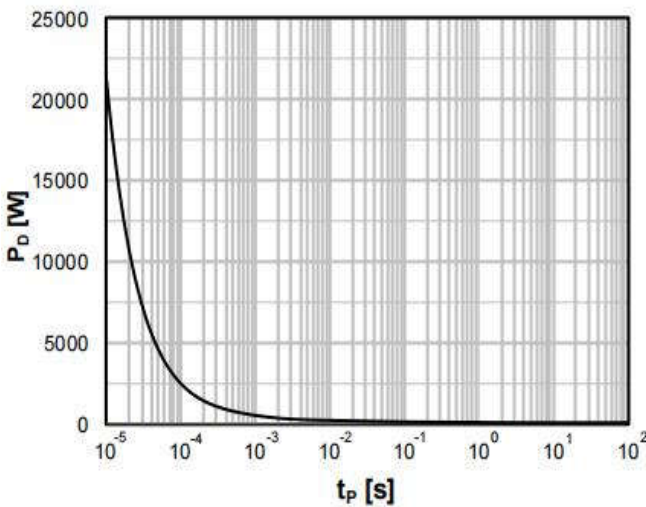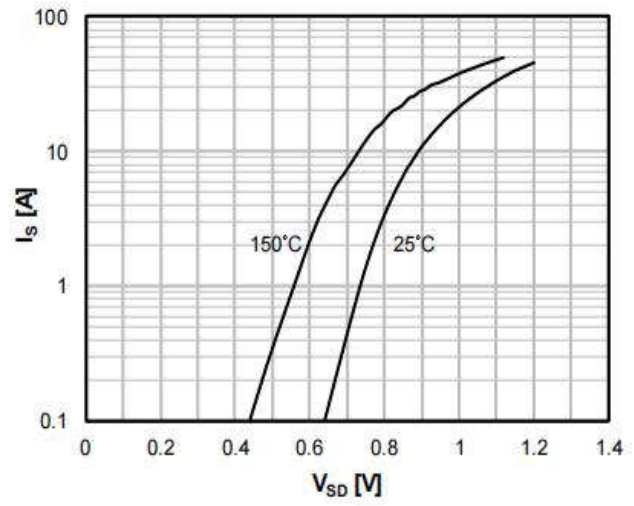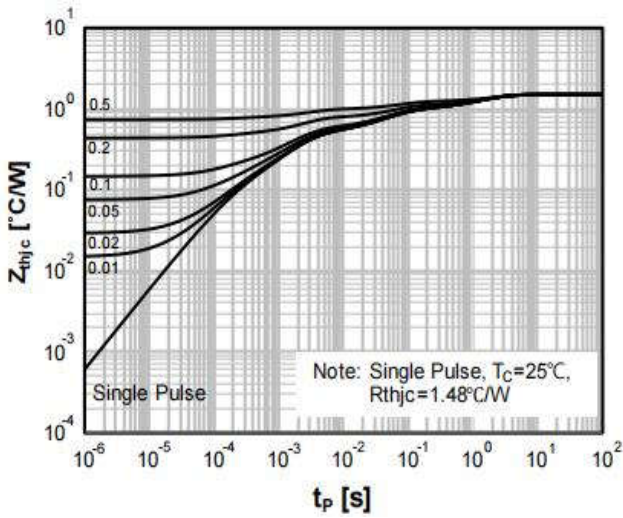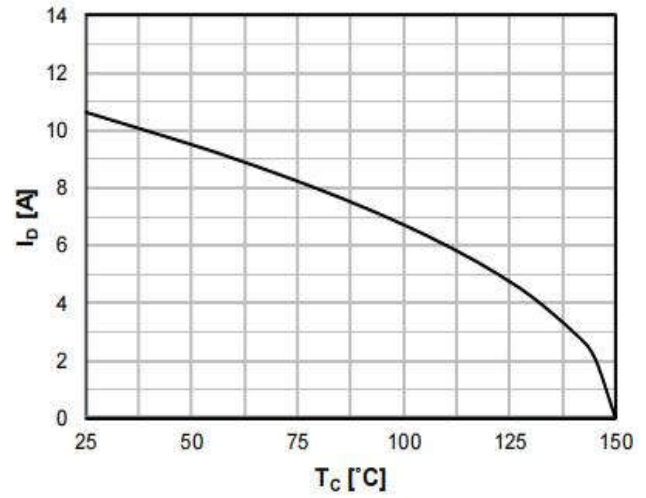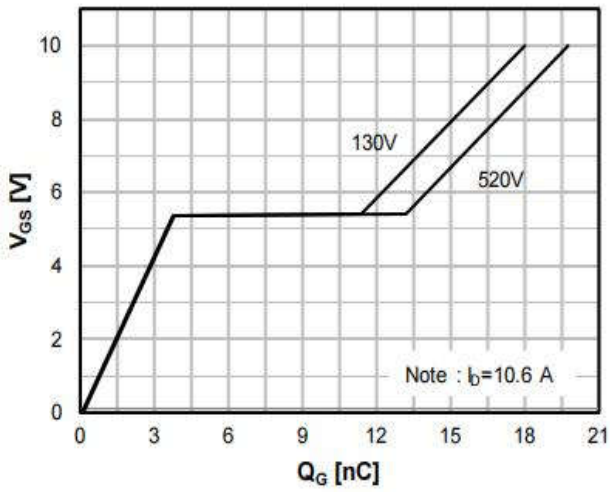

Package Outline Dimensions Millimeters

TO-220F

	Dim.	Min.	Max.
	A	9.95	10.25
	B	2.95	3.25
	C	1.25	1.45
	D	12.95	13.25
	E	0.50	0.65
	F	3.1	3.3
	G	1.30	1.45
	H	Typ 2.54	
	I	Typ 5.08	
	J	4.60	4.75
	K	2.50	2.65
	L	6.35	6.55
	M	15.4	16.0
	N	2.75	3.05
	O	0.48	0.52
P	0.76	0.84	
All Dimensions in millimeter			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)