

60V N-Channel Enhancement Mode MOSFET

MAIN CHARACTERISTICS

I_D	160A
V_{DSS}	60V
R_{DS(on)-typ(@V_{GS}=10V)}	<3mΩ (Type:2.8mΩ)

Features


Adopt advanced trench technology to provide excellent Battery protection or in other Switching application.

Applications

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply
- ◆ **YFW-SGT technology**

Mechanical Data

- ◆ Case: Molded plastic
- ◆ Mounting Position: Any
- ◆ Molded Plastic: UL Flammability Classification Rating 94V-0
- ◆ Lead free in compliance with EU RoHS 2011/65/EU directive
- ◆ Solder bath temperature 275°C maximum, 10s per JESD 22-B106

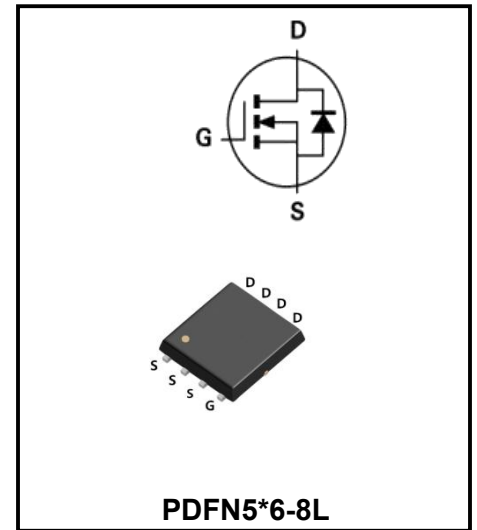

Product Specification Classification

Part Number	Package	Marking	Pack
YFWG160N06NF	PDFN5*6-8L	YFW G160N06NF XXXXX	5000PCS/Tape

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	±20	V
Continue Drain Current	I_D	160	A
Pulsed Drain Current (Note1)	I_{DM}	240	A
Power Dissipation	P_D	210	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	650	mJ
Operating Temperature Range	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.59	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	50	°C/W

Note1:Pulse test: 300 μs pulse width, 2 % duty cycle

Electrical Characteristics at Tc=25°C unless otherwise specified







Characteristics	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250 \mu A$	BV_{DSS}	60	-	-	V
Drain-Source Leakage Current	$V_{DS} = 60 V, V_{GS} = 0 V$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 20 V, V_{DS} = 0 V$	I_{GSS}	-	-	±100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10 V, I_D = 20A$	$R_{DS(on)}$	-	2.8	3	mΩ
Transconductance	$V_{DS}=5V, I_D=20A$	gfs	-	130	-	S
Input Capacitance	$V_{DS}=25V, V_{GS}=0V, f=1MHz$	C_{iss}	-	4200	-	pF
Output Capacitance		C_{oss}	-	1080	-	pF
Reverse Transfer Capacitance		C_{rss}	-	41	-	pF
Turn-on Delay Time(Note2)	$V_{DD}=30V, V_{GS}=10V, RG=3\Omega, I_D=100 A$	$t_{d(ON)}$	-	13.5	-	ns
Rise Time(Note2)		t_r	-	95.5	-	ns
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	40	-	ns
Fall Time(Note2)		t_f	-	110	-	ns
Total Gate Charge(Note2)	$V_{DS}=30V, V_{GS}=10V, I_D=20A$	Q_G	-	42	-	nC
Gate to Source Charge(Note2)		Q_{GS}	-	10	-	nC
Gate to Drain Charge(Note2)		Q_{GD}	-	12	-	nC

Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified







Characteristics	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Maximun Body-Diode Continuous Current		I_S	-	-	160	A
Drain-Source Diode Forward Voltage	$V_{GS}=0V, I_S=20A, T_J=25^\circ C$	V_{SD}	-	-	1.2	V
Reverse Recovery Time(Note2)	$T_J = 25^\circ C, I_F=60A$ $di / dt = 100 A/\mu s$	trr	-	35	-	ns
Reverse Recovery Charge(Note2)		Q_{rr}	-	30	-	nC

Note2:Pulse test: 300 μs pulse width, 2 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

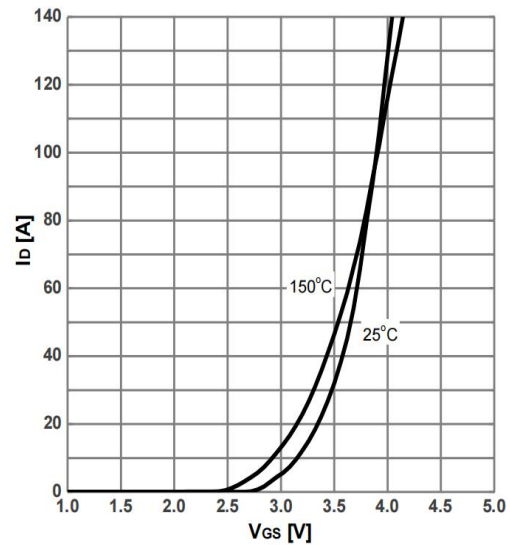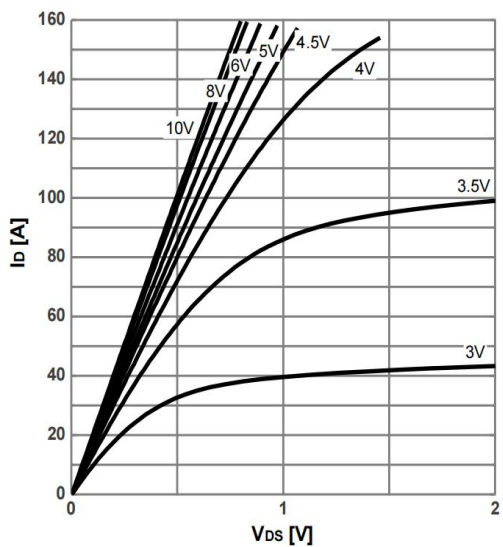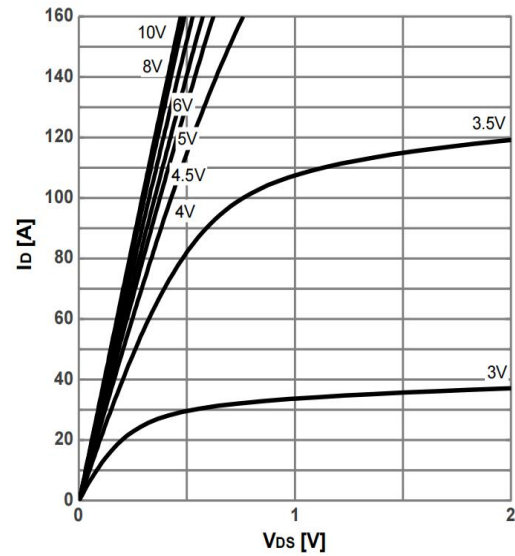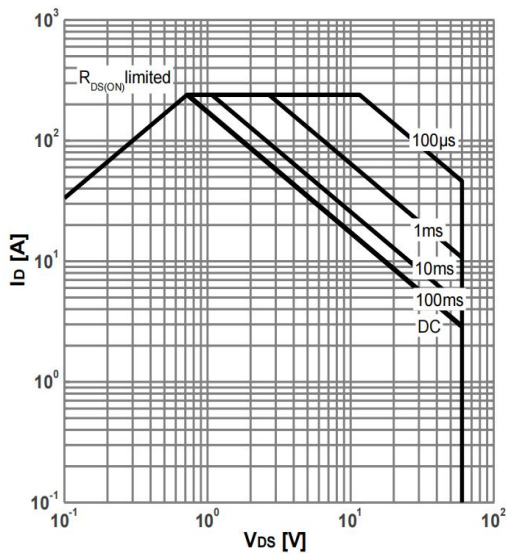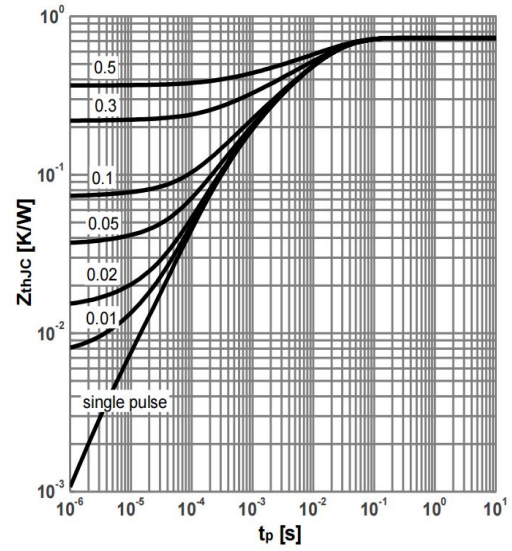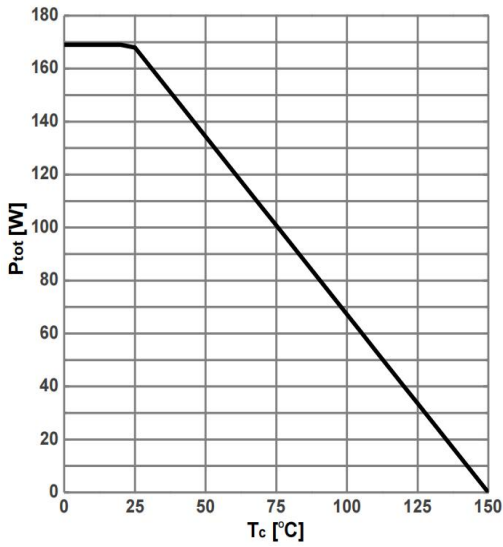

RATINGS AND CHARACTERISTIC CURVES

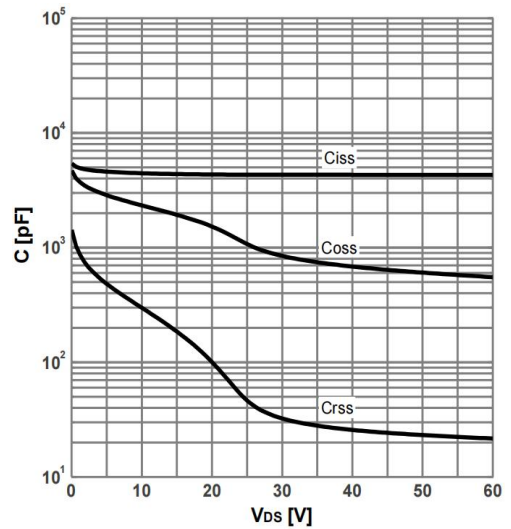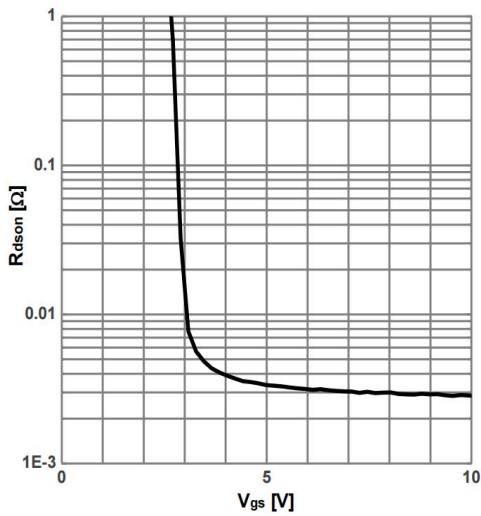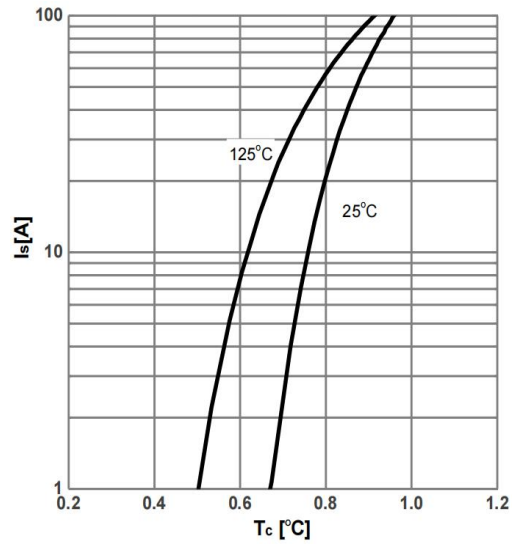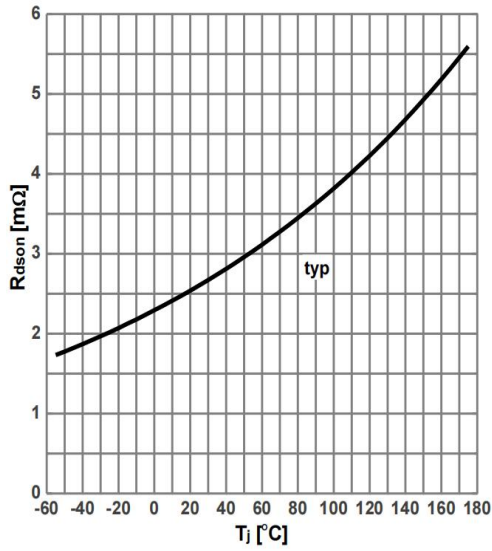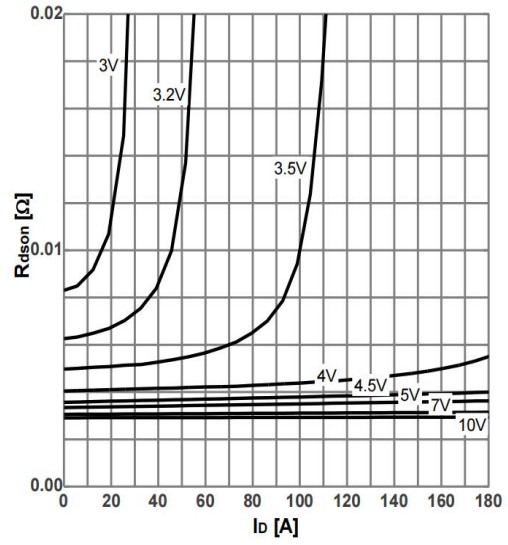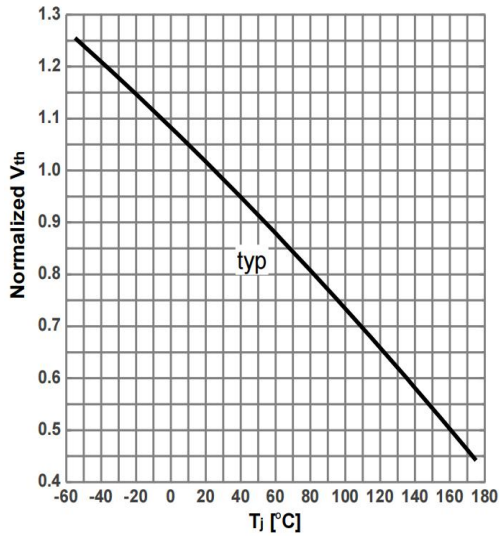

Package Outline Dimensions Millimeters

PDFN5*6-8L

	Dim.	Min.	Max.
	A	4.8	5.2
	B	0.25	0.35
	C	1	1.2
	C1	Typ0.254	
	C2	Typ0.254	
	E	Typ1.27	
	L	6	6.3
	L1	5.7	6
	L2	Max0.2	
	R	Typ13°	
	All Dimensions in millimeter		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#)
[BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#)
[DMNH15H110SK3-13](#) [SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#)