

GPS & GLONASS Receiver (G-Mouse)

1. Product Information

- 1.1 Product Name :** GT-902PGG (Adhesive Mount)
GT-902PMGG (Magnetic Mount)



1.2 Product Description:

GT-902P(M)GG with 1pps (1 pulse per second) output, is a compact, high performance, and low power consumption G-Mouse.

It uses the chipset of u-blox UBX-M8030-KT which can track up to 72 channels at a time and perform fast TTFF in weak signal environments.

GT-902P(M)GG is suitable for the following applications:

- Automotive navigation
- Personal positioning
- Fleet management
- Marine navigation

1.3 Product Features:

- 1 pps output
- High performance and low power consumption GNSS Chipset
- Very high sensitivity
- Extremely fast TTFF (Time To First Fix) at low signal level
- Chipset protocol

1.4 Product Specifications

GNSS Performance

| GNSS Performance | |
|--------------------------------|--|
| Chipset | UBX-M8030-KT |
| Frequency | GPS/QZSS L1 C/A GLONASS L10F SBAS L1 C/A:WAAS, EGNOS, MSAS |
| Code | C/A Code |
| Protocol | NMEA 0183 Default:GGA,GSA,GSV,RMC Support:VTG,GLL,TXT binary and NMEA Command |
| Available Baud Rate | 9,600 bps |
| Channels | 72 |
| Sensitivity | Tracking:-167dBm Reacquisition:-160dBm ColdStart:-148dBm HotStart:-156dBm |
| Cold Start | 26 seconds, average |
| Aided Start | 2 seconds, average |
| Hot Start | 1 second, average |
| Accuracy | HorizontalPosition:Autonomous<2.5m average, SBAS < 2.0m average Velocity: 0.1 m/s Timepulse signal: RMS 30 ns |
| Maximum Altitude | 50,000 meter |
| Maximum Velocity | 500 m/s(1000 knots) |
| Dynamics | ≦ 4G |
| Update Rate | Single GNSS up to 18Hz Concurrent GNSS up to 10Hz |
| A-GPS | AssistNow on-line and off-line |
| Interface | |
| I/O Pins | 1 serial ports |
| Physical Characteristic | |
| Dimensions | 45.00mm * 38.00 mm * 14.30mm |

1.5 DC Electrical characteristics

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|------------------------------|------------------|--|------|--------------------------------|--------------------|----------------------|
| Input Voltage | VCC | | 3.0 | 3.3 | 5.5 | V |
| Input Backup Battery Voltage | V_BCKP | | 2.0 | | 3.6 | V |
| Supply Current | I _{ss} | VCC = 3.3V, w/o active antenna, Peak Acquisition Tracking Standby | | 24 16 ⁽²⁾ 365 | 150 ⁽¹⁾ | mA mA mA uA |
| Backup Battery Current | I _{bat} | VCC = 0V | | 7 | | uA |
| High Level Input Voltage | V _{IH} | | 2.0 | | 3.6 | V |
| Low Level Input Voltage | V _{IL} | | -0.3 | | 0.8 | V |
| High Level Input Current | I _{IH} | no pull-up or down | -1 | | 1 | uA |
| Low Level Input Current | I _{IL} | no pull-up or down | -1 | | 1 | uA |
| High Level Output Voltage | V _{OH} | | 2.4 | | 3.3 | V |
| Low Level Output Voltage | V _{OL} | | | | 0.4 | V |
| High Level Output Current | I _{OH} | | | 2 | | mA |
| Low Level Output Current | I _{OL} | | | 2 | | mA |

Note 1: This happens when downloading AGPS data to Module.

Note 2: Measured when position fix (1Hz) is available, input voltage is 3.3V and the function of self-generated ephemeris prediction is inactive.


Temperature characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|-----------------------|------------------|------|------|------|-------|
| Operating Temperature | T _{opr} | -40 | 25 | 85 | °C |
| Storage Temperature | T _{stg} | -40 | 25 | 85 | °C |

2. Physical Dimension

(Customized Specifications are Welcome.)

GT-902P(M)GG-E25 GT-902P(M)GG-E35

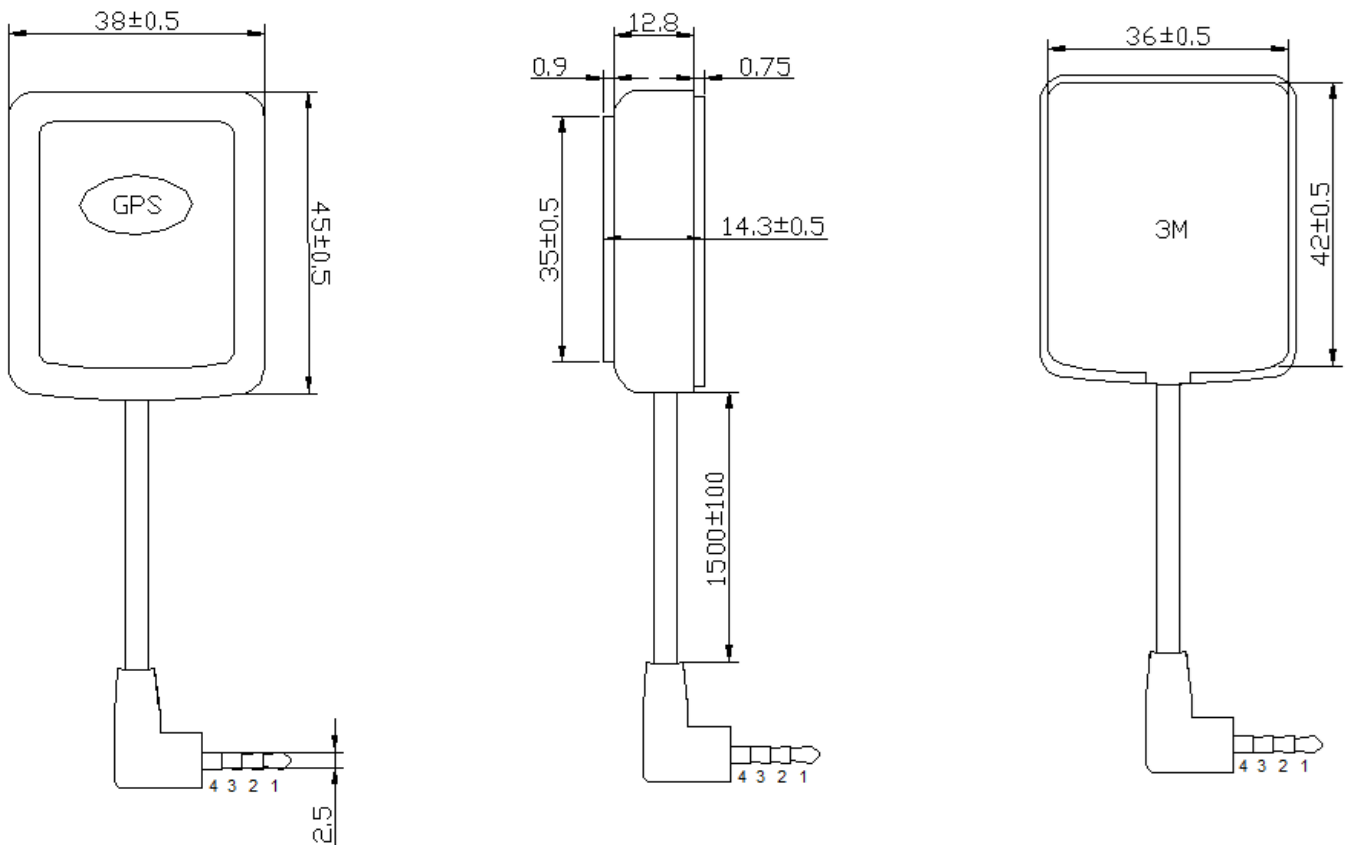

| IO Interface | Voltage level |
|-------------------------------|-----------------|
| 4 pin 2.5/3.5mm Earphone Jack | UART(TTL level) |

| CN1 Pin | Pin define | Level |
|---------|------------|-------------|
| 1 | Vcc | 3.0—5.0V DC |
| 2 | 1pps | TTL output |
| 3 | TXD | TTL output |
| 4 | GND | Ground |

※For the best time pulse performance, it is recommended to disable QZSS and SBAS subsystem.

3. NMEA 0183 Protocol

The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. GPS specific messages all start with \$GPxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

GT-902P(M)GG support the following NMEA-0183 messages: GGA, GLL,GSA, GSV, RMC and VTG.

Table 1: NMEA-0183 Output Messages

| NMEA Record | DESCRIPTION |
|-------------|--|
| GGA | Global positioning system fixed data |
| GLL | Geographic position—latitude/longitude |
| GSA | GNSS DOP and active satellites |
| GSV | GNSS satellites in view |
| RMC | Recommended minimum specific GNSS data |
| VTG | Course over ground and ground speed |

GGA-Global Positioning System Fixed Data

Table 2 contains the values of the following example:

\$GPGGA, 161229.487,3723.24751,N, 12158.34160,W, 1,07,1.0,9.0,M.0000*18

Table 2: GGA Data Format

| Name | Example | Units | Description |
|------------------------|-------------|--------|-----------------------------------|
| Message ID | \$GPGGA | | GGA protocol header |
| UTC Position | 161229.487 | | hhmmss.sss |
| Latitude | 3723.24571 | | ddmm.mmmmm |
| N/S indicator | N | | N=north or S=south |
| Longitude | 12158.34160 | | ddmm.mmmmm |
| E/W Indicator | W | | E=east or W=west |
| Position Fix Indicator | 1 | | See Table 2-1 |
| Satellites Used | 07 | | Range 0 to 12 |
| HDOP | 1.0 | | Horizontal Dilution of Precision |
| MSL Altitude | 9.0 | meters | |
| Units | M | meters | |
| Geoids Separation | | meters | |
| Units | M | meters | |
| Age of Diff.Corr. | | second | Null fields when DGPS is not Used |
| Diff.Ref.Station ID | 0000 | | |
| Checksum | *18 | | |
| <CR><LF> | | | End of message termination |

Table 2-1: Position Fix Indicators

| Value | Description |
|-------|---------------------------------------|
| 0 | Fix not available or invalid |
| 1 | GPS SPS Mode, fix valid |
| 2 | Differential GPS, SPS Mode, fix valid |
| 3 | GPS PPS Mode, fix valid |

GLL-Geographic Position – Latitude/Longitude

Table 3 contains the values of the following example:

\$GPGLL , 3723.24755, N,12158.34161,W,161229.487, A*2C.

Table 3: GLL Data Format

| Name | Example | Units | Description |
|---------------|-------------|-------|----------------------------------|
| Message ID | \$GPGLL | | GLL protocol header |
| Latitude | 3723.24755 | | Ddmm.mmmmm |
| N/S Indicator | N | | N=north or S=south |
| Longitude | 12158.34161 | | ddmm.mmmmm |
| E/W Indicator | W | | E=east orW=west |
| UTC Position | 161229.487 | | Hhmmss.sss |
| Status | A | | A=data valid or V=data not valid |
| Checksum | *2C | | |
| <CR><LF> | | | End of message termination |

GSA-GNSS DOP and Active Satellites

Table 4 contains the values of the following example:

\$GPGSA , A, 3, 07, 02, 26,27, 09, 04,15, , , , , , 1.8,1.0,1.5*33.

Table 4: GSA Data Format

| Name | Example | Units | Description |
|----------------|---------|-------|----------------------------------|
| Message ID | \$GPGSA | | GSA protocol header |
| Mode 1 | A | | See Table 4-1 |
| Mode 2 | 3 | | See Table 4-2 |
| Satellite Used | 07 | | Sv on Channel 1 |
| Satellite Used | 02 | | Sv on Channel 2 |
| ... | ... | | ... |
| Satellite Used | | | Sv on Channel 12 |
| PDOP | 1.8 | | Position Dilution of Precision |
| HDOP | 1.0 | | Horizontal Dilution of Precision |
| VDOP | 1.5 | | Vertical Dilution of Precision |
| Checksum | *33 | | |
| <CR><LF> | | | End of message termination |

Table 4-1: Mode 1

| Value | Description |
|-------|-------------------|
| 1 | Fix not available |
| 2 | 2D |
| 3 | 3D |

Table 4-2: Mode 2

| Value | Description |
|-------|---|
| M | Manual-forced to operate in 2D or 3D mode |
| A | Automatic-allowed to automatically switch 2D/3D |

GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV , 2, 1, 07, 07, 79,048, 42, 02, 51,062, 43, 26, 36,256, 42, 27, 27, 138,42*71

\$GPGSV, 2, 2, 07, 09, 23,313, 42, 04, 19, 159, 41, 15,12,041, 42*41.

Table 5: GGA Data Format

| Name | Example | Units | Description |
|--------------------|---------|---------|---------------------------------------|
| Message ID | \$GPGSV | | GSV protocol header |
| Number ofMessage | 2 | | Range 1 to 3 |
| Message Number | 1 | | Range 1 to 3 |
| Satellites in View | 07 | | |
| Satellite ID | 07 | | Channel 1(Range 1 to 32) |
| Elevation | 79 | degrees | Channel 1(Maximum 90) |
| Azinmuth | 048 | degrees | Channel 1(True, Range 0 to 359) |
| SNR(C/NO) | 42 | dBHz | Range 0 to 99,null when not tracking |
| ... | | | ... |
| Satellite ID | 27 | | Channel 4(Range 1 to 32) |
| Elevation | 27 | degrees | Channel 4(Maximum 90) |
| Azimuth | 138 | degrees | Channel 4(True, Range 0 to 359) |
| SNR(C/NO) | 42 | dBHz | Range 0 to 99, null when not tracking |
| Checksum | *71 | | |
| <CR><LF> | | | End of message termination |

Depending on the number of satellites tracked multiple messages of GSV data may berequired

RMC-Recommended Minimum Specific GNSS Data

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.24751, N, 12158.34161, W, 0.13, 309.62, 120598,, *10

Table 6: RMC Data Format

| Name | Example | Units | Description |
|--------------------|-------------|---------|----------------------------------|
| Message ID | \$GPRMC | | RMC protocol header |
| UTS Position | 161229.487 | | hhmmss.sss |
| Status | A | | A=data valid or V=data not valid |
| Latitude | 3723.24751 | | ddmm.mmmmm |
| N/S Indicator | N | | N=north or S=south |
| Longitude | 12158.34161 | | Ddmm.mmmmm |
| E/W Indicator | W | | E=east or W=west |
| Speed Over Ground | 0.13 | Knots | |
| Course Over Ground | 309.62 | Degrees | True |
| Ground | | | |
| Date | 120598 | | Dummy |
| Magnetic variation | | Degrees | E=east or W=west |
| Checksum | *10 | | |
| <CR><LF> | | | End of message termination |

VTG-Course Over Ground and Ground Speed

Table 7 contains the values of the following example:

\$GPVTG, 309.62, T, M, 0.13, N, 0.2, K*6E

Table 7: VTG Data Format

| Name | Example | Units | Description |
|------------|---------|---------|----------------------------|
| Message ID | \$GPVTG | | VTG protocol header |
| Course | 309.62 | Degrees | Measured heading |
| Reference | T | | True |
| Course | | Degrees | Measured heading |
| Reference | M | | Magnetic |
| Speed | 0.13 | Knots | Measured horizontal speed |
| Units | N | | Knots |
| Speed | 0.2 | Km/hr | Measured horizontal speed |
| Units | K | | Kilometer per hour |
| Checksum | K | | Kilometer per hour |
| Date | *6E | | |
| <CR><LF> | | | End of message termination |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [GPS Modules](#) category:

Click to view products by [YIC](#) manufacturer:

Other Similar products are found below :

[A5135-H](#) [EWM-G109H01E](#) [ISM3333-C6.1](#) [S2-106ZN](#) [S2-105V4-Z185K](#) [MIKROE-4150](#) [GPS-11858](#) [4037735104327](#) [RXM-GNSS-TM-T](#)
[EWM-G108H01E](#) [DD-14239](#) [GPS-10922](#) [GPS-12751](#) [NEO-M8P-2](#) [SIM28ML](#) [RXM-GNSS-GM-T](#) [SIM28](#) [M10578-A3](#) [M10578-A3-U2](#)
[TEL0132](#) [POL-2G](#) [POL-3G](#) [FT-X-GPS](#) [GPS-13740](#) [PKG300060P](#) [PKG300071](#) [PKG300071P](#) [PKG900000000271T](#) [PKG900000000853P](#)
[PKG900000000853T](#) [EZ-GPS-G](#) [A2235H](#) [RXM-GNSS-TM-B](#) [RXM-GPS-F4-T](#) [RXM-GPS-FM-B](#) [RXM-GPS-FM-T](#) [RXM-GPS-R4-T](#)
[A1084-A](#) [A2100-A](#) [A2200-A](#) [A2235-H](#) [A5100-A](#) [28504](#) [L26ADR-S89](#) [L26T-S89](#) [L89-S90](#) [101990655](#) [113990659](#) [GPS-13670](#) [TESEO-](#)
[LIV3F](#)