

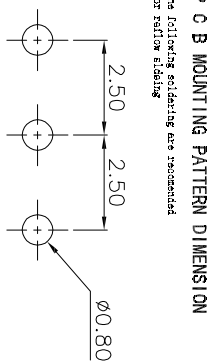



手柄尺寸		
F	K	Y
1.5*1.5	1.6	3.6
2.0*2.0	2.1	4.0

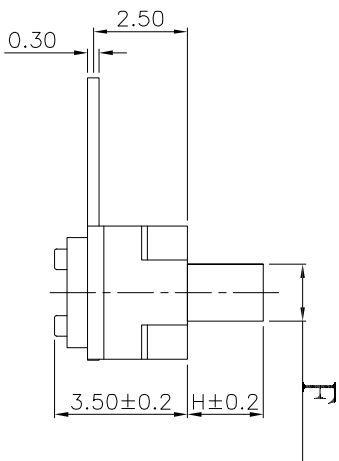

P C B MOUNTING PATTERN DIMENSION
The following soldering are recommended for soldering

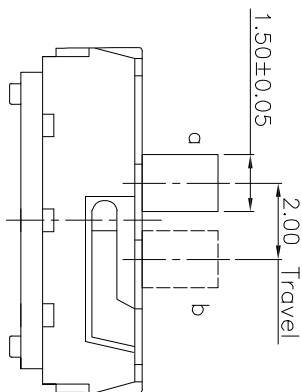

Specification

Part Name	Material	Specification
Operating Life	10,000	Cover plate silver plate white stainless steel
Contact rating	300mA@4V DC.	button black PA46/9T
Insulation resistance	>10Ω	spring ecru Stainless steel wire
Contact resistance	≤100MΩ	reed silver Phosphor bronze plated with silver
Dielectric Strength	250 V 50HZ 1Min	base black PA46/9T/LCP
Travel	0.2±0.1mm	terminal silver Phosphor copper plating silver

Mechanical

P/N	Operation Force(gf)	Height mm	Hook	Leads Spacing (mm)	Ground (mm)	Pegs (mm)
YSS-0	2	A	2	1.5±0.15	T	0
		B	3	2.0±0.20	0	0

X: ±0.50	X°: ±2°	UNITS
.X ±0.30	.X° ±1°	mm
.XX ±0.10	.XX° ±0.5°	MAT'L
XXX ±0.05		

FINISH	FINISH
Q'TY	Q'TY



深圳市怡远科技有限公司
SHENZHEN YIYUAN TECHNOLOGY CO.,LTD

PART NO. YSS-0

TITLE: 大六立式三脚拨动开关

APPD: RODGER

DWG NO: YSS-0

CHKD: RDC

SCALE SHEET REV.

DR: BILLY WANG 2020/09/21

1/1 1/1 A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [YIYUAN](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHS133K](#) [MMD](#) [MSS12A](#) [1825160-3](#) [1825167-2](#) [K232CB](#) [25139NLDB](#) [25449NAH](#) [1825078-1](#)
[1825080-4](#) [1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GH46P000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#) [M42A](#)
[TG36P000000](#) [AYZ0202AG](#) [L203091MS02Q](#) [4-1437581-7](#) [X2225CR-437W](#) [48BFSP3M2QT](#) [1101M1S3ZB8E2](#) [1-1437581-1](#)
[EG1218REDACTUATOR](#) [MSS2225G04](#) [TG39W000000](#) [MSS42G](#) [T105S1CWZBE](#) [SLB124145](#) [SLB1280R5](#) [SLB1340R45](#) [25136NLDB](#)
[TG39W000050](#) [25149NAH](#) [TG36Y000050](#) [NK236X693](#) [GE36P000001](#) [46204LRX](#) [EPS1PC2](#) [C56206L1X](#) [1977143-4](#) [1977144-4](#)
[1977145-4](#)