
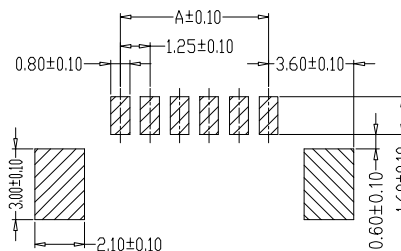


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20MΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon46、UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

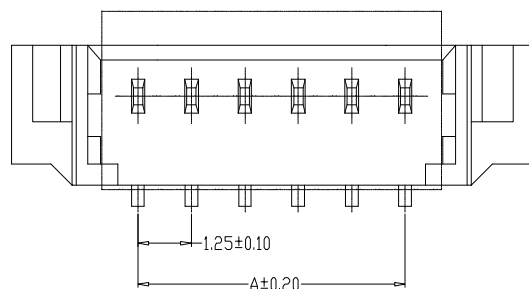

| 编号 | 尺寸 (mm) | |
|----------------|---------|-------|
| | A | B |
| YTC-A1251-03AB | 2.50 | 8.60 |
| YTC-A1251-04AB | 3.75 | 9.85 |
| YTC-A1251-05AB | 5.00 | 11.10 |
| YTC-A1251-06AB | 6.25 | 12.35 |

PCB LAYOUT

技术要求:

1. “ ”表示为重要尺寸:
- B塑料为闭口结构 2P-7P以上外形尺寸3.70±0.25

| | | | | |
|--|---------------------------|---------------|--------------|--|
| 深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO., LTD | | 页码 (SHEET) | 1/1 | 单位 (UNIT): MM |
| | | 版本 (REV) | A1 | 比例 (SCALE) |
| 品名 (ITEM NO) | 1.25间距闭口立贴 WAFER DIP TYPE | 日期 (DATE) | 2021. 10. 12 | |
| 料号 (PART NO) | YTC-A1251-**AB | 设计 (DESIGN) | LUO | |
| 图号 (DWG NO) | | 审核 (CHECKED) | ROGER LI | GENERAL TOLERANCE X.±0.25 X.±2" .XX±0.20 .X±1" .XX±0.15 .XX±0.5" .XXX±0.10 .XXX±0.5" |
| | | 核准 (APPROVED) | ROC ZHAO | |

These drawings and specifications are Shenzhen Yiyuan Technology Co Ltd.The property should not be copied. Without Shenzhen Yiyuan Technology Co. Ltd.Prior written consent to copy or use in any way. Email at info@yiyuanswitches.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [YIYUAN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)