


Bridge Rectifiers

GBP4005—GBP410

Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Glass passivated chip junction
- ◆ High forward surge capability

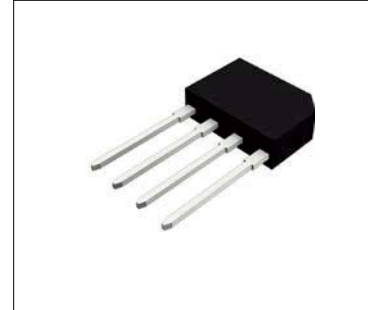

Mechanical Data

Case: GBP Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 260°C/10 seconds

Mounting Position: Any

Maximum Ratings & Electrical Characteristics

Ratings at TA = 25°C unless otherwise specified

Parameter	Symbol	GBP 4005	GBP 401	GBP 402	GBP 404	GBP 406	GBP 408	GBP 410	Unit	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Average forward rectified output current	$I_{F(AV)}$	4.0							A	
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	120							A	
Rating for fusig (t<8.3ms)	I^2t	59.76							A ² sec	
Maximum instantaneous forward voltage dropper leg at 2A	VF	1.0							V	
Maximum DC reverse current at rated DC blocking voltage per leg	T _J =25°C	IR							5.0	uA
	T _J =125°C									

Thermal Characteristics

Typical thermal resistance per leg (Note 1)	R _{θJA}	32	°C/W
	R _{θJL}	15	
Operating junction temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{STG}	-55 to +150	°C

Note

(1) Units mounted on PCB with 0.47×0.47(12×12mm) Copper Pads

Bridge Rectifiers

GBP4005—GBP410

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

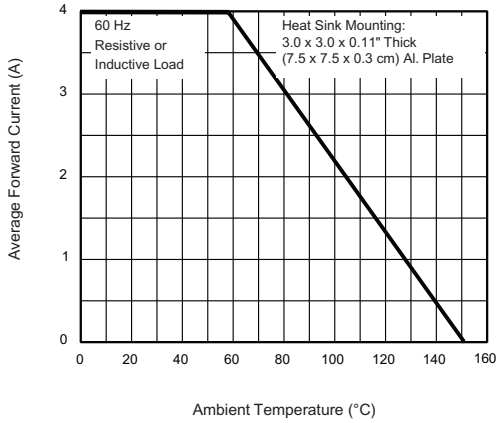


Figure 1. Forward Current Derating Curve

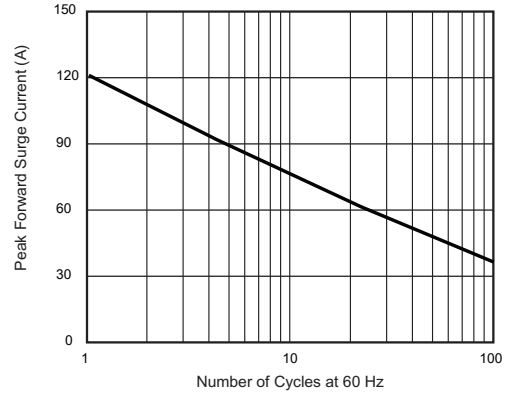


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Diode

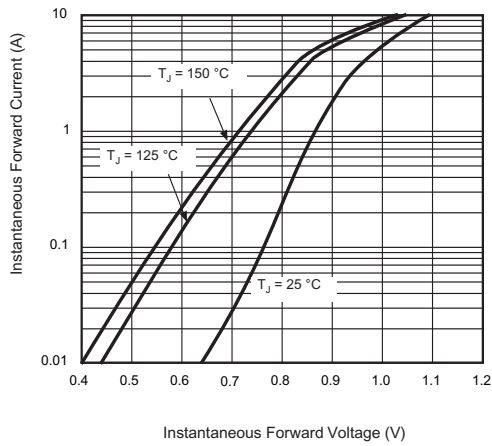


Figure 3. Typical Forward Characteristics Per Diode

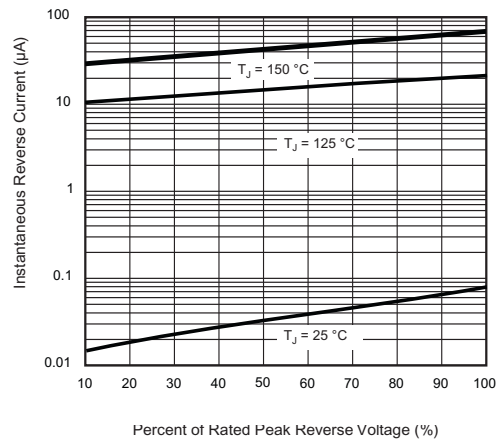


Figure 4. Typical Reverse Leakage Characteristics Per Diode

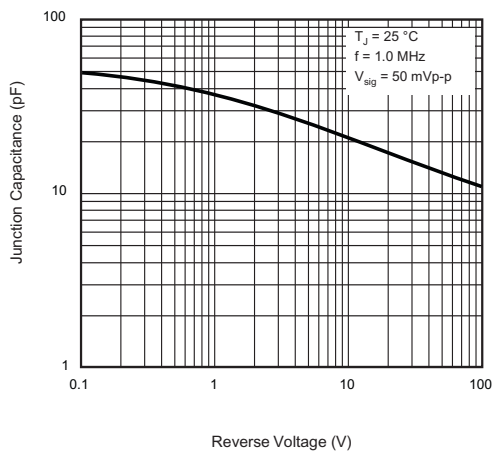


Figure 5. Typical Junction Capacitance Per Diode


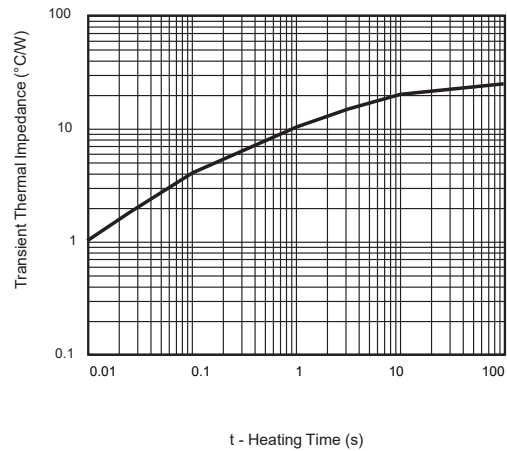


Figure 6. Typical Transient Thermal Impedance Per Diode

Bridge Rectifiers

GBP4005—GBP410

Package Outline Dimensions(unit:mm)

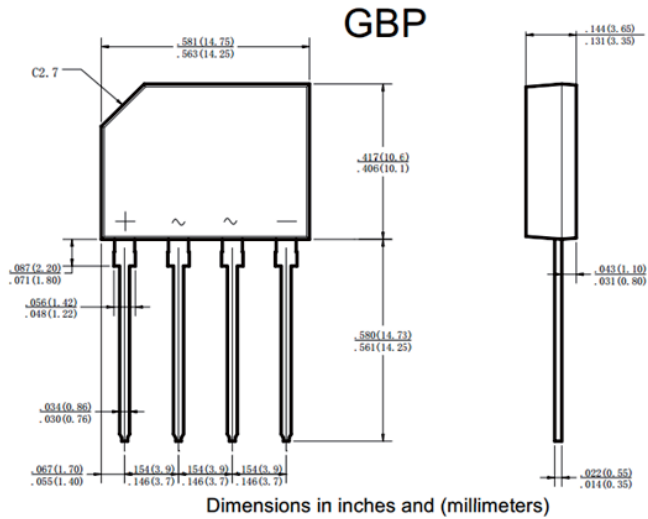

Ordering Information

Part No.	Marking	Package	Shipping	
GBP4005	GBP4005	GBP	300PCS /inner box	3000PCS /Box
GBP401	GBP401	GBP	300PCS /inner box	3000PCS /Box
GBP402	GBP402	GBP	300PCS /inner box	3000PCS /Box
GBP404	GBP404	GBP	300PCS /inner box	3000PCS /Box
GBP406	GBP406	GBP	300PCS /inner box	3000PCS /Box
GBP408	GBP408	GBP	300PCS /inner box	3000PCS /Box
GBP410	GBP410	GBP	300PCS /inner box	3000PCS /Box

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Yjsemi](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-](#)
[E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#)
[TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#)
[BU2006-E3/45](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-60MT120KPBF](#) [DB105-BP](#) [DF1510S](#)