




Bridge Rectifiers

MB2F—MB10F

Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Glass passivated chip junction
- ◆ High forward surge capability

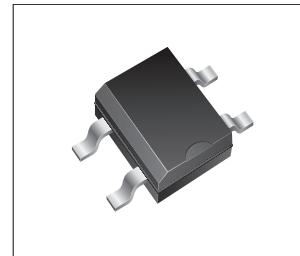

Mechanical Data

Case: MBF Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750,
Method 2026

High temperature soldering guaranteed: 260°C/10 seconds

Mounting Position: Any

Maximum Ratings & Electrical Characteristics

Ratings at TA = 25°C unless otherwise specified

| Characteristic | Symbol | MB2F | MB4F | MB6F | MB8F | MB10F | Units |
|---|--------|------|------|------|------|-------|-------|
| Peak repetitive reverse voltage | VRRM | 200 | 400 | 600 | 800 | 1000 | V |
| RMS reverse voltage | VRMS | 140 | 280 | 420 | 560 | 700 | V |
| DC blocking voltage | VDC | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward output current | IF(AV) | | | 0.8 | | | A |
| Peak forward surge current, 8.3ms single half-sine-wave, @TJ = 25°C | IFSM | | | 35 | | | A |
| Rating for fusing(t<8.3ms) | I2t | | | 5.1 | | | A2sec |
| Maximum instantaneous forward voltage @ 0.4A | VF | | | 1.0 | | | V |
| Maximum Reverse current Rated VR @TA =25°C | IR | | | 5 | | | μ A |
| @TA =125°C | | | | 50 | | | |

Thermal Characteristics

| Characteristic | Symbol | MB2F | MB4F | MB6F | MB8F | MB10F | Units |
|--------------------------------------|--------|------|-----------------|------|------|-------|-------|
| Typical thermal resistance (Note 1) | R ΘJA | | | 85 | | | °C /W |
| | R ΘJL | | | 20 | | | |
| Operating junction temperature range | TJ | | - 55 ---- + 150 | | | | °C |
| Storage temperature range | TSTG | | - 55 ---- + 150 | | | | °C |

Note

(1) (1) On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3 mm) pads



Bridge Rectifiers

MB2F—MB10F

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

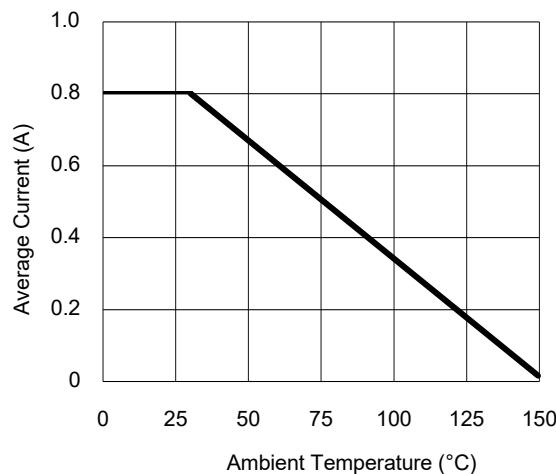


Fig.2- Surge Current Derating Curve

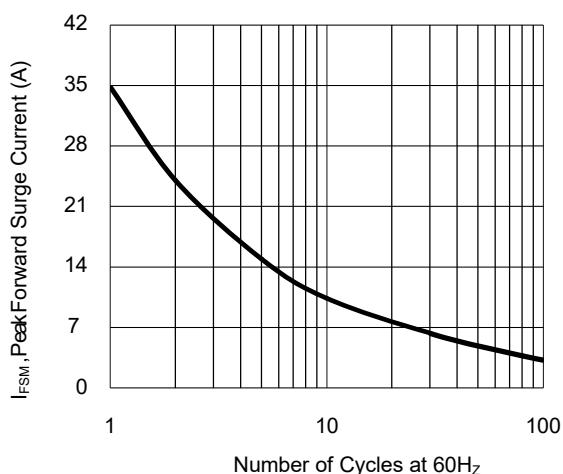


Fig.3- Typical Forward Voltage Characteristic


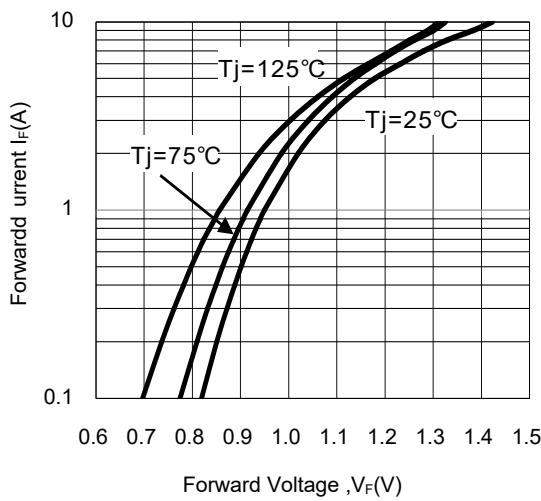


Fig.4- Typical Reverse Characteristic




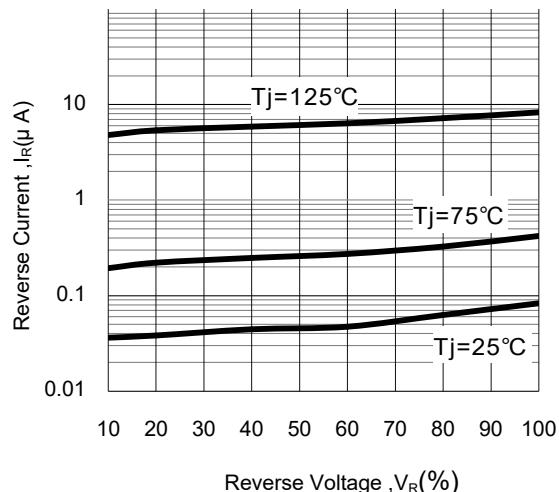


Bridge Rectifiers

MB2F—MB10F

Package Outline Dimensions(unit:mm)

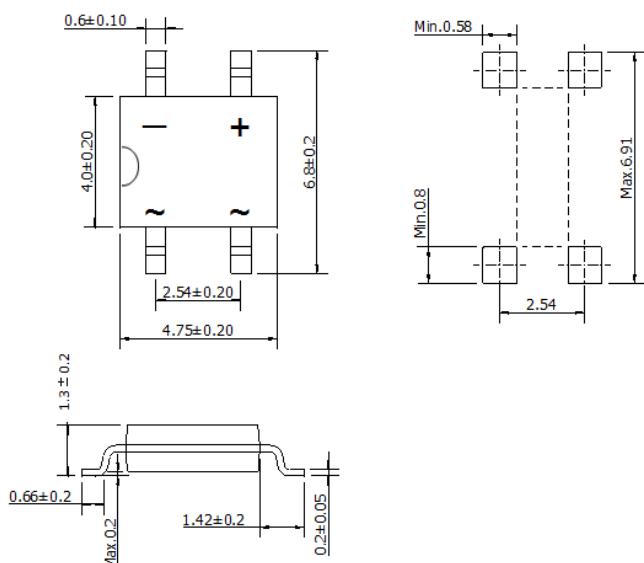

Mounting Pad Layout(unit:mm)

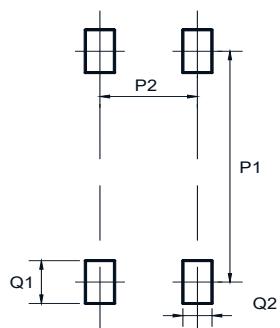

| Dim | Min |
|-----|-----|
| P1 | 6.0 |
| P2 | 2.5 |
| Q1 | 1.8 |
| Q2 | 1.2 |

Ordering Information

| Part No. | Marking | Package | Shipping |
|----------|---------|---------|--------------------|
| MB2F | MB2F | MBF | 5000PCS /Tape&Reel |
| MB4F | MB4F | MBF | 5000PCS /Tape&Reel |
| MB6F | MB6F | MBF | 5000PCS /Tape&Reel |
| MB8F | MB8F | MBF | 5000PCS /Tape&Reel |
| MB10F | MB10F | MBF | 5000PCS /Tape&Reel |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Yjsemi](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#)
[G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#)
[TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#)
[BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-2KBB60](#) [VS-60MT120KPBF](#) [DB105-BP](#) [DF1510S](#)