

Surface Mount Schottky Rectifier

SS32A—SS320A

Features

- ◆ Low profile package
- ◆ Ideal for automated placement
- ◆ Guardring for overvoltage protection
- ◆ Low power losses, high efficiency
- ◆ High forward surge capability



Mechanical Data

Case: DO-214AC(SMA) Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Cathode line denotes the cathode end

Mounting Position: Any

Maximum Ratings & Electrical Characteristics

Ratings at TA = 25°C unless otherwise specified

Characteristic	Symbol	SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A	Units
Peak repetitive reverse voltage	VRRM	20	40	60	80	100	150	200	V
RMS reverse voltage	VRMS	14	28	42	56	70	105	140	V
DC blocking voltage	VDC	20	40	60	80	100	150	200	V
Maximum average forward output current	IF(AV)	3							A
Peak forward surge current, 8.3ms single half-sine-wave, @TJ = 25°C	IFSM	80							A
Rating for fusing(t<8.3ms)	I2t	26.56							A2sec
Maximum instantaneous forward voltage @ 3A	VF	0.55	0.7	0.85	0.9			V	
Maximum Reverse current Rated VR @TA =25°C	IR	0.5			0.1			mA	
		20			5				

Thermal Characteristics

Characteristic	Symbol	SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A	Units
Typical thermal resistance (Note 1)	R θJA	55							°C /W
	R θJL	17							
Operating junction temperature range	TJ	-55~+125			-55~+150			°C	
Storage temperature range	TSTG	-55~+150							°C

Note:

(1) Units mounted on P.C.B. with 5.0 x 5.0 mm land areas.

Surface Mount Schottky Rectifier

SS32A- SS320A

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

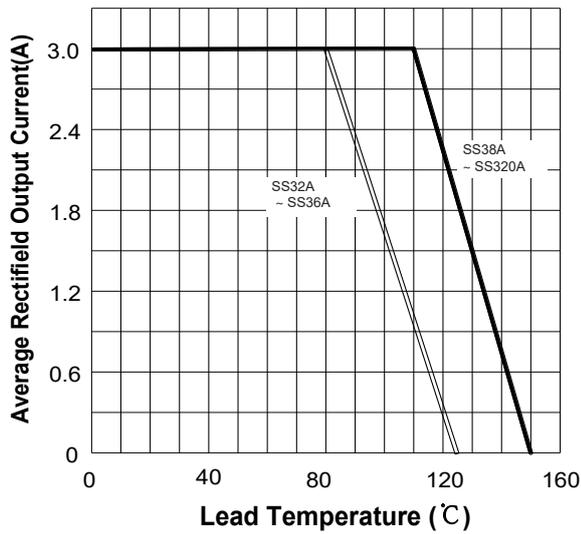


Fig.2- Surge Current Derating Curve

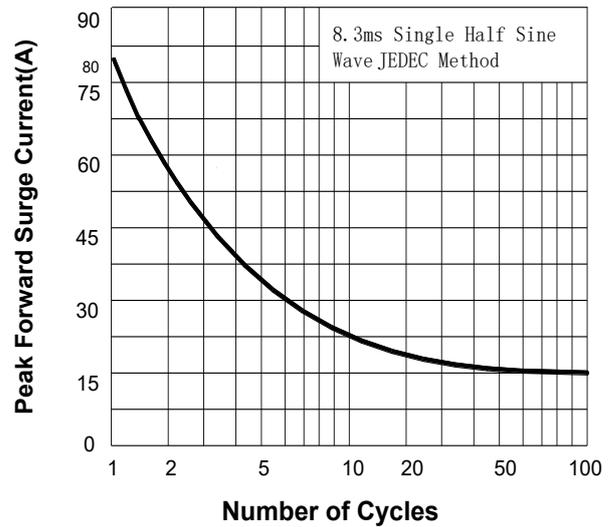


Fig.3- Typical Forward Voltage Characteristic


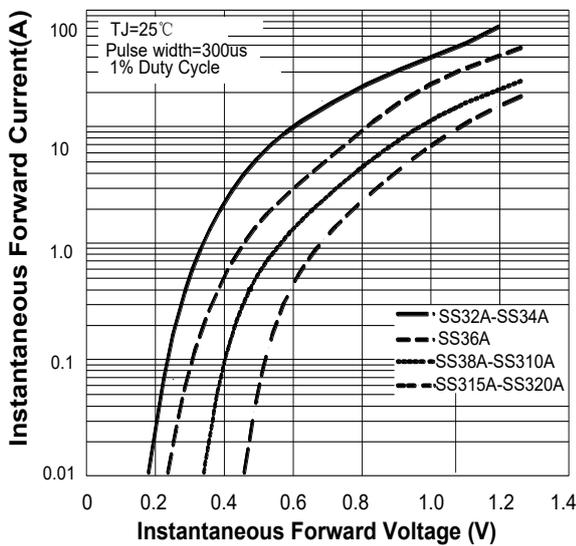


Fig.4- Typical Reverse Characteristic

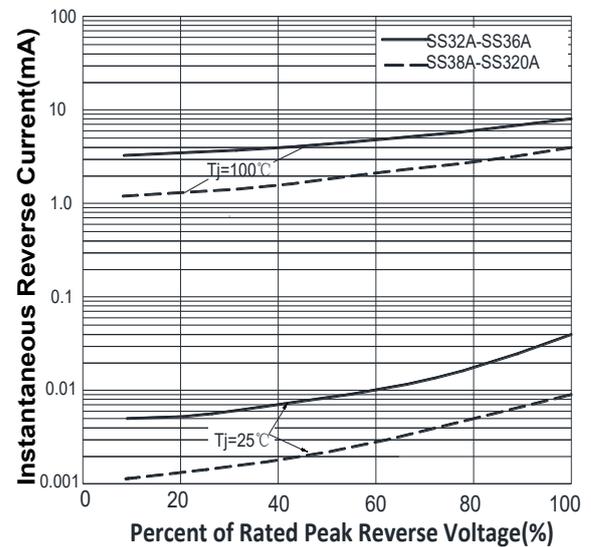


Surface Mount Schottky Rectifier


SS32A - SS320A

Package Outline Dimensions(unit:mm)

DO-214AC (SMA)

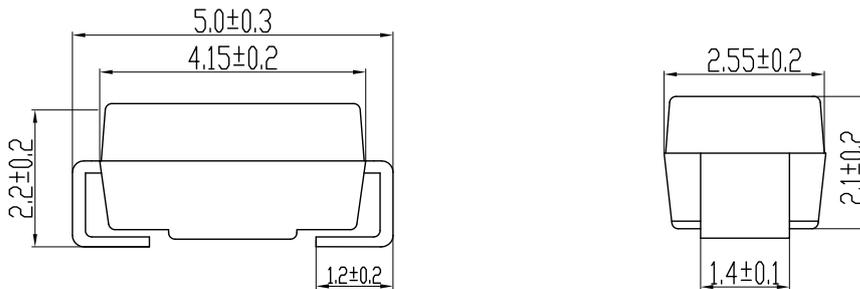

Mounting Pad Layout(unit:mm)

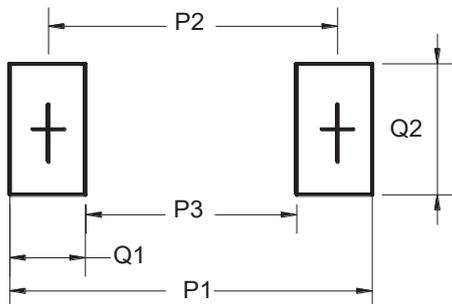

Dim	Millimeters
P1	6.50
P2	4.00
P3	1.50
Q1	2.50
Q2	1.70

Ordering Information

Part No.	Marking	Package	Shipping
SS32A	SS32A	SMA	5000PCS /Tape&Reel
SS34A	SS34A	SMA	5000PCS /Tape&Reel
SS36A	SS36A	SMA	5000PCS /Tape&Reel
SS38A	SS38A	SMA	5000PCS /Tape&Reel
SS310A	SS310A	SMA	5000PCS /Tape&Reel
SS315A	SS315A	SMA	5000PCS /Tape&Reel
SS320A	SS320A	SMA	5001PCS /Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Yjsemi](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)