


■ Features

- High rated current for circuit design.
- Design by special lead wire to prevent open circuit failure.
- Low cost with rugged reliability and performance fixed inductor.
- Operating temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$.

■ Applications

- TVs and Audio equipment.
- Notebook, Inkjet printer, Copying machine, Display monitor, Cellular phone.
- Switching Power Supply.
- Excellent as DC/DC converter boost or buck inductor.

■ Product Identification




(1) : Type

(2) : Dimensions

(3) : Inductance value

(4): Inductance Tolerance: N=±30%, M=±20%, K=±10%,

■ Shapes and Dimensions (Unit: mm)

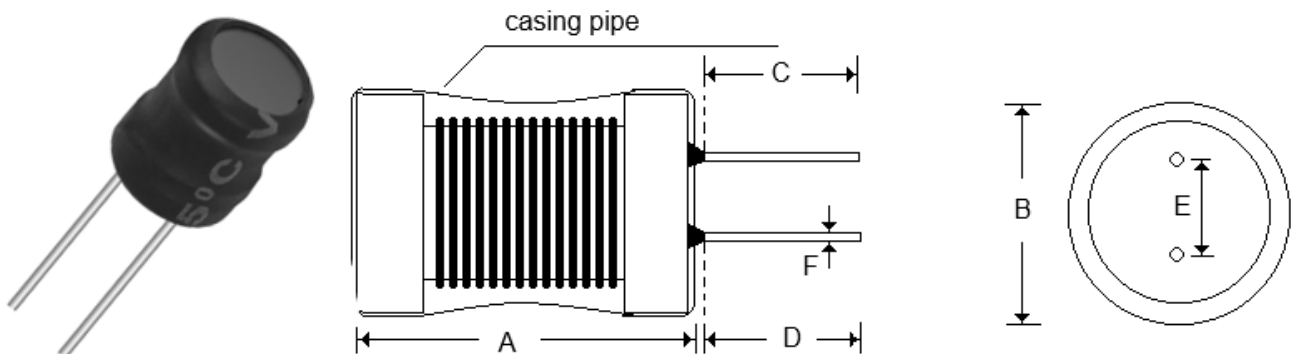

TYPE	A Max.	B Max.	C	D	E	F
YDPK1415	19.0	16.0	17.0±2.0	17.0±2.0	7.5±0.5	0.8±0.1

■ Electrical specification

Part Number	Inductance (mH)	Test Frequency	Max.DCR (Ω)	Isat (A)
YDPK1415-102K	1.0 \pm 10%	1KHz/0.25V	0.9	0.8


※ Design as Customer's Requested Specifications.

■ Reliability test

NO.	Items	Test Methods	Requirements
1	Lead terminal strength	A static pulling force of 5N in a direction parallel to the lead terminals for 60 \pm 5 seconds.	No terminal breakage or loosening.
2	Resistance to soldering heat test	Fix the samples on a 1.6mm thickness PCB, then dip the sample leads into a soldering bath of 270 \pm 5 $^{\circ}$ C up to the PCB for 5 \pm 1 seconds.	No significant abnormality in appearance. Deviation relative to initial value: L: Within \pm 10%
3	Solder ability test	Immerse the terminal in flux for 5 seconds. Then dip the terminal into a soldering bath of 245 \pm 5 $^{\circ}$ C for 2 \pm 0.5 seconds.	At least 90% of terminal electrode is covered by new solder.
4	Humidity test	Temperature: 40 $^{\circ}$ C \pm 2 $^{\circ}$ C Humidity : 90%~95%RH Duration: 96 \pm 4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within \pm 10%
5	High temperature storage test	Temperature: 85 $^{\circ}$ C \pm 2 $^{\circ}$ C Duration : 96 \pm 4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within \pm 10%
6	Low temperature storage test	Temperature : -25 $^{\circ}$ C \pm 2 $^{\circ}$ C Time: 96 \pm 4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within \pm 10%
7	Thermal shock test	First -25 \pm 5 $^{\circ}$ C for 30 \pm 3 minutes, last 85 \pm 5 $^{\circ}$ C 30 \pm 3 minutes as 1 cycles. Go through 10 cycles.	No significant abnormality in appearance. Deviation relative to initial value: L: Within \pm 10%

■ Soldering Conditions

Wave Soldering:

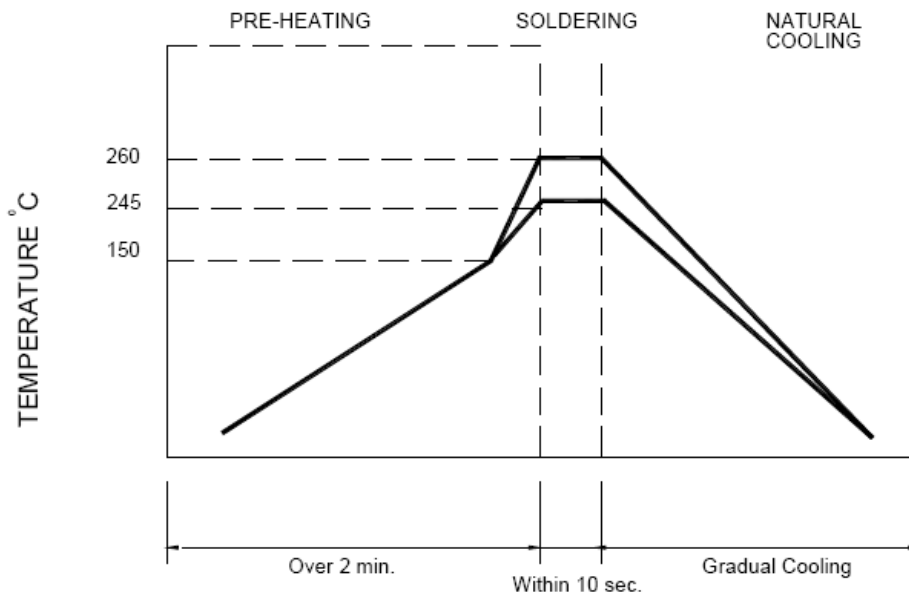

Note:


Never contact the ceramic with the iron tip

1.0mm tip diameter(max)


■ Material list

NO	ITEM	DESCRIPTION	SUPPLIER	RATING	UL FILE
1	Core	DR2W 14×15	JIACI		
		OR EQUIVALENT			
2	Wire	2UEWF ϕ 0.40mm	PROSPERITY	155°C	E196072
		OR EQUIVALENT			
3	TUBE	T-2 UL(Black)	QUANTAI	125°C	E227336
		OR EQUIVALENT			
4	PIN	CP Φ 0.80mm	HUACHENG		
REMARK:					

■ Package specification

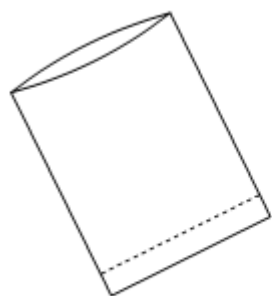

PE 袋



Type	Quantity(pcs)			Remark
	Bag	Inside box	Outer box	
YDPK1415	50	500	1000	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [YJYCOIN](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)