

■ Features

- SMD construction, and low profile.
- High Impedance and Excellent Frequency Characteristic.
- Self Electromagnetic Shielding.
- Low Magnetic Flux Leakage.

■ Applications


- LED Light, TV game, Monitor, etc.
- EMI common-mode noise.

■ Product Identification

$\frac{\text{YPCM}}{(1)}$ $\frac{\square\square\square\square}{(2)}$ $\frac{-\square\square\square}{(3)}$ $\frac{T}{(4)}$

- (1) : Type
- (2) : Dimensions
- (3) : Impedance
- (4) : Taping

■ Shapes and Dimensions (Unit: mm)

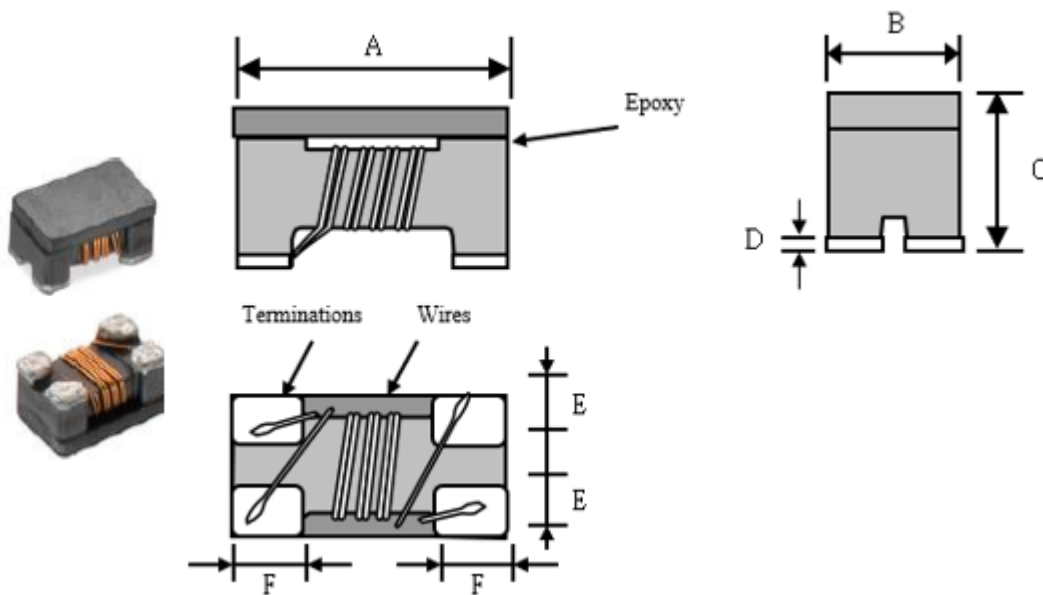


TYPE	A	B	C	D	E Typ.	F Typ.
YPCM3225A	3.2±0.2	2.5±0.2	2.2±0.2	0.2±0.1	0.80	0.65

Electrical Characteristics


Part Number	Z(Ω) Common mode Impedance @100MHz	DCR (Ω) Max.	Rated current Idc(A) Max.	Rated Voltage Vdc (V)Typical	Insulation Resistance IR (MΩ)Min.
YPCM3225A-501T-S1	500±25%	0.040	2.0	50	10

- ※ Operating Temperature: -40°C to +85°C
- ※ Storage Temperature and humidity: -20°C up to +40°C, 75% RH max.
- ※ Typical Heat Rating DC Current would cause an approximately ΔT of 40°C
- ※ If Use Wave soldering is there will be some risk. Re-flow soldering temperatures below 240 degrees, there will be unwitting risk.

Recommended Footprint(mm)

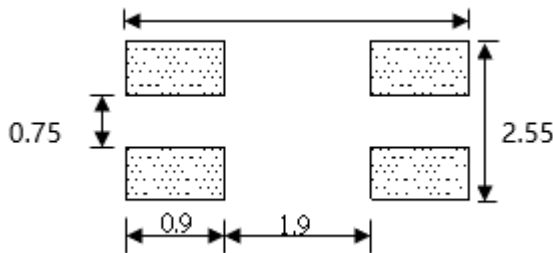


Performance Curves

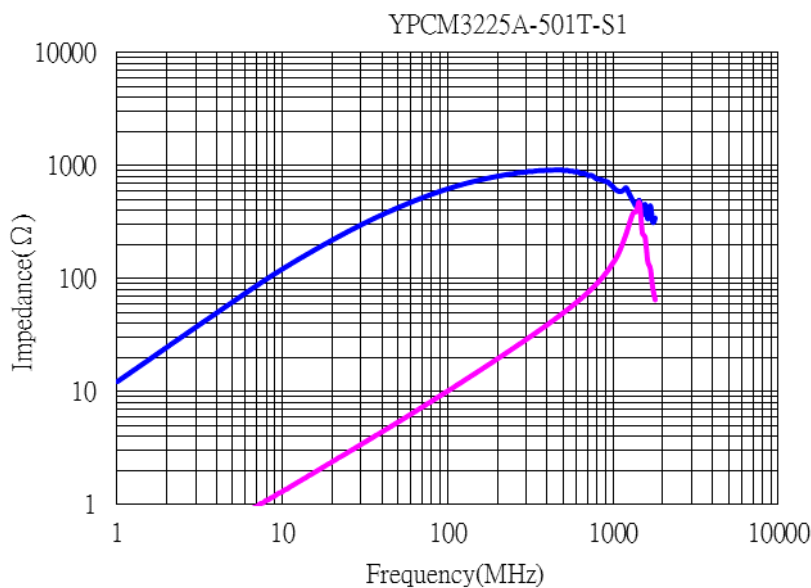

■ Test Equipment


Impedance

Measured by using Agilent 4291A RF Impedance Analyzer.

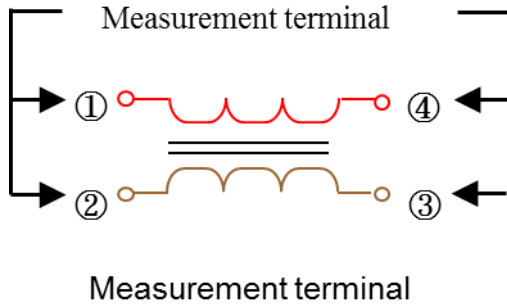

DC Resistance


Measured by using Chroma 16502 mill ohm meter.

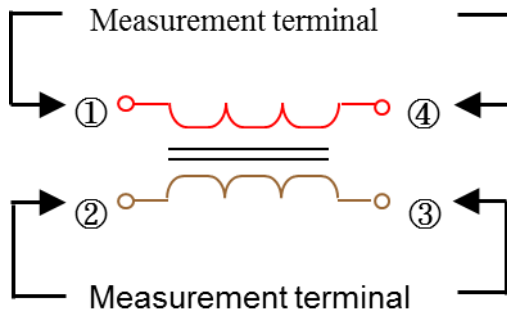


Insulation Resistance

Measured by using Chroma 19073


Measurement voltage : 50v ,Measurement time : 60 sec.

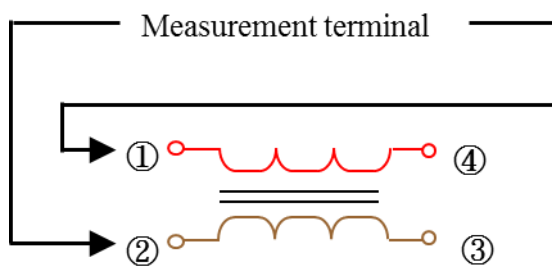

Recommended Soldering temp.graph

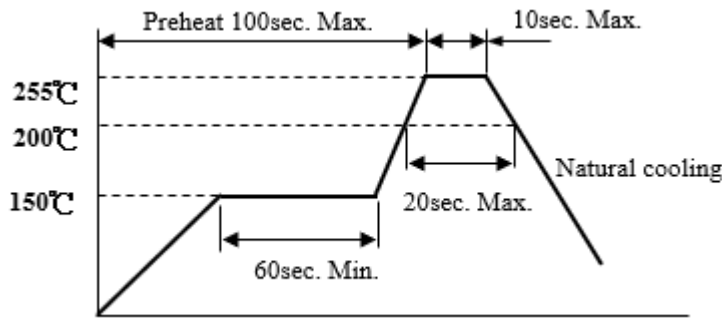


Mechanical Reliability

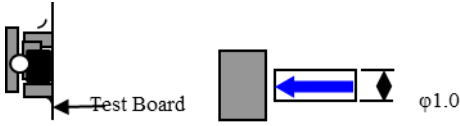Test	Method Used	Specification & Requirement										
Solderability	Solder heat proof: Preheating: 150 ±10°C 60 seconds Soldering: 245 ±5°C for 4 ±1 sec	The surface of terminal/pin tested shall be covered with new solder by 90%										
Solder Heat Resistance	Preheating:150°C 60secs Solder temperature: 260±5°C Flux:rosin Dip time:10±0.5 secs	Components should have not evidence of electrical and mechanical damage Impedance:within ±15% of initial value										
Terminal strength	Solder a chip to test substrate and then laterally apply a force in the arrow direction 	<table border="1"> <thead> <tr> <th>Series No.</th> <th>F (Kg)</th> </tr> </thead> <tbody> <tr> <td>1608</td> <td>0.5</td> </tr> <tr> <td>2012</td> <td>0.5</td> </tr> <tr> <td>3216</td> <td>1.0</td> </tr> <tr> <td>3225</td> <td>1.0</td> </tr> </tbody> </table>	Series No.	F (Kg)	1608	0.5	2012	0.5	3216	1.0	3225	1.0
Series No.	F (Kg)											
1608	0.5											
2012	0.5											
3216	1.0											
3225	1.0											

Endurance Reliability


Test	Method Used	Specification & Requirement
Thermal Shock Test	-65°C, (30 mins) -> room temp. (2 mins) -> 125°C, (30 mins) -> room temp. (2 mins) 50 cycles	Impedance change within ± 15% Without mechanical damage
High Temperature Exposure	Apply IDC current @ 60°C ambient Humidity: 90% Duration: 168 hrs	Impedance change within ± 15% Without mechanical damage
Low Temp. Storing	Storing Temp. -40 ±2 °C for total 168 +5/-0 hours	Impedance change within ± 15% Without mechanical damage
High Temp. Storing	Storing Temp. 125 ±2 °C for total 168 +5/-0 hours	Impedance change within ± 15% Without mechanical damage

■ Taping Dimensions(Unit:mm)

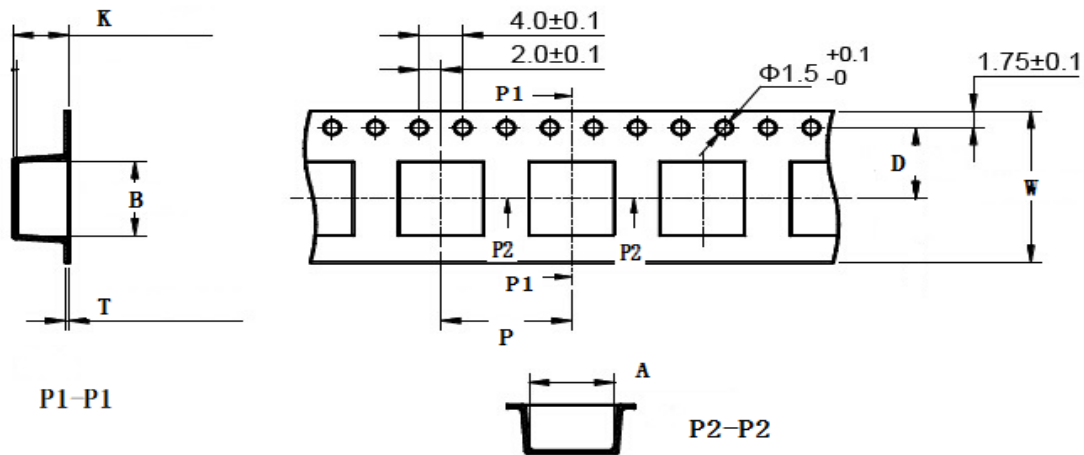


TYPE	W	A	B	D	P	K Max	T Max	MPQ
YPCM3225A	8.00	2.80	3.60	3.50	4.00	2.30	0.25	1000

■ Reel Dimensions(Unit:mm)

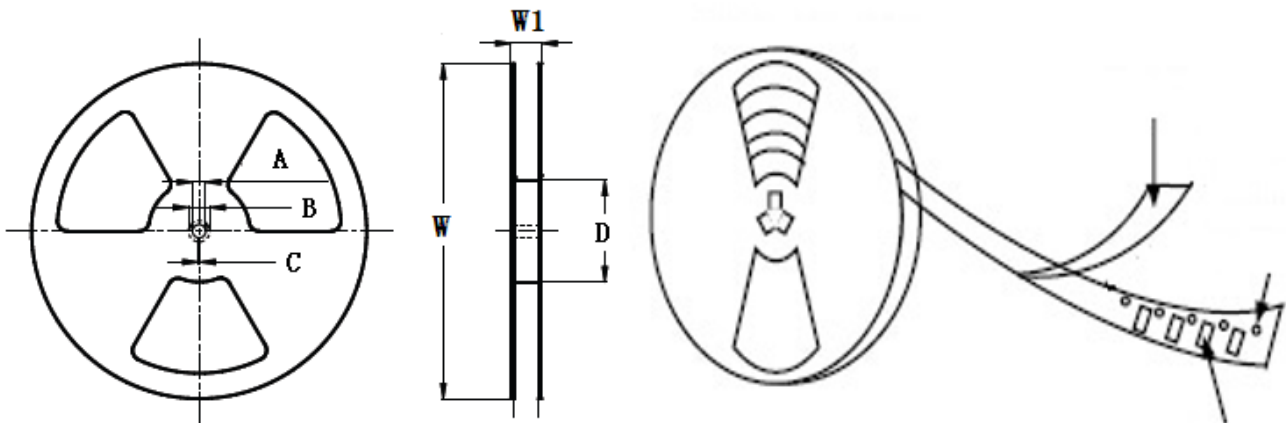


TYPE	W	W1	A	B	C	D
YPCM3225A	178±2.0	8.40±1.50	4.3±0.20	5.0±0.10	3.0±0.10	58±2.0

Direction of rolling

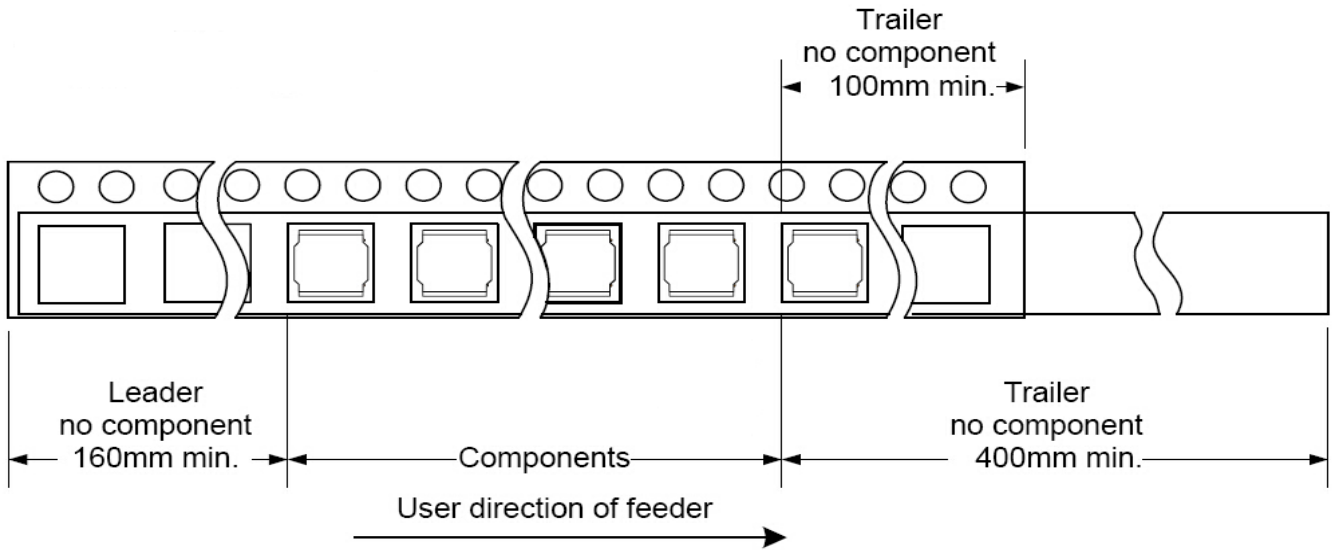

Cover tape peel off condition

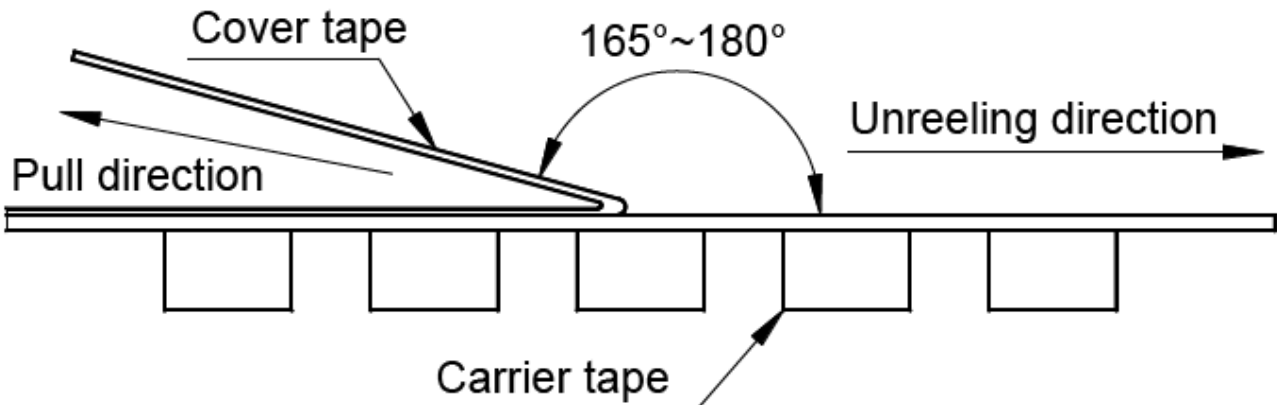

Cover tape peel force shall be 0.1N to 1.3N.

Reference peel speed 300±10mm/min.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [YJYCOIN](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#)
[UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [CM7060M132R-10](#) [UALW21HS072450](#)
[UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [36-00029-01](#) [PE-67531](#)
[TLH10UB](#) [113 0R5](#) [2752045447](#) [CM8663Z161B-10](#) [7351V](#) [CMF16-153131](#) [T8116NLT](#) [CMS2-10-R](#) [FE2X10-4-2NL](#) [T8003NLT](#) [CTX01-](#)
[13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [B82498B3221J000](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#)
[PAC6006.264NLT](#) [PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)