



# 规 格 书

## Aluminum Electrolytic Capacitors

### Specification For Approval

客户:

日期: 2023.9.5

Customer :

Date:

品名 Item : Aluminum Electrolytic Capacitors

型号 Series : LKD

版本 Version : 03

物料号 Customer P/N :

客户

Customer

批准

研发部

品保部

Approved by

R&D

QC

供应商

Supplier

批准

Approved by

审核

Checked by

拟制

Prepared by

上海永铭电子股份有限公司

张涛

工程技术部

李碧容

承认书请寄回一份

Please Return One Copy with Your Approval

上海永铭电子股份有限公司

Shanghai Yongming Electronic Co., Ltd.


Tel: 021-33617848 Fax: 021-33617128

[Http://www.sh-ymin.com](http://www.sh-ymin.com)

上海永铭电子股份有限公司 Shanghai Yongming Electronic Co.,Ltd.	铝电解电容器承认书 Aluminum Electrolytic Capacitors Specification	商标 
---	---	---

版本 Version	日期 Date	标志 Mark	页码 Page	内容 Content	目的 Aim	设计 Design	审核 Checked

名称 Name	承认书 Specification		
版本 Version	03	页数 Page	2
标准指南 Standard manual			

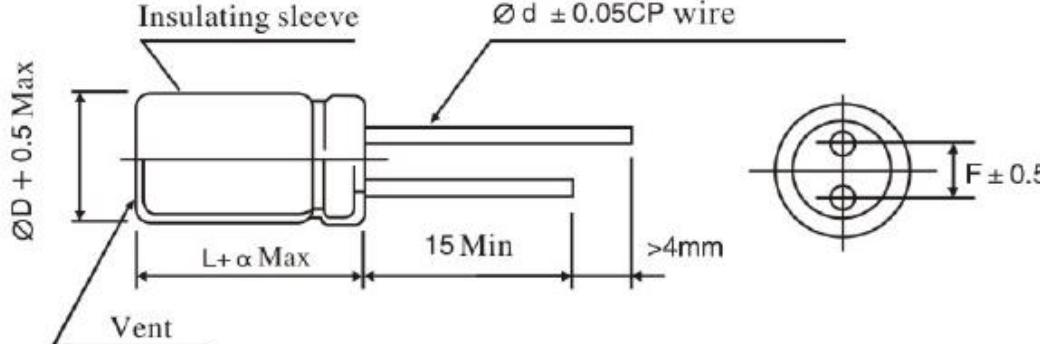客户名 Customer		系列 SERIES	LKD																																	
																																				
<p>Remark: capacitors with diameter more than 6.3 have safety vent</p>																																				
<b>FIG-1</b>																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">D</td><td style="padding: 2px;">5</td><td style="padding: 2px;">6.3</td><td style="padding: 2px;">8</td><td style="padding: 2px;">10</td><td style="padding: 2px;">12.5</td><td style="padding: 2px;">16</td><td style="padding: 2px;">18</td><td style="padding: 2px;">20</td><td style="padding: 2px;">22</td><td style="padding: 2px;">25</td></tr> <tr> <td style="padding: 2px;">d</td><td style="padding: 2px;">0.5</td><td style="padding: 2px;">0.5</td><td style="padding: 2px;">0.6</td><td style="padding: 2px;">0.6</td><td style="padding: 2px;">0.6</td><td style="padding: 2px;">0.8</td><td style="padding: 2px;">0.8</td><td style="padding: 2px;">0.8</td><td style="padding: 2px;">1.0</td><td style="padding: 2px;">1.0</td></tr> <tr> <td style="padding: 2px;">F</td><td style="padding: 2px;">2.0</td><td style="padding: 2px;">2.5</td><td style="padding: 2px;">3.5</td><td style="padding: 2px;">5.0</td><td style="padding: 2px;">5.0</td><td style="padding: 2px;">7.5</td><td style="padding: 2px;">7.5</td><td style="padding: 2px;">10.0</td><td style="padding: 2px;">10.0</td><td style="padding: 2px;">10.0</td></tr> </table>				D	5	6.3	8	10	12.5	16	18	20	22	25	d	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0	1.0	F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	10.0
D	5	6.3	8	10	12.5	16	18	20	22	25																										
d	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0	1.0																										
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	10.0																										

**TABLE-1**

No	客户物料 编码 Customer Part No	永铭物 料编码 Ymin Part No	额定 电压 Rated Voltage (V.DC)	容量 Capacitance ( $\mu$ F)	浪涌 电压 Surge Voltage (V.DC)	使用温度 范围 Operating Temp.Range (°C)	容量范围 Capacitance Tolerance (%)	损耗 Tanδ (Max) (%)	阻抗 Impedance (Ω) Max at 25±2°C100kHz	最大纹波电流 (105°C100KHz) Max Ripple Current(mA) at 105°C100kHz	漏电流 Leakage Current ( $\mu$ A)(2mins )	尺寸 Dimensions(mm)					
												ΦD	L	α	d	F	
1		LKDK2502W101MF	450	100	500	-40~+105	-20~+20%	10	0.625	1375	460.0	8000	22	25	2.0	1.0	10.0
2																	
3																	
4																	
5																	
6																	

上海永铭电子股份有限公司

Shanghai Yongming Electronic Co.,Ltd.

铝电解电容器承认书  
Aluminum Electrolytic Capacitors  
Specification

商标



## 1 概述 SCOPE

本承认书规定了径向引线引出铝电解电容器的技术规范。

This specification covers miniature single-ended aluminum electrolytic capacitors.

## 2 参考标准 APPLICABLE SPECIFICATION

本承认书参考 JISC-5141 和 JISC-5102 制定。

This approval sheet consulted the institute of JISC-5141 and JISC-5102.

## 3 工作温度范围 OPERATING TEMPERATURE RANGE

工作温度范围是电容器在施加额定工作电压和额定纹波电流的条件下，可以长期可靠工作的环境温度范围。

-40~+105 °C (250~600V.DC) -

Operating temperature range is the range of ambient temperature at which the capacitors can be operated continuously at rated voltage.

-40~+105°C (250~600V.DC)

## 4 测试环境 CHARACTERISTICS

如果没有其他规定，标准的测试、检验环境条件如下所示：

环境温度：15~35°C

相对湿度：60~70%

大气压力：86kpa~106kpa

如果对测试结果有异议，可以在以下条件测试：环境温度：

20°C±1°C

相对湿度：60%~70%

大气压力：86kpa~106kpa

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows.

Ambient temperature : 15 to 35°C

Relative humidity : 60 to 70%

Air pressure : 86kpa to 106kpa

If there may be doubt on the results, measurements shall be made within the following limits

Ambient temperature : 20±1°C

Relative humidity : 60% to 67%


Air pressure : 86kpa to 106kpa

## 5.产品特性 PRODUCT CHARACTERISTICS


### 5.1 电气特性 ELECTRICAL CHARACTERISTICS

序号 NO	项目 Item	测试方法 Test method	性能 Performance
5.1.1	额定工作电压 Rated voltage		250~600 V.DC

名称 Name	版本 Version	03	承认书 Specification	页数 Page	4
			标准指南 Standard manual		

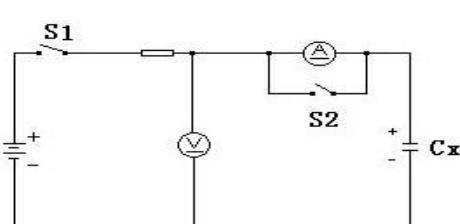5.1.2	电容量 Capacitance	测试频率: 120Hz±20% 测试电路: 串联等效电路 测试电压: 0.3Vrms Measuring frequency: 120Hz±20% Measuring circuit: Series equivalent circuit Measuring voltage: 0.3Vrms	标称容量 100~560uF -20%~+20% Range of Capacitance: 容量偏差: -20%~+20% Capacitance tolerance: -20%~+20%
5.1.3	损失角正切值 Dissipation Factor	测试条件与 5.1.2 电容量测试相同 Testing condition are the same as 5.1.2 for capacitance	见表 1 see table 1
5. .4	漏电流 Leakage current	在电容器两端施加额定工作电压，并串联 $1000\pm100\Omega$ 电阻，在施加电压 2 分钟后，测量漏电流。 测试电路如下图： The rated voltage shall be applied across the capacitors and its protective resistor which shall be $1000\pm100\Omega$ . The leakage current shall then be measured after an electrification period of 2 min.. Measurement circuit  Rs: 保护电阻 ( $1000\pm100\Omega$ ) Protective resistor( $1000\pm100\Omega$ ) ⎓: 直流电压表 ⎓: DC voltmeter Ⓐ: 直流电流表 Ⓐ: DC ammeter S <sub>1</sub> : 开关 S <sub>1</sub> :Switch S <sub>2</sub> : 电流表保护开关 S <sub>2</sub> :Protective switch for an ammeter	施加额定工作电压 2 分钟后 The leakage current shall then be measured after an electrification period of 2 min.. whichever is greater  250~600 V.DC $L_C \leq 0.01CV + 10$ L <sub>C</sub> : 漏电流(μA) C: 容量(μF) V: 额定工作电压 (V) L <sub>C</sub> : Leakage current(μA) C: Capacitance(μF) V: Rated voltage(V)

名称 Name	承认书 Specification	
版本 Version	页数 Page	5
标准指南 Standard manual		

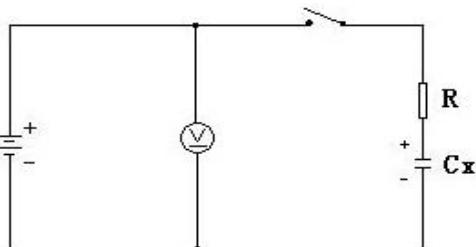5.1.5	<p>温度特性 Temperature Characteristic</p> <table border="1" data-bbox="389 325 976 534"> <thead> <tr> <th>阶段</th><th>温度</th><th>时间</th></tr> </thead> <tbody> <tr> <td>1</td><td><math>20 \pm 2^\circ\text{C}</math></td><td>--</td></tr> <tr> <td>2</td><td><math>-40 \pm 3^\circ\text{C}</math></td><td>2h</td></tr> <tr> <td>3</td><td><math>20 \pm 2^\circ\text{C}</math></td><td>15min.</td></tr> <tr> <td>4</td><td><math>105 \pm 0^\circ\text{C}</math></td><td>2h</td></tr> </tbody> </table> <p>阶段 1: 测量容量和阻抗 (<math> z  20^\circ\text{C} 120\text{Hz} \pm 20\%</math>) 阶段 2: 电容器恒温贮存 2 小时, 在热平衡状态测阻抗 (<math>-40^\circ\text{C} 120\text{Hz} \pm 20\%</math>) 阶段 4: 电容器恒温贮存 2 小时, 在热平衡状态测电容量 Step 1: Capacitance and impedance shall be measured. (<math> z  20^\circ\text{C} 120\text{Hz} \pm 20\%</math>) Step 2: After the capacitors being stored for 2 hours, impedance shall be made at thermal stability. (<math>-40^\circ\text{C} 120\text{Hz} \pm 20\%</math>) Step 4: After the capacitors being stored for 2 hours at <math>105^\circ\text{C}</math>, capacitance shall be measured. The measurement shall be made at thermal stability</p>	阶段	温度	时间	1	$20 \pm 2^\circ\text{C}$	--	2	$-40 \pm 3^\circ\text{C}$	2h	3	$20 \pm 2^\circ\text{C}$	15min.	4	$105 \pm 0^\circ\text{C}$	2h	<p>阶段 2: 阻抗值与阶段 1 阻抗值相比, 不大于表 2 要求。 阶段 4: 容量变化应在初值的 <math>\pm 20\%</math> 范围内 Step 2: Impedance value ratio to the value at step 1 shall be not more than the value given table-2 Step 4: Variation of capacitance Within <math>\pm 20\%</math> of the value at Step 1.</p>
阶段	温度	时间															
1	$20 \pm 2^\circ\text{C}$	--															
2	$-40 \pm 3^\circ\text{C}$	2h															
3	$20 \pm 2^\circ\text{C}$	15min.															
4	$105 \pm 0^\circ\text{C}$	2h															
5.1.6	<p>耐浪涌电压 Surge Test</p> <p>充电 <math>30 \pm 5</math> 秒, 放电 <math>5.5 \pm 0.5</math> 分钟作为一个周期, 共进行 1000 次。 测试温度: <math>15^\circ\text{C}-35^\circ\text{C}</math> 然后在标准大气条件下放置达到热稳定, 测试各参数 1000 times of charging for <math>30 \pm 5</math> sec., with a period of <math>5.5 \pm 0.5</math> min. Test temperature: <math>15^\circ\text{C}-35^\circ\text{C}</math> And the capacitors shall be stored under standard atmospheric conditions to obtain thermal stability, after which measurements shall be made. 测试回路 Test circuit</p> 	<p>容量: 在初始值的 <math>\pm 20\%</math> 以内。 损耗角正切值: 不大于规定值的 200%。 漏电流: 不大于规定值。 Capacitance: With <math>\pm 20\%</math> of the initial value Dissipation factor: Not more 200% of the specified value Leakage current: Not more than the specified value</p>															

名称 Name	承认书 Specification
版本 Version	页数 Page
标准指南 Standard manual	6

Instantaneous over voltage which may be applied to terminals of capacitors, therefore, not applicable to such over voltages as often applied.

## 浪涌电压设定

RV(V)	400	450	500	550	600	250		
S.V(V)	450	500	550	600	650	300		

## 5.2 机械特性 MECHANICAL PERFORMANCE

序号 NO	项目 Item	测试方法 Test method	特性 Perf rmance								
5.2.1	端子强度 TERMINAL STRENGTH	<p>端子抗拉强度: 沿电容器端子引线方向施加*1N 的拉力, <math>10\pm1</math> 秒。</p> <table border="1"> <tr> <td>引线 直径 <math>\Phi</math></td> <td>1.0</td> </tr> <tr> <td>拉力 N</td> <td>15</td> </tr> </table> <p>端子抗弯强度: 在电容器引线施加固定重力*1N, 然后, 将电容体弯折 <math>90^\circ</math>后回到原位, 再向相反方向弯折 <math>90^\circ</math>后回到原位。 上述过程在 5 秒内完成。</p> <table border="1"> <tr> <td>引线 直径 <math>\Phi</math></td> <td>1.0</td> </tr> <tr> <td>拉力 N</td> <td>10</td> </tr> </table> <p>Tensile strength of termination: A static load of 1N shall be applied to the terminal in the down-lead direction</p> <p>Bending strength of termination: A static load of 1N applied to the lead wire, then bent the body through <math>90^\circ</math>, return to the original position. Next bent it in opposite direction through <math>90^\circ</math>with the same speed, again return to the original position. Carry out this operation in about 5 sec.</p>	引线 直径 $\Phi$	1.0	拉力 N	15	引线 直径 $\Phi$	1.0	拉力 N	10	<p>测量电容器应无接触不良、开路或短路, 无可见机械损伤</p> <p>When the capacitors is measured, there shall be no intermittent contacts, or open or short-circuiting. There shall be no such mechanical damage.</p>
引线 直径 $\Phi$	1.0										
拉力 N	15										
引线 直径 $\Phi$	1.0										
拉力 N	10										
5.2.2	振动试验 Resistance to Vibration	<p>依据 JIS C 5102 8.2 和 JIS C 5025 试验。 在 3 个互相垂直的方向分别施加 2 小时振动, 共 6 小时</p> <p>To comply with JIS C 5102 8.2and JIS C 5025</p> <p>Direction and duration of vibration: 3 orthogonal directions mutually each for 2 hours, total 6 hours</p>	<p>测量电容器应无接触不良开路或短路, 无可见机械损伤。</p> <p>When the capacitors is measured there shall be no intermittent contacts, or open or short circuiting There shall be no such mechanical damage.</p>								
5.2.3	可焊性 Solder ability	<p>依据 IEC60068-2-2 进行试验</p> <p>焊锡温度: <math>250\pm5^\circ\text{C}</math></p> <p>浸入时间: <math>2.0\pm0.5</math> 秒</p> <p>To comply with IEC60068-2-2</p> <p>Temperature or solder: <math>250\pm5^\circ\text{C}</math></p> <p>Dipping time: <math>2\pm0.5\text{sec.}</math></p>	<p>浸入焊锡的引线表面积约 90%以上应附着新锡</p> <p>At least 90% of circumferential surface of the dipping portion of termination shall be covered with new solder.</p>								

名称 Name	承认书 Specification		
版本 Version	03	页数 Page	7
标准指南 Standard manual			



## 5.3 耐久性测试 ENDURANCE PERFORMANCE

序号 N	项目 Item	测试方法 Test method	特性 Performance		
5.3.1	耐焊接热 Resistance to soldering heat	<p>焊槽法: 焊锡温度: <math>260 \pm 5^\circ\text{C}</math> 浸入时间: <math>10 \pm 1</math> 秒 电路板 : 1.6mm</p> <p>Solder bath method Solder temperature : <math>260 \pm 5^\circ\text{C}</math> Immersion time : <math>10 \pm 1</math> sec. Printed wiring board: 1.6mm</p>	<p>容量变化: 在初始值 <math>\pm 10\%</math> 范围内 损失角正切值: 不大于规定值 漏电流: 满足 5.1.4 要求 外观: 无异状</p> <p>Variation of capacitance: Within <math>\pm 10\%</math> of the initial value before test.</p> <p>Dissipation factor: Not more than the specified value</p> <p>Leakage current: To satisfy No.5.1.4</p> <p>Appearance: No remarkable abnormality.</p>		
5.3.2	稳态湿热 Resistance to damp heat (steady state)	<p>依据 JIS C 5023 进行试验 试验温度: <math>40 \pm 2^\circ\text{C}</math> 试验时间: <math>240 \pm 8</math> h 相对湿度: 90~95%</p> <p>试验后, 电容器在标准大气条件下 1~2 小时, 然后测试参数 To comply with JIS C 5023 Test temperature : <math>40 \pm 2^\circ\text{C}</math> Test time : <math>240 \pm 8</math> h Relative humidity: 90~95%</p> <p>After completion of test, the capacitors shall be subjected to standard atmospheric conditions for 1 to 2 hours, after which measurements shall be made.</p>	<p>容量变化: 在初始值 <math>\pm 15\%</math> 范围内 损失角正切值: 不大于规定值% 漏电流: 满足 5.1.4 要求 外观: 无异状</p> <p>Variation of capacitance: Within <math>\pm 15\%</math> of the initial value before test.</p> <p>Dissipation factor: Not more than the specified value</p> <p>Leakage current: To meet requirement of No.5.1.4</p> <p>Appearance: No remarkable abnormality.</p>		
5.3.3	高温负荷试验 Load life test	<p>1 试验温度: <math>105 \pm 2^\circ\text{C}</math>, 施加含额定纹波电流的额定电压(所加电压峰值不超过), Apply rated voltage with rated ripple current.(the peak voltage shall not exceed the rated voltage) Test temperature: <math>105 \pm 2^\circ\text{C}</math></p> <p>2 产品置于常温 16 小时后测试, 测试温度 <math>25 \pm 2^\circ\text{C}</math>, 电容器的性能应满足如下要求</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>负荷寿命</td> <td>8000h</td> </tr> </table>	负荷寿命	8000h	<p>容量变化: 在初始值 <math>\pm 20\%</math> 范围内 损耗角正切值: 不超过规定值的 200% 漏电流: 在规定值以内 外观: 无异状</p> <p>Variation of capacitance: Within <math>\pm 20\%</math> of the initial value before test.</p> <p>Dissipation factor: Within 200% of the specified value</p> <p>Leakage current: Within the specified value</p> <p>Appearance: No remarkable abnormality.</p>
负荷寿命	8000h				

名称 Name	承认书 Specification		
版本 Version	03	页数 Page	8
标准指南 Standard manual			



5.3.4	高温贮存试验 Shelf life test	<p>在 <math>105\pm2^{\circ}\text{C}</math> 环境下无负荷贮存 1000 h, 至少恢复 16 小时。</p> <p>The capacitors are then stored with no voltage applied at a temperature of <math>105\pm2^{\circ}\text{C}</math> for 1000 hours and then resumed 16 hours.</p>	<p>容量变化率: 初始值 <math>\pm20\%</math> 范围内。 损耗角正切值: 不超过规定值的 200% 漏电流: 不超过规定值的 200% 外观: 无异状</p> <p>Variation of capacitance: Within <math>\pm20\%</math> of the initial value before test. Dissipation factor: Not more than 200% of the specified value Leakage current: Not more than 200% of the specified value Appearance: No remarkable abnormality.</p>
5.3.5	低温储存: Low temperature storage	<p>环境温度 <math>-40^{\circ}\text{C}\pm2^{\circ}\text{C}</math> ambient temperature <math>-40^{\circ}\text{C}\pm2^{\circ}\text{C}</math> 持续时间: 240 小时 Time: 240 Hours 恢复时间: 至少 16 小时 Recovery time: at least 16 hours</p>	<p>100Hz 下测试, 电容量变化率 <math>\Delta C/C \leq \pm20\%</math>; Test at 100HZ, capacitance change <math>\Delta C/C \leq \pm20\%</math>; 100Hz 下测试, 损耗 <math>\text{tg}\delta \leq</math> 规格值; Test at 100HZ, DF <math>\text{tg}\delta \leq</math> specified value 漏电流 <math>\leq</math> 规格值; Leakage current <math>\leq</math> specified value 试验后电容器无可见损伤和电解质漏出。 No visible damage and electrolytic leakage after testing capacitor.</p>
5.3.6	防爆试验 Safety vent	<p>在电容器两极施加直流反向电压 100V, 其中通过的电流设置应不大于 1A, 在测试时防爆装置应能在 30 分钟内动作。</p> <p>D. C. Application test The capacitors shall be subjected to a reverse D.C. 100 voltage equal to the rated D.C. voltage. The current flowing through the capacitors shall be limited to 1A. If the vent does operate with the voltage applied for 30 minutes, the test is considered to be passed.</p>	<p>上述过程中应无引线、铝箔等散射, 无火花产生。</p> <p>The vent device is actuated under the test conditions, thereby preventing terminals, metal pieces, etc, of the capacitors from scattering due to burst, the case from separating from the seal packing, or the capacitors from producing flame.</p>

名称	Name		承认书 Specification		
版本	Version	03	页数	Page	9
标准指南		Standard manual			



表 2 Table 2

阻抗比 Max. Impedance ratio (120HZ)	额定工作电压 Rstet voltage(v)  z -40°C/ z  20°C	400	450	500	550	600
		7	7	7	10	10

## 6. 标记 MARKING

6. 1 在电容器体上注明有如下内容：

- (1) 生产厂商商标
- (2) 工作电压
- (3) 型号规格
- (4) 负极标志
- (5) 额定温度
- (6) 生产周期 A13(13表示年份, A表示月份; A~M 表示: 1月~11月, I除外)

The following items shall be marked indelibly on the capacitors.

- (1) Manufacture's name or trade mark.
- (2) Rated voltage
- (3) Type and specification
- (4) Polarity of the terminals
- (5) Rated temperature
- (6) Manufacture time A13(13 that year, A said that the month , A ~ M said: January ~ December ,except I)

### 6.2 标记颜色

套管颜色： 黑色

Marking color

Sleeve color : Black

名称 Name	承认书 Specification	
版本 Version	页数 Page	10
	标准指南 Standard manual	

上海永铭电子股份有限公司

Shanghai Yongming Electronic Co.,Ltd.

铝电解电容器承认书  
Aluminum Electrolytic Capacitors  
Specification

商标



## 7. 纹波电流补偿系数 Ripple Current Correction Factor

### 7.1 频率修正系数 Frequency correction factor

频率 (Hz) Frequency (Hz)	50	120	1K	10K~50K	100K
修正因子 Correction Factor	0.40	0.50	0.80	0.90	1.00

### 7.2 温度修正系数 Temperature correction factor

环境温度 (°C) Environment temperature	50	70	85	105
修正因子 Correction Factor	2.	1.8	1.4	1.0

## 8. 包装 PACKING

### 8.1 包装标签 PACKING LABEL

内标签样本 inner label sample

外箱标签样本 outer label sample



包装标签内容 Packing Label Marked (the following items shall be marked on the label)

(Inside box or bag、outer box)

1) 产品名称 Product name

2) 生产批号 Lot No

3) 数量 quantity

4) 生产日期 Production date

5) 产品编号 Part No

6) 客户物料描述 Customer item code

### 8.2 批号 Lot number:

<input type="text" value="1"/>	<input type="text" value="2"/>	<input type="text" value="3"/>	<input type="text" value="4"/>	<input type="text" value="5"/>	<input type="text" value="6"/>	<input type="text" value="7"/>	<input type="text" value="8"/>	<input type="text" value="9"/>	<input type="text" value="10"/>	<input type="text" value="11"/>	<input type="text" value="12"/>	<input type="text" value="13"/>
商标	年	月	材料标识			生产序号				分箱号		
YM	year	moth	material code			production number				serial number		

名称 Name	承认书 Specification		
版本 Version	03	页数 Page	11
标准指南 Standard manual			

## 8.3 散包装按下图包装方式 Bulk Packing



内包装盒 Box



外包装箱 Carton


## 9. 切脚、成型 Lead cutting and forming

切脚、成型标准 Standard for lead cutting

该标准是用于引线切脚，技术要求，判断和验收。


This standard is used for lead cutting, technology, requirement, judgment and acceptance inspection, and etc.

引线切脚 A 图

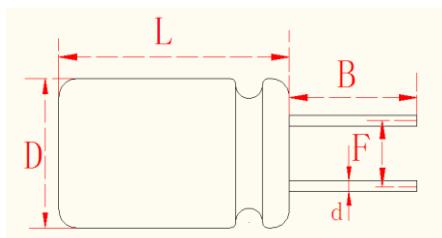

D	20	22	25	公差
B	3.5~10			±0.5
d	1.0			±0.05
F	10			±0.5

引线切脚 F 图 (成型折弯 90°)

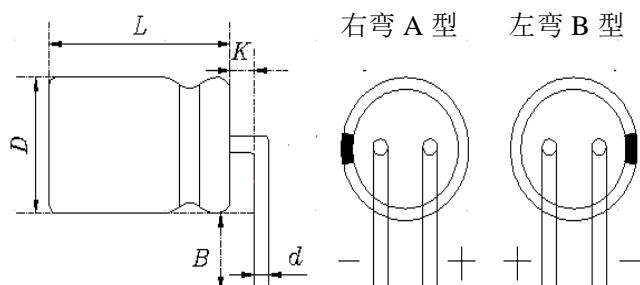


D	Φ 20~Φ 25	公差
K	2.5	±0.5
B	3.0~10	±0.5
类型	右弯 A 型/左弯 B 型	/

名称	Name	承认书 Specification	
版本	Version	页数	Page
标准指南 Standard manual			12

## 10. 产品编码规则

## Product Code Rules

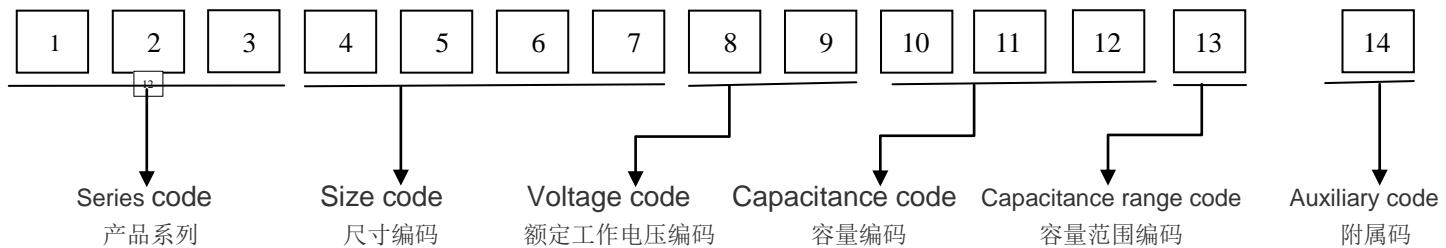

产品系列		额定工作电压		静电容量				容量范围		附属码	
系列	编码	电压	编码	容量	编码	容量	编码	级别	编码	附属码（国内）	附属码（IND）
LMM	LMM	4V	0G	0.1 μF	0R1	33 μF	330	±20%	M	O 引线 30F/35F	2 引线 30F/35F
L3M	L3M	6.3V	0J	0.22 μF	R22	47 μF	470	±10%	K	H 引线 33F/38F	3 引线 33F/38F
L4M	L4M	7.5V	0L	0.33 μF	R33	56 μF	560	0~+10%	R	F 引线 22F/27F	4 切直脚 A 图
LK7	LK7	10V	1A	0.47 μF	R47	68 μF	680	0~-10%	T	A 切直脚 A 图	5 切脚成型 B 图
LK	OLK	16V	1C	0.68 μF	R68	82 μF	820	-10~+20%	V	B 切脚成型 B 图	6 切脚成型 C 图
LKF	LKF	20V	1D	0.82 μF	R82	100 μF	101	-20~+5%	L	C 切脚成型 C 图	7 切脚成型 D 图
LKG	LKG	25V	1E	1.0 μF	1R0	120 μF	121	-10~+5%	G	D 切脚成型 D 图	8 切脚成型 E 图
LKL	LKL	30V	1P	1.2 μF	1R2	150 μF	151	-10~+15%	H	E 切脚成型 E 图	9 引线 22F/27F
LLK	LLK	35V	1V	1.5 μF	1R5	180 μF	181	0~+40%	I	Q 切脚折弯 90° F 图 A型(右)	M 编带 A 图
GP	OGP	40V	1G	1.8 μF	1R8	220 μF	221	±15%	J	P 切脚折弯 90° F 图 B型(左)	N 编带 B 图
LKM	LKM	50V	1H	2.2 μF	2R2	270 μF	271	-20~+50%	A	X 切脚成型 G 图	
LKZ	LKZ	63V	1J	2.7 μF	2R7	330 μF	331	-5~20%	B	g 切脚双折弯 90° F 图 A 型(右)	
KC	OKC	80V	1K	2.8 μF	2R8	470 μF	471	-5~+20%	E	f 切脚双折弯 90° F 图 B 型(左)	
KCX	KCX	100V	2A	3.0 μF	3R0	560 μF	561	-15~+5%	C	K 编带 A 图	
PKC	PKC	120V	2K	3.3 μF	3R3	680 μF	681	-15~-5%	D	J 编带 B 图	
LKJ	LKJ	160V	2C	3.6 μF	3R6	820 μF	821	0~+20%	F	V 液态 SMD	
LKX	LKX	200V	2D	3.9 μF	3R9	1000 μF	102	0~+15%	N	CG 车规	
LKD	LKD	250V	2E	4.0 μF	4R0	1200 μF	122	-5~+15%	W		
		350V	2V	4.7 μF	4R7	1500 μF	152	-20~+0%	S		
		400V	2G	5.6 μF	5R6	1800 μF	182	-20~+10%	P		
		450V	2W	6.0 μF	6R0	2200 μF	222	0~+5%	Q		
		480V	2L	6.2 μF	6R2	2700 μF	272				
		500V	2H	6.8 μF	6R8	3300 μF	332				
		550V	2I	8.2 μF	8R2	3900 μF	392				
		600V	2J	10 μF	100	4700 μF	472				
				12 μF	120	5600 μF	562				
				13 μF	130	6800 μF	682				
				15 μF	150	8200 μF	822				
				18 μF	180	10000 μF	103				
				22 μF	220	22000 μF	223				
				27 μF	270	33000 μF	333				

名称	Name		承认书			Specification	
版本	Version	03				页数	Page
			标准指南		Standard manual	13	

上海永铭电子股份有限公司

Shanghai Yongming Electronic Co.,Ltd.

铝电解电容器承认书  
Aluminum Electrolytic Capacitors  
Specification

商标



外形尺寸					
产品直径	编码	产品高度	编码	产品高度	编码
3.5	F	3.55	035	15	150
4	A	3.95	039	16	160
4.5	G	4.5	045	16.5	165
5	B	5	050	17	170
5.5	H	5.4	054	18	180
6.3	C	5.8	058	19	190
8	D	6.5	065	20	200
10	E	7	070	21	210
12.5	L	7.7	077	22	220
16	I	8	080	23	230
18	J	8.5	085	25	250
20	N	9	090	28	280
22	K	9.5	095	30	300
25	M	10	100	31.5	315
30	P	10.5	105	32	320
35	Q	11	110	35.5	355
40	R	11.5	115	36	360
		12	120	40	400
		12.5	125	41.5	415
		13	130	45	450
		13.5	135	50	500
		14	140		
		14.5	145		

名称	Name	承认书 Specification		
版本	Version	03	页数	Page
			14	
		标准指南	Standard manual	



## 11. 其他 The others

## 11.1 铝电解电容器的应用上的重要信息

Important information on the application of aluminum electrolytic capacitors

## 11.1.1. 电解电容是有极性的 DC electrolytic capacitors are polarized

当施加反向直流电压时，电容器将变为短路，电路中使用没有极化电容会被损坏，因为可施加到正电压的阴极端子的电路中流过异常电流。 When reverse voltage is applied on DC electrolytic capacitors, the capacitors will becomes short-circuited please use no polarized capacitors in the circuit be damage due to abnormal current flows through the capacitors since the circuit where the positive voltage may be applied to the cathode terminal.

## 11.1.2. 使用电容器额定电压 Use capacitors within rated voltage

当电容器用比额定电压更高的电压时，漏电流增加，特性显着恶化，并在很短的时间内发生损坏的结果。请特别小心的峰值电压不应超过额定电压。 When capacitors is used at higher voltage than the rated voltage, leakage current increases, characteristics drastically deteriorate and damage in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage.

## 11.1.3. 充电和放电应用 Charge and discharge application.

当铝电解电容器用于快速充电和放电的应用，其寿命可缩短减少，热量上升，等等。

When aluminum electrolytic capacitors for general purpose are employed in rapid charge and discharge application, its life expectancy may be shortened by capacitance decrease, heat rise, etc.

## 11.1.4. 存储电容器 Store the capacitors.

在已经存储了长时间的铝电容器其漏电流上升是常见的。存储温度越高，漏电流增大，因此，请采取预防措施，如存储位置。有电压被施加到电容器上时其漏电流逐渐减小。漏电流增加，会造成问题，因此，使用前在电路中施加电压（老化）。 Increased leakage current is common in aluminum capacitors which have been stored for long period of time. The Higher the storage temperature, the higher the leakage current increase,

therefore please take precautions concerning the storage location. The leakage current decreases gradually as voltage are applied to the capacitor. In cases where increased leakage current causes problems in the circuit, apply voltage (aging) before using.

## 11.1.5 适用于电容器的纹波电流不应超过额定的值

Ripple current applied to capacitors should not exceed the rated value.

如果纹波电流超过指定值，过多的热量会减少容量和缩短电容寿命。因此纹波电压的峰值应该小于额定电压。

名称	Name	承认书 Specification		
版本	Version	03	页数	Page
		标准指南	Standard manual	15



Excessive heat will reduce capacitance and result in shortened life of capacitor if ripple currents exceeding the specified rated value are applied. The peak value of the ripple voltage should be less than the rated voltage.

#### 11.1.6. 环境温度 Ambient temperature.

铝电解电容器的寿命受环境温度的影响。人们普遍表示，温度每下降 10°C 寿命加倍。Life of the aluminum electrolytic capacitor is affected by the ambient temperature. It is generally stated, that life doubles for each 10°C decrease in temperature.

#### 11.1.7. 引线的强度 Intensity of lead

加到引线或端子，应力的内部连接。这可能会导致短路，开路或漏电流增加。在电容器已被焊接到PC板上后，弯曲或后处理电容器是不可取的。

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections. This may result in short circuit, open circuit or increased leakage current. It is not

#### 11.1.8 在焊接过程中的耐热性 Heat resistance at the soldering process

在PC板上安装铝电解电容器的浸焊工艺中，观察到PET外套二次收缩或开裂时，焊料的温度太高或浸渍时间太长。advisable to bend or handle a capacitors after it has been soldered to the PC board.

In the dip soldering process of PC board with aluminum electrolytic capacitors mounted, secondary shrinkage or crack of PET sleeve may be observed when solder temperature is too high or dipping time is too long.

#### 11.1.9. PC 板的孔间距和位置 Hole pitch and position of PC board.

设计印刷电路板，其孔距适合指定的目录或规格的电容的引线间距（铅的间距）。当电容器强行插入一个孔间距时，把应力加在引线。这可能会导致短路或漏电流增加。

capacitor specified by the catalog or specifications. When a capacitor is forcibly inserted into an unmatched hole A PC board must be designed so its hole pitch coincides with the lead pitch (lead spacing) of the pitch, a stress is put on the leads. This could result in a short circuit or increased leakage current.

#### 11.2 该产品是无铅和环保 This product is lead free and environmental friendly. (SHAMLP2025931105, SGS)

产品按照 ROHS 的标准，六种有害物质最大不超过下列要求：This products according to the standard of ROHS,it means the max capacitance Of six harmful material not over the following request:

Cd -100PPM	Pb -1000PPM	Hg -1000PPM
Cr+-1000PPM	PBBs -1000PPM	PBDEs -1000PPM

名称	Name	承认书 Specification		
版本	Version	03	页数	Page
		标准指南	Standard manual	16

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Ymin manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [1814181](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)  
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)  
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#)  
[UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-](#)  
[A1CF471](#) [EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)  
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)  
[TER330M50GM](#) [477KXM035MGBWSA](#)