

Features

- Small plastic package suitable
- for surface mounted design
- High reliability with high surge current handling capability

Applications

• High speed switching

MARKING:A


Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit V	
Peak Reverse Voltage	V _{RM}	90		
Reverse Voltage	V _R	V _R 80		
Average Rectified Forward Current	I _{F(AV)}	100	mA	
Peak Forward Current	I _{FM}	225	mA	
Surge Forward Current (1 s)	I _{FSM}	500	mA	
Junction Temperature	Tj	150	°C	
Storage Temperature Range	T _{stg}	- 55 to + 150	°C	

Electrical Characteristics (T_a = 25 °C)


Parameter	Symbol	Max.	Unit	
Forward Voltage at I _F = 100 mA	V _F	1.2	V	
Reverse Current at V _R = 80 V	I _R	0.1	μA	
Capacitance between Terminals at $V_R = 0.5 V$, f = 1 MHz	Ст	3	pF	
Reverse Recovery Time at V_R = 6 V, I_F = 10 mA, R_L = 100 Ω	t _{rr}	4	ns	


PINNING







Typical Characteristics

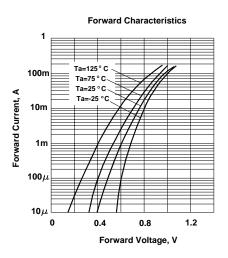


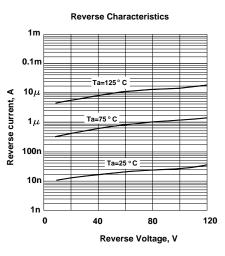


Capacitance between terminals characteristics








Reverse Recovery Time Characteristics



Reverse Recovery Time Measurement Circuit

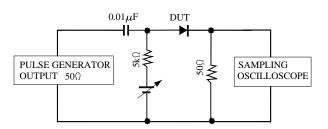





PACKAGE OUTLINE


Plastic surface mounted package; 2 leads





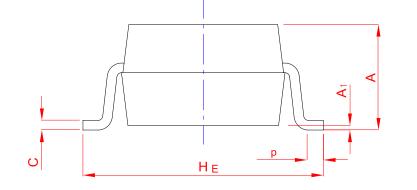



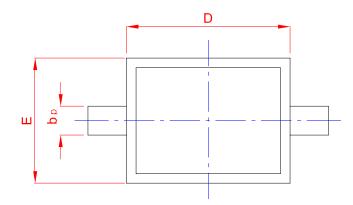

UNIT	А	bp	С	D	Е	ΗE	A1	Lp
mm	1.20	0.40	0.15	1.80	1.35	2.80	0.10	0.50
	0.90	0.25	0.10	1.60	1.15	2.30	0.01	0.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Yongyutai Electronics manufacturer:

Other Similar products are found below :

MCL4151-TR3 MMBD3004S-13-F RD0306T-H BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 JAN1N4153-1 JAN1N4454-1 JAN1N4454UR-1 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 1N4454-TR BAV199E6433HTMA1 BAV70HDW-7 BAS28-7 JANTX1N6640 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G 1SS388-TP RGP30D-E3/73 VS-8EWF02S-M3