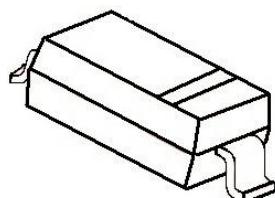


SOD-323



MARKING: A6

SOD-323 贴片塑封二极管 250mW SOD-323 Fast Switching Diode

特征 Features

- 开关速度小于 4.0nS; Fast Switching Device (TRR <4.0 nS)
- 最大功率耗散 250mW; Power Dissipation of 250mW
- 高稳定性和可靠性。High Stability and High Reliability
- 反向漏电流小。Low reverse leakage

机械数据 Mechanical Data

- 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性($TA = 25^{\circ}\text{C}$ 除非另有规定)

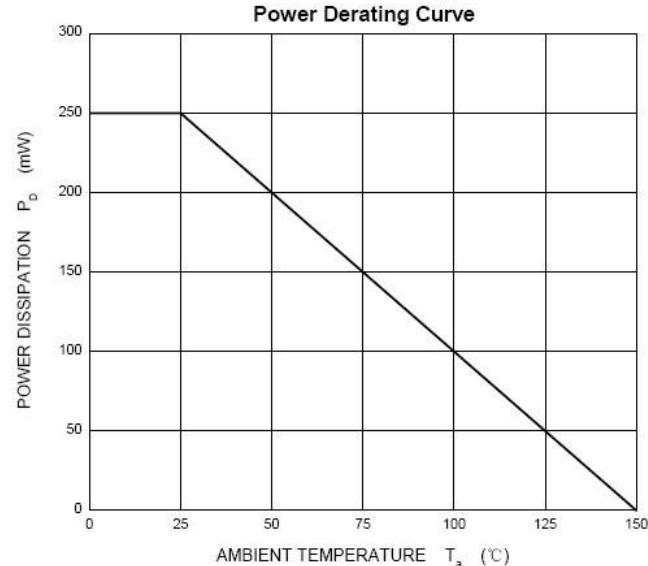
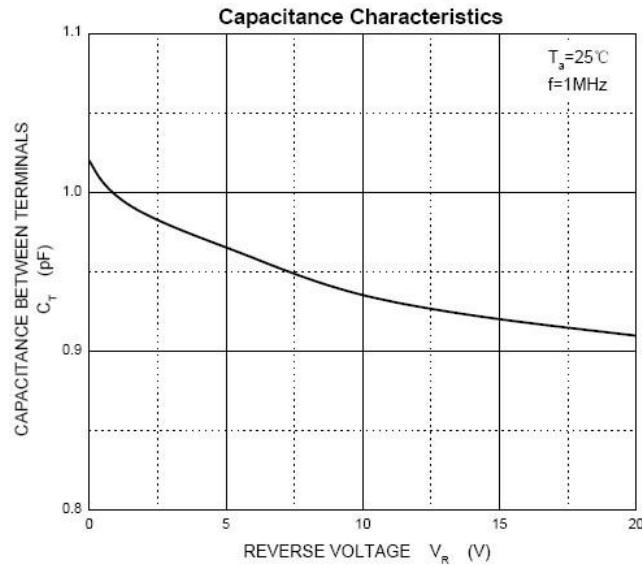
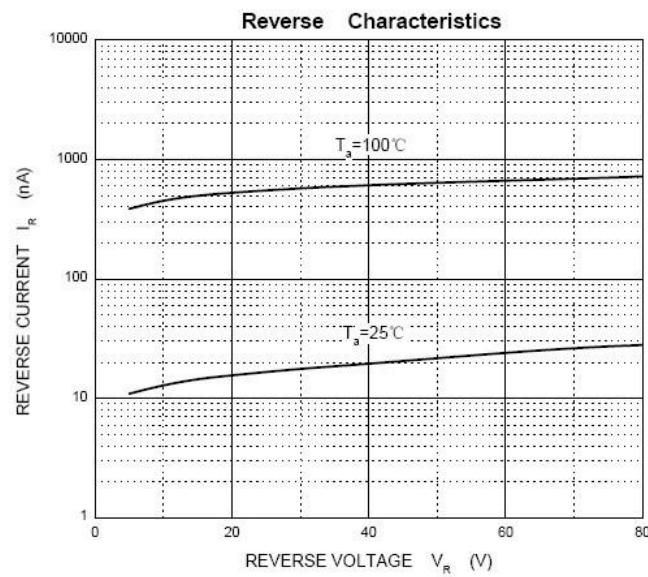
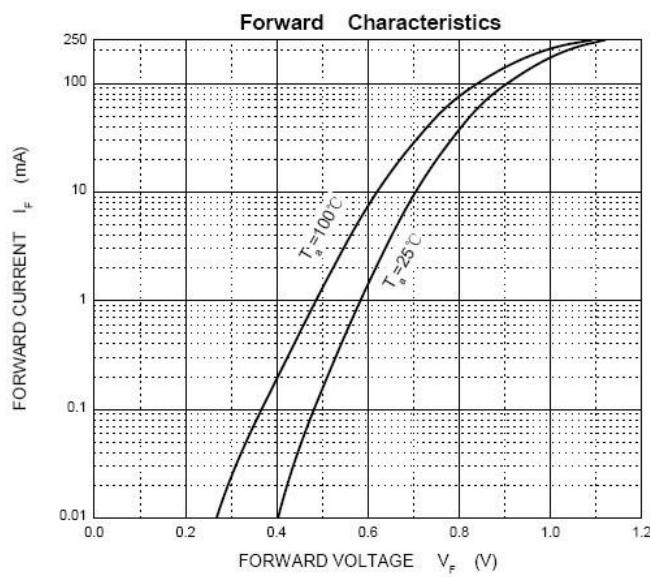
Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
反向电压 Reverse Voltage	V_R	100	V
反向峰值电压 Peak Repetitive Reverse Voltage	V_{RRM}	100	V
功率消耗 Power Dissipation	P_d	250	mW
工作结温 Operating junction temperature	T_j	150	$^{\circ}\text{C}$
存储温度 Storage temperature range	T_s	-55~+150	$^{\circ}\text{C}$
热阻抗 Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	500	$^{\circ}\text{C}/\text{W}$
平均整流电流 Average Rectified Current	I_o	250	mA
正向(不重复)浪涌电流 Non repetitive Peak Forward Surge Current @ $t_p=8.3\text{ms}; TA=25^{\circ}\text{C}$	I_{FSM}	2.0	A

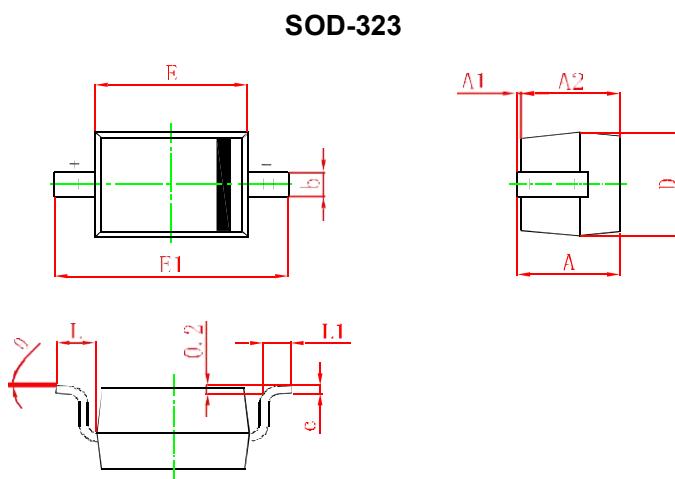
Valid provided that electrodes are kept at ambient temperature.

电特性 Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

符号 Symbols	参数 Parameter	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
$V(BR)$	反向电压 Reverse Voltage	$IR=100\mu\text{A}$	100		V
IR	反向漏电流 Reverse Leakage Current	$VR=25\text{V}$	---	30	nA
		$VR=75$	---	1	μA
VF	正向电压 Forward Voltage	$IF=1.0\text{mA}$	---	0.715	V
		$IF=10\text{mA}$	---	0.855	
		$IF=50\text{mA}$	---	1.00	
		$IF=150\text{mA}$	---	1.25	
TRR	反向恢复时间 Reverse Recovery Time	$IF= IR=10\text{mA}$	---	4	nS
		$RL=100\Omega$			
		$IRR=0.1 \times IR$			
CT	结电容 Capacitance	$VR=0\text{V}, f=1\text{MHz}$	---	1.5	pF

Typical Characteristics

SOD-323 PACKAGE OUTLINE

Plastic surface mounted package



Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Yongytai Electronics manufacturer:

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4153-1](#)
[JAN1N4454-1](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#)
[1N4454-TR](#) [BAV199E6433HTMA1](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#)
[NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#)