



## FEATURES


- ◆ Extremely Fast Switching Speed




BAT54  
MARKING : KL1



BAT54A  
MARKING : KL2



BAT54C  
MARKING : KL3



BAT54S  
MARKING : KL4


## Maximum Ratings @ $T_A=25^\circ\text{C}$

| Parameter   | Symbol                       | Limits  |  |  | Unit |
|---|------------------------------|---------|--|--|------|
| Peak Repetitive Peak reverse voltage<br>Working Peak Reverse Voltage DC<br>Blocking Voltage | $V_{RRM}$ $V_{RWM}$<br>$V_R$ | 30      |  |  | V    |
| Forward Continuous Current  | $I_{FM}$                     | 200     |  |  | mA   |
| Power Dissipation   | $P_D$                        | 200     |  |  | mW   |
| Storage temperature   | $T_{STG}$                    | -55-150 |  |  | °C   |

## Electrical Characteristics @ $T_A=25^\circ\text{C}$


| Parameter                 | Symbol      | Min. | Typ. | Max. | Unit          | Conditions  |
|---------------------------|-------------|------|------|------|---------------|---|
| Reverse Breakdown Voltage | $V_{(BR)R}$ | 30   |      |      | V             | $I_R=100\mu\text{A}$  |
| Forward voltage           | $V_{F1}$    |      |      | 0.24 | V             | $I_F=0.1\text{mA}$  |
|                           | $V_{F2}$    |      |      | 0.32 | V             | $I_F=1\text{mA}$  |
|                           | $V_{F3}$    |      |      | 0.40 | V             | $I_F=10\text{mA}$   |
|                           | $V_{F4}$    |      |      | 0.50 | V             | $I_F=30\text{mA}$   |
|                           | $V_{F5}$    |      |      | 1    | V             | $I_F=100\text{mA}$  |
| Reverse current           | $I_R$       |      |      | 2    | $\mu\text{A}$ | $V_R=25\text{V}$  |
| Diode Capacitance         | $C_D$       |      |      | 10   | pF            | $V_R=1\text{V}, f=1\text{MHz}$                                  |
| Reverse Recovery Time     | $t_{rr}$    |      |      | 5    | nS            | $I_F=I_R=10\text{mA}$<br>$I_{rr}=0.1 \times I_R, R_L=100\Omega$ |

## Typical Characteristics

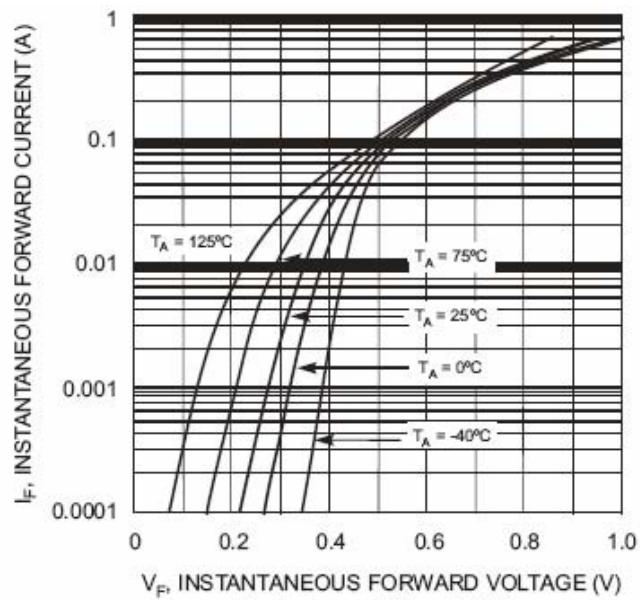


$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)

Fig. 1 Forward Characteristics

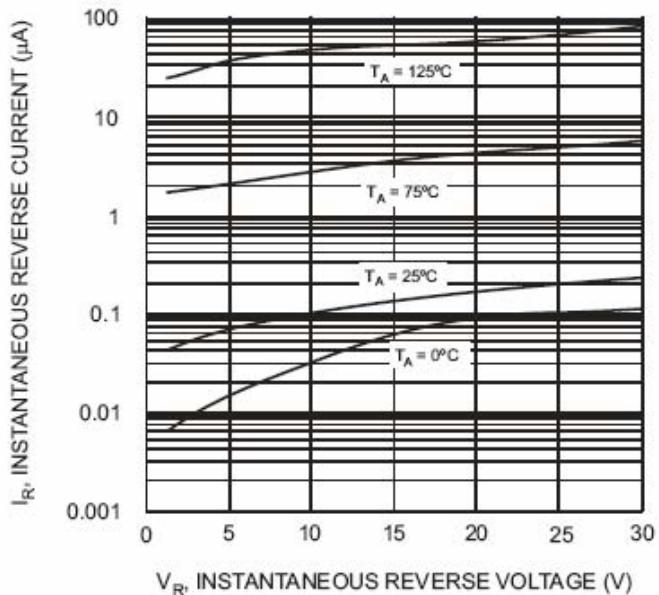


$V_R$ , INSTANTANEOUS REVERSE VOLTAGE (V)

Fig. 2 Typical Reverse Characteristics

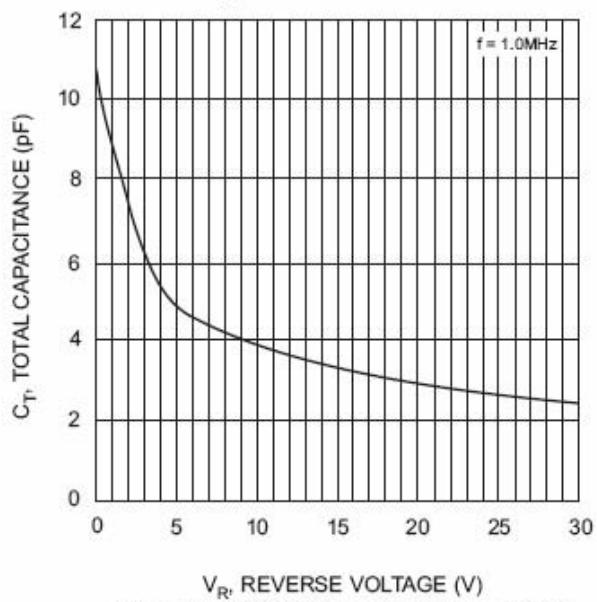

$V_R$ , REVERSE VOLTAGE (V)

Fig. 3 Typical Capacitance vs. Reverse Voltage

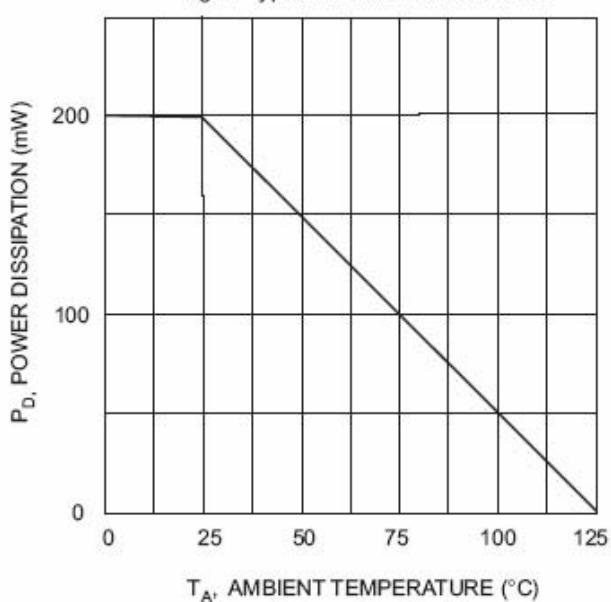

$T_A$ , AMBIENT TEMPERATURE (°C)

Fig. 4 Power Derating Curve

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Yongutai Electronics manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#)  
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#)  
[NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#)  
[SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)  
[MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)