


DF005S thru DF10S

表面安装桥式整流二极管
 反向电压 50 --- 1000 V
 正向电流 1.0A

Surface Mount Bridge Rectifiers
 Reverse Voltage 50 to 1000 V
 Forward Current 1.0 A

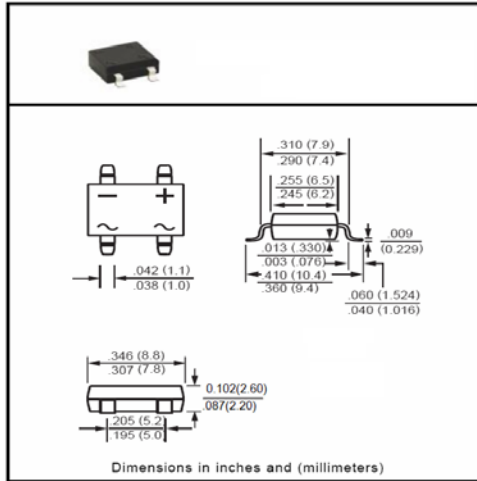

特征 Features

- 玻璃钝化芯片 Glass passivated chip junction
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 260°C/10秒 High temperature soldering guaranteed: 260/10seconds at terminals
- 引线 and 管体皆符合RoHS标准。 Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	DF005S	DF01S	DF02S	DF04S	DF06S	DF08S	DF10S	Unit
最大反向峰值电压 Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
最大反向有效值电压 Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	1							A
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	50							A
最大反向峰值电流 @ $T_A = 75^\circ\text{C}$ Maximum peak reverse current full cycle	$I_{R(AV)}$	30							μA
典型热阻 Typical thermal resistance	$R_{\theta JA}$	40							$^\circ\text{C}/\text{W}$
工作结温和存储温度 Operating junction and storage temperature range	T_J, T_{STG}	-50---+150							$^\circ\text{C}$

电特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


	Symbols	DF005S	DF01S	DF02S	DF04S	DF06S	DF08S	DF10S	Unit
最大正向电压 $I_F = 1.0\text{A}$ Maximum forward voltage	V_F	1.1							V
最大反向漏电流 $T_A = 25^\circ\text{C}$ Maximum reverse current $T_A = 125^\circ\text{C}$	I_R	5.0 500							μA
典型结电容 $V_R = 4.0\text{V}, f = 1\text{MHz}$ Type junction capacitance	C_J	13							pF

Notes: (1) On glass epoxy P.C.B. mounted on $0.05 \times 0.05''$ (1.3 x 1.3 mm) pads
 (2) On aluminum substrate P.C.B. with an area of $0.8'' \times 0.8''$ (20 x 20 mm) mounted on $0.05 \times 0.05''$ (1.3 x 1.3 mm) solder pad


DF005S thru DF10S

特性曲线 ($T_A = 25^\circ\text{C}$ 除非另有规定)


RATINGS AND CHARACTERISTICS CURVES ($T_A = 25^\circ\text{C}$ unless otherwise noted)

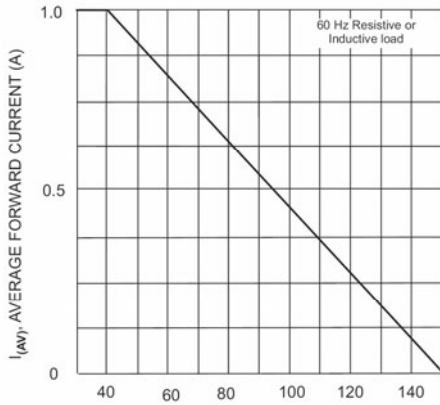


T_A : AMBIENT TEMPERATURE (°C)
 Fig. 1 Output Current Derating Curve

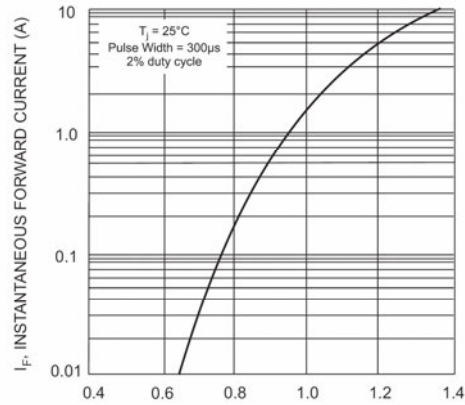


V_F : INSTANTANEOUS FORWARD VOLTAGE (V)
 Fig. 2 Typ Forward Characteristics (per element)

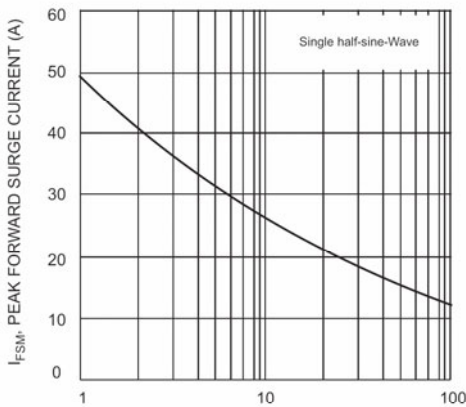

NUMBER OF CYCLES AT 60 Hz
 Fig. 3 Max Non-Repetitive Peak Forward Surge Current

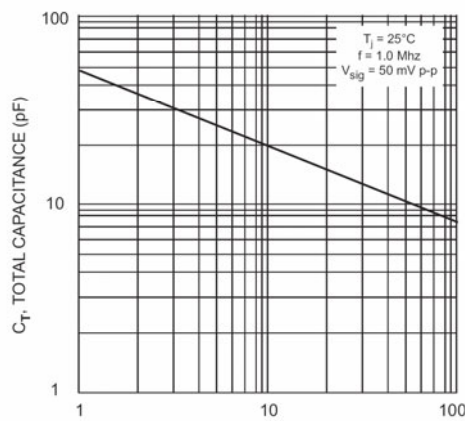

V_R : REVERSE VOLTAGE (V)
 Fig. 4 Typical Total Capacitance (per element)

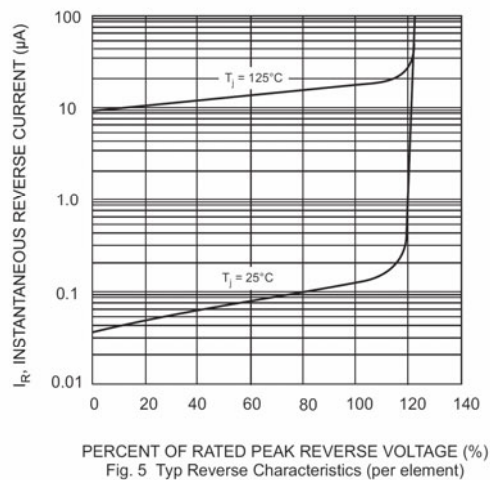

PERCENT OF RATED PEAK REVERSE VOLTAGE (%)
 Fig. 5 Typ Reverse Characteristics (per element)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Yongyutai Electronics](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#)
[KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [TB102M](#) [MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#)
[MP501W-BP](#) [MP502-BP](#) [KBPC25-02](#) [VBO160-12NO7](#) [VS-110MT120KPBF](#) [VS-60MT80KPBF](#) [DB105-BP](#) [DF1510S](#) [VS-](#)
[40MT160PAPBF](#) [GBU4G-BP](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [D3SB60](#) [TB354](#) [GBJ2504-BP](#) [26MB100A](#) [B1S-G](#) [VS-40MT160KPBF](#)
[VUO162-16NO7](#) [ABS10-G](#) [GBU6B-BP](#) [GBJ1508-BP](#) [BR5010-G](#) [ABS6-G](#) [B125C800G-E4/51](#) [MSB15MH-13](#)