


<p style="text-align: center;">SOD-123FL</p> <p style="text-align: center;">Dimensions in millimeters</p>	<p style="text-align: center;">FEATURES</p> <ul style="list-style-type: none"> ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 ◆ Metal silicon junction, majority carrier conduction ◆ Low power loss, high efficiency ◆ High forward surge current capability ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension 											
<p style="text-align: center;">MECHANICAL DATA</p> <p>Case: JEDEC SOD-123FL molded plastic body Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026 Polarity: Color band denotes cathode end Mounting Position: Any Weight: 0.0007 ounce, 0.02 grams</p>												
<p style="text-align: center;">MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p>												
<p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.</p>												
<p>Catalog Number</p>	<p>SYMBOLS</p>	<p>DSS32 K32</p>	<p>DSS33 K33</p>	<p>DSS34 K34</p>	<p>DSS35 K35</p>	<p>DSS36 K36</p>	<p>DSS37 K37</p>	<p>DSS38 K38</p>	<p>DSS39 K39</p>	<p>DSS310 K310</p>	<p>UNITS</p>	
<p>Maximum repetitive peak reverse voltage</p>	<p>V_{RRM}</p>	<p>20</p>	<p>30</p>	<p>40</p>	<p>50</p>	<p>60</p>	<p>70</p>	<p>80</p>	<p>90</p>	<p>100</p>	<p>VOLTS</p>	
<p>Maximum RMS voltage</p>	<p>V_{RMS}</p>	<p>14</p>	<p>21</p>	<p>28</p>	<p>35</p>	<p>42</p>	<p>49</p>	<p>56</p>	<p>63</p>	<p>70</p>	<p>VOLTS</p>	
<p>Maximum DC blocking voltage</p>	<p>V_{DC}</p>	<p>20</p>	<p>30</p>	<p>40</p>	<p>50</p>	<p>60</p>	<p>70</p>	<p>80</p>	<p>90</p>	<p>100</p>	<p>VOLTS</p>	
<p>Maximum average forward rectified current</p>	<p>$I_{(AV)}$</p>	<p style="text-align: center;">3.0</p>									<p>Amp</p>	
<p>Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)</p>	<p>I_{FSM}</p>	<p style="text-align: center;">80.0</p>									<p>Amps</p>	
<p>Maximum instantaneous forward voltage at 3.0A</p>	<p>V_F</p>	<p>0.52</p>	<p>0.55</p>	<p style="text-align: center;">0.70</p>			<p style="text-align: center;">0.85</p>			<p>Volts</p>		
<p>Maximum DC reverse current at rated DC blocking voltage</p>	<p>I_R</p>	<p style="text-align: center;">0.5</p>					<p style="text-align: center;">10.0</p>					<p>mA</p>
<p>Operating junction temperature range</p>	<p>T_J</p>	<p style="text-align: center;">-50 to +125</p>					<p style="text-align: center;">-50 to +150</p>					<p>°C</p>
<p>Storage temperature range</p>	<p>T_{STG}</p>	<p style="text-align: center;">-50 to +150</p>										<p>°C</p>

RATINGS AND CHARACTERISTIC CURVES

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

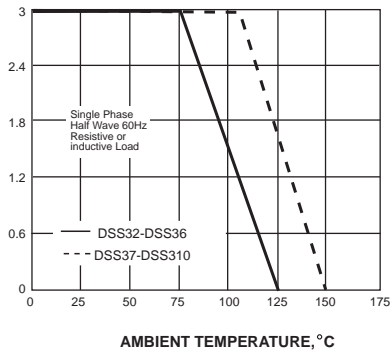

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

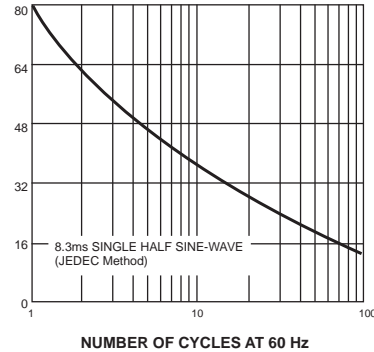


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


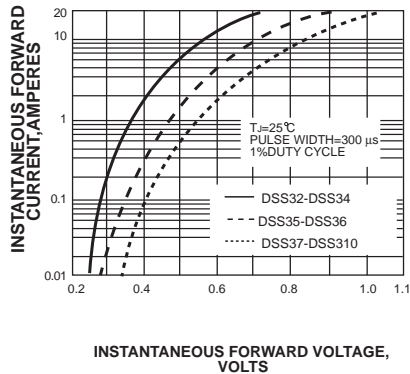


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

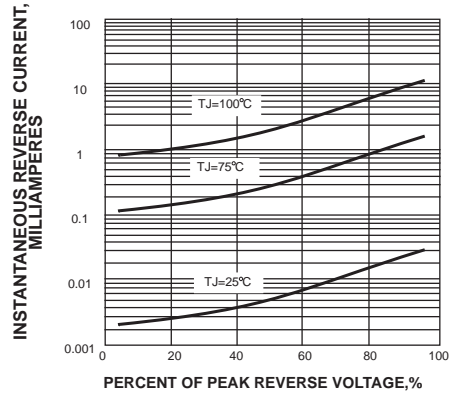

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Yongyutai Electronics](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#)

[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#)

[NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#)

[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#) [SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#)

[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#)

[ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#)

[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)