


Features

- ◆ Surface Mount Devices
- ◆ Standard 4532mm(1812mils) footprint
- ◆ Surface mount packaging for automated assembly
- ◆ Compatible with Pb and Pb-free solder Re flow profiles.
- ◆ UL(E352136), C-UL(E352136), TUV(R50322001)
- ◆ RoHS, Reach, HF compliance

Applications

- ◆ Over current and over temperature protection of automotive electronics
- ◆ PC motherboards, Hard disk driver, and PC peripherals
- ◆ POS Equipment
- ◆ USB port protection
- ◆ HDMI source protection

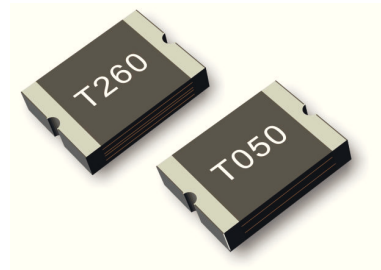

电气特性：

P/N	保持电流	跳脱电流	最大电压	最大电流	最大动作时间		消耗功率	电阻范围 (Ω)	
	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	(A)	(Sec.)	Pd_{typ} (W)	R_{min}	$R1_{max}$
K1812L010DR	0.10	0.30	60	10	0.5	1.50	0.8	0.700	15.00
K1812L014DR	0.14	0.34	60	10	1.5	0.15	0.8	0.400	6.50
K1812L020DR	0.20	0.40	30	10	8.0	0.20	0.8	0.750	5.00
K1812L020/60DR	0.20	0.40	60	10	1.5	0.15	0.8	0.400	6.000
K1812L030DR	0.30	0.60	30	10	8.0	0.10	0.8	0.300	3.000
K1812L035PR	0.35	0.70	16	40	8.0	0.10	0.8	0.200	1.800
K1812L050PR	0.50	1.00	15	40	8.0	0.15	0.8	0.150	1.000
K1812L075PR	0.75	1.50	16	40	8.0	0.20	0.8	0.110	0.450
K1812L075/24PR	0.75	1.50	24	40	8.0	0.20	0.8	0.110	0.450
K1812L075/33PR	0.75	1.50	33	40	8.0	0.20	0.8	0.110	0.450
K1812L110PR	1.10	2.20	6	100	8.0	0.30	0.8	0.040	0.225
K1812L110/16PR	1.10	2.20	16	100	8.0	0.50	0.8	0.040	0.225
K1812L110/24DR	1.10	2.20	24	100	8.0	0.50	1.2	0.055	0.180
K1812L125PR	1.25	2.50	6	40	8.0	0.40	0.8	0.035	0.140
K1812L150PR	1.50	3.00	6	100	8.0	0.50	0.8	0.030	0.120
K1812L150/12PR	1.50	3.00	12	100	8.0	0.50	1.0	0.030	0.120
K1812L150/16PR	1.50	3.00	16	100	8.0	0.50	0.8	0.030	0.120
K1812L150/24MR	1.50	3.00	24	100	8.0	1.50	1.2	0.030	0.140
K1812L160PR	1.60	3.20	8	100	8.0	1.00	1.0	0.025	0.120
K1812L160/12PR	1.60	3.20	12	100	8.0	1.00	1.0	0.025	0.120
K1812L160/16PR	1.60	3.20	16	40	8.0	1.00	1.0	0.025	0.120
K1812L200DR	2.00	4.00	8	100	8.0	3.00	1.2	0.020	0.080
K1812L250/16DR	2.50	5.00	16	100	8.0	5.00	1.2	0.015	0.100
K1812L260DR	2.60	5.20	6	100	8.0	5.00	1.2	0.015	0.080
K1812L300DR	3.00	6.00	6	100	8.0	5.00	1.2	0.012	0.060

产品尺寸 (Unit: mm) :




P/N	Marking (标识)	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
K1812L010DR	T010	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L014DR	T014	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L020DR	T020	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L020/60DR	T020	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L030DR	T030	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L035PR	T035	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L050PR	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L075PR	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L075/24PR	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L075/33PR	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L110PR	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L110/16PR	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L110/24DR	T110	4.37	4.73	3.07	3.41	0.80	1.20	0.30
K1812L125PR	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L150PR	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L150/12PR	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L150/16PR	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L150/24MR	T150	4.37	4.73	3.07	3.41	1.20	1.70	0.30
K1812L160PR	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L160/12PR	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L160/16PR	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30
K1812L200DR	T200	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L250/16DR	T250	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L260DR	T260	4.37	4.73	3.07	3.41	0.60	1.00	0.30
K1812L300DR	T300	4.37	4.73	3.07	3.41	0.60	1.00	0.30

环境温度与工作电流关系特性曲线：

P/N	工作环境温度								
	-40℃	-20℃	0℃	25℃	40℃	50℃	60℃	70℃	85℃
K1812L010DR	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
K1812L014DR	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
K1812L020DR	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
K1812L020/60DR	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
K1812L030DR	0.44	0.39	0.35	0.30	0.26	0.23	0.21	0.18	0.15
K1812L035PR	0.51	0.46	0.41	0.35	0.30	0.27	0.25	0.21	0.18
K1812L050PR	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
K1812L075PR	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
K1812L075/24PR	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
K1812L075/33PR	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
K1812L110PR	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
K1812L110/16PR	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
K1812L110/24DR	2.00	1.70	1.40	1.10	0.95	0.88	0.80	0.73	0.61
K1812L125PR	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
K1812L150PR	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
K1812L150/12PR	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
K1812L150/16PR	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
K1812L150/24MR	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
K1812L160PR	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
K1812L160/12PR	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
K1812L160/16PR	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
K1812L200DR	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
K1812L250/16DR	3.85	3.45	3.00	2.50	2.05	1.85	1.75	1.30	1.10
K1812L260DR	4.00	3.52	3.06	2.60	2.34	2.08	1.95	1.39	1.04
K1812L300DR	4.40	3.90	3.50	3.00	2.60	2.30	2.10	1.80	1.50

动作电流时间曲线表：

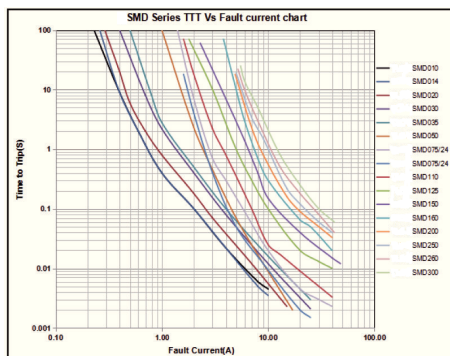

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC](#) category:

Click to view products by [Yongyutai Electronics](#) manufacturer:

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3344-000](#) [RF3350-000](#) [RF3382-000](#) [SMD125-2](#) [RF2171-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [RF3288-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [F95456-000](#) [RS30-090](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-110](#) [RS60SB-135](#) [SB250-030](#) [SB250-040](#) [SB250-200](#) [SB250-600](#) [R60-375](#) [SMD1812K125SF16V](#) [SMD1812K200SF8V](#) [SMD1812K014SF60V](#) [K60X005](#) [K250R120](#) [0ZCH0110AF2E](#) [0603L001/60YR](#)