


## Silicon Controlled Rectifiers

Equivalent Circuit:

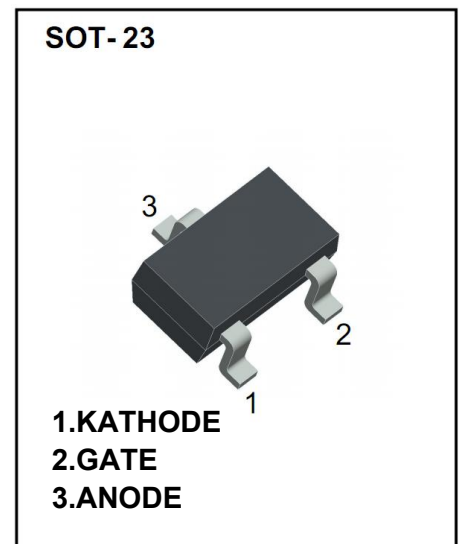

These devices are intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.

Weight : 0.22 gram

### MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Rating	Symbol	MCR100-6	MCR100-8	Unit
Repetitive Peak Off-stage Voltage	VDRM	400	600	V
Collector-Base Voltage	ITRMS	0.8		A
Gate Trigger Current	IGT(Q1)	200		μA
Junction Temperature Range	TJ	+150		°C
Storage Temperature Range	TStg	-55 to +150		°C





# MCR100-6/MCR100-8


## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Max	Unit	
On state voltage	V <sub>TM</sub> *	I <sub>TM</sub> =1A			V	
Gate trigger voltage	V <sub>GT</sub>	V <sub>AK</sub> =7V			V	
Peak Repetitive forward and reverse blocking voltage MCR100-6 MCR100-8	V <sub>DRM</sub> AND V <sub>RRM</sub>	I <sub>DRM</sub> =10μA	400 600		V	
Peak forward or reverse blocking Current	I <sub>DRM</sub> I <sub>RRM</sub>	V <sub>AK</sub> =Rated V <sub>DRM</sub> or V <sub>RRM</sub>		10	μA	
Holding current	I <sub>H</sub>	I <sub>HL</sub> =20mA V <sub>AK</sub> =7V		5	mA	
Gate trigger current	I <sub>GT</sub>	V <sub>AK</sub> =7V	A2	5	15	μA
			A1	15	30	μA
			A	30	80	μA
			B	80	200	μA

\* Forward current applied for 1 ms maximum duration, duty cycle ≤ 1%.

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

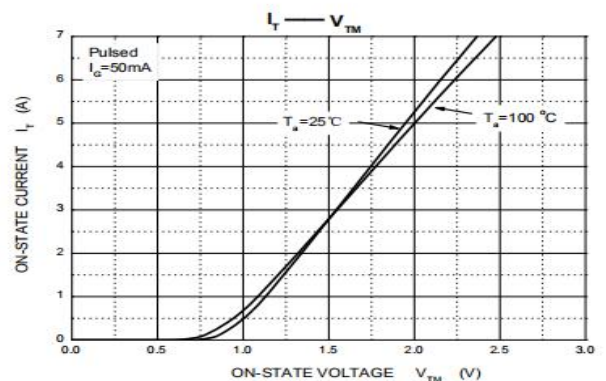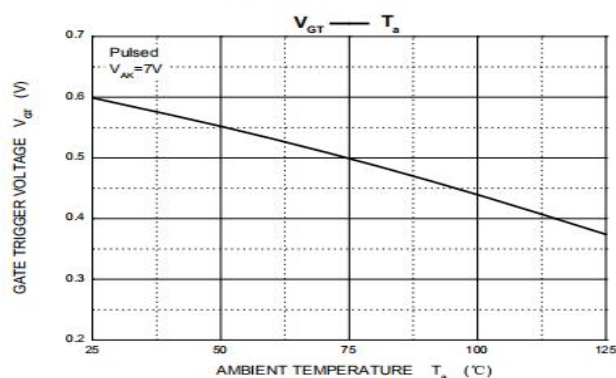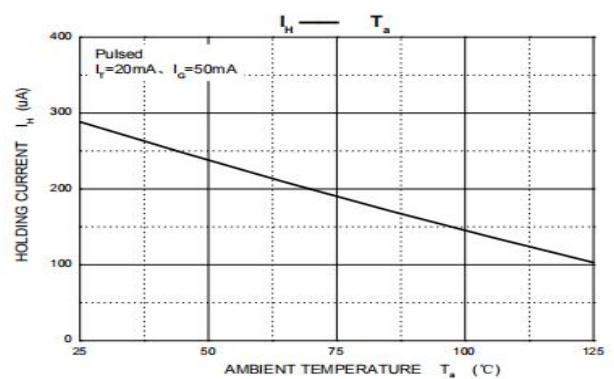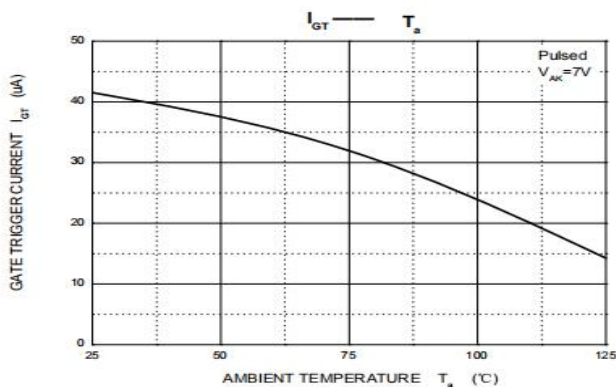

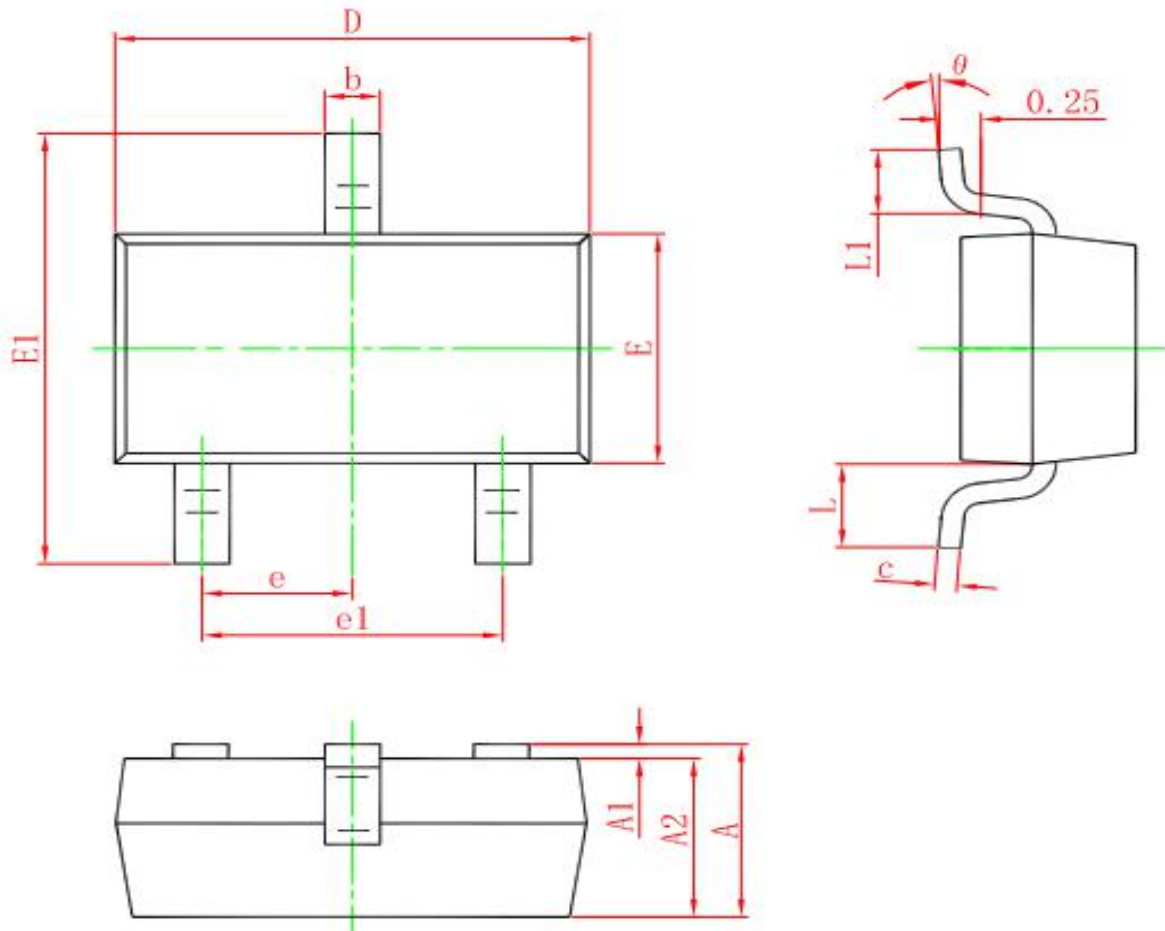**SOT-23 PACKAGE OUTLINE DIMENSIONS**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
$\theta$	0°	8°	0°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [Yongyutai Electronics](#) manufacturer:*

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [QJ8006NH4TP](#) [QJ8010NH5TP](#) [QJ8008NH4TP](#)  
[QJ8006NH4RP](#) [QJ8010RH5TP](#) [QJ8010NH4TP](#) [QJ8006LH4TP](#) [BT136-600,127](#) [BT137B-800,118](#) [BT138-800E,127](#) [BTA140-600,127](#)  
[BTA208-800B,127](#) [BTA225-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA212B-800B,118](#) [MCR100-8](#) [100-8](#)  
[BT131S](#) [MCR100-6](#) [MCR100-8](#) [BT136S-800E](#) [BT134S-600E](#) [BT151-650R](#) [BT136-800E](#) [BTA12-800B](#) [BT138S-800E](#) [MAC97A8](#)  
[BT137S-800E](#) [BT169-23](#) [BT131-89-2L](#) [MAC97A6-23-3L](#) [BT169-89-2L](#) [BT139-800E](#) [MCR100-8](#) [BT169-MS](#) [MCR100-8](#) [MCR100-6](#)  
[BTA408X-1000C0T,127](#) [ACT108-800EQP](#) [BTA201-800ER,116](#) [T810](#) [2P4M](#) [BT137-600E](#)