

<p style="text-align: center;">SOD-123FL</p> <p style="text-align: center;">Dimensions in millimeters</p>	<p style="text-align: center;">FEATURES</p> <ul style="list-style-type: none"> ◆ Glass passivated device ◆ Ideal for surface mouted applications ◆ Low reverse leakage ◆ Metallurgically bonded construction ◆ High temperature soldering guaranteed: 250°C/10 seconds,0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension 		
<p style="text-align: center;">MECHANICAL DATA</p> <p>Case: JEDEC SOD-123FL molded plastic body over passivated chip Terminals: Solderable per MIL-STD-750, Method 2026 Polarity: Color band denotes cathode end Mounting Position: Any Weight:0.0007 ounce, 0.02 grams</p>			
<p style="text-align: center;">MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p>			
<p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.</p>			
<p>Catalog Number</p>	<p>SYMBOLS</p>	<p style="text-align: center;">SM4007PL</p>	<p>UNITS</p>
<p>Maximum repetitive peak reverse voltage</p>	<p>V_{RRM}</p>	<p style="text-align: center;">1000</p>	<p>VOLTS</p>
<p>Maximum RMS voltage</p>	<p>V_{RMS}</p>	<p style="text-align: center;">700</p>	<p>VOLTS</p>
<p>Maximum DC blocking voltage</p>	<p>V_{DC}</p>	<p style="text-align: center;">1000</p>	<p>VOLTS</p>
<p>Maximum average forward rectified current at $T_A=65^{\circ}C$ (NOTE 1)</p>	<p>$I_{(AV)}$</p>	<p style="text-align: center;">0.9</p>	<p>Amp</p>
<p>Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_L=25^{\circ}C$</p>	<p>I_{FSM}</p>	<p style="text-align: center;">25.0</p>	<p>Amps</p>
<p>Maximum instantaneous forward voltage at 1.0A</p>	<p>V_F</p>	<p style="text-align: center;">1.1</p>	<p>Volts</p>
<p>Maximum DC reverse current $T_A=25^{\circ}C$ at rated DC blocking voltage $T_A=125^{\circ}C$</p>	<p>I_R</p>	<p style="text-align: center;">10.0 50.0</p>	<p>μA</p>
<p>Typical junction capacitance (NOTE 2)</p>	<p>C_J</p>	<p style="text-align: center;">4</p>	<p>pF</p>
<p>Typical thermal resistance (NOTE 3)</p>	<p>$R_{\theta JA}$</p>	<p style="text-align: center;">180</p>	<p>K/W</p>
<p>Operating junction and storage temperature range</p>	<p>T_J, T_{STG}</p>	<p style="text-align: center;">-55 to +150</p>	<p>$^{\circ}C$</p>
<p>Note: 1. Averaged over any 20ms period. 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C. 3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted</p>			

FIG.1 – TYPICAL FORWARD CHARACTERISTIC

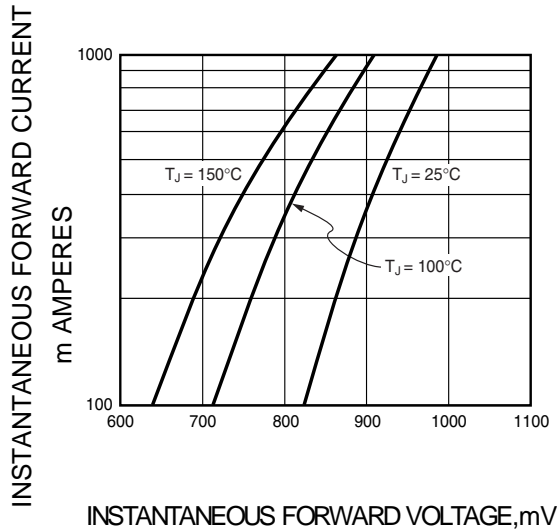


FIG.2 – TYPICAL JUNCTION CAPACITANCE

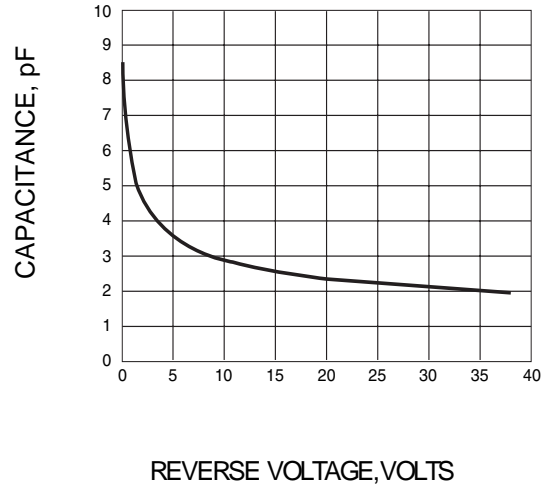


FIG.3 – TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS


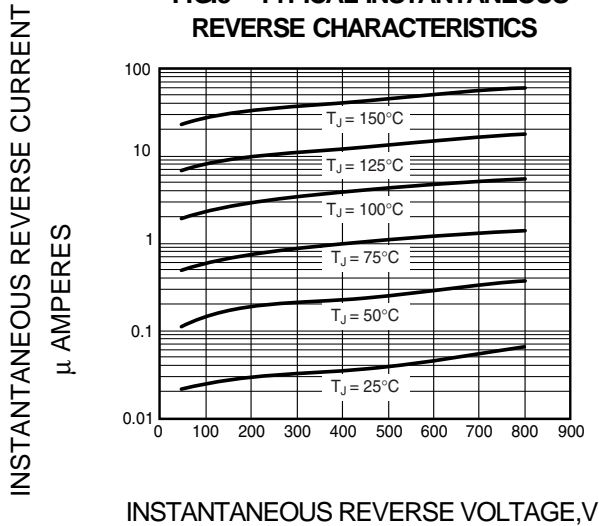


FIG.4 – FORWARD DERATING CURVE

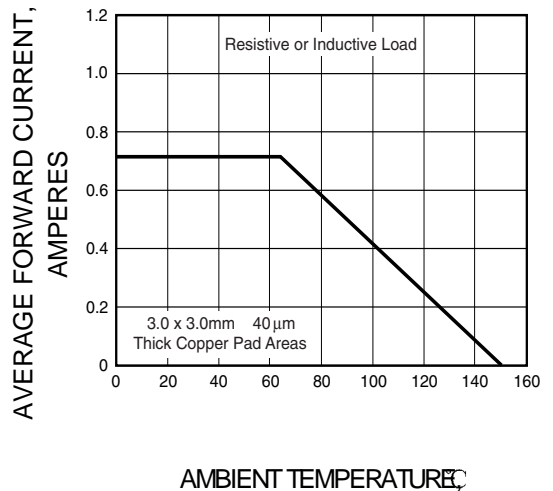

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Yongyutai Electronics manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-](#)
[7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#)
[BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-](#)
[13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#)