

**FEATURES**

- Low profile package with built-in strain relief for surface mounted applications
- Glass passivated junction
- Low incremental surge resistance
- Low inductance
- Excellent clamping capability
- 1500W peak pulse power capability with a 10/1000 $\mu$ s waveform, repetition rate (duty cycle): 0.01%
- Very fast response time
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

**MECHANICAL DATA**

**Case:** JEDEC DO-214AB (SMC) molded plastic over passivated junction

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026. High temperature soldering: 250°C/10 seconds at terminals.

**Polarity:** For uni-directional types the band denotes the cathode, which is positive with respect to the anode under normal TVS operation.

**Standard Packaging:** 16mm tape (EIA STD RS-481)


**Weight:** 0.007 oz., 0.21 g

**Packaging Codes – Options (Antistatic):**

51 – 1K per Bulk box, 10K/carton

57 – 850 per 7" plastic Reel (16mm tape), 8.5K/carton

9A – 3.5K per 13" plastic Reel (16mm tape), 35K/carton

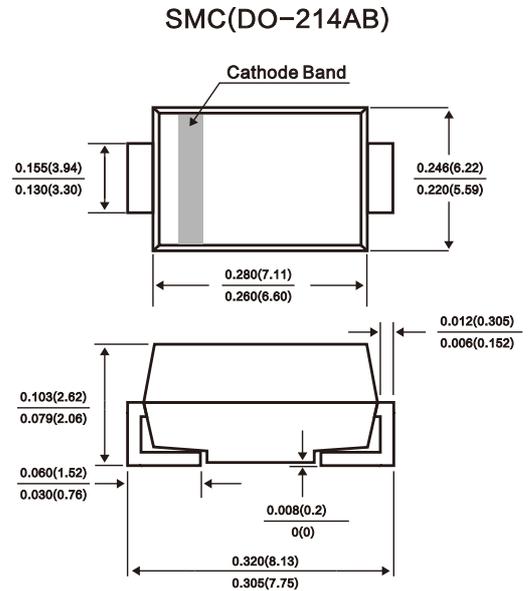

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000 $\mu$ s waveform	PPPM	1500	W
Maximum Instantaneous Forward Voltage at 50.0A for Unidirectional Only	V <sub>F</sub>	3.5	Volts
Power dissipation on infinite heatsink, T <sub>A</sub> = 50°C	P <sub>M(AV)</sub>	6.5	W
Peak forward surge current 8.3ms single half sine-wave uni-directional only <sup>(2)</sup>	I <sub>FSM</sub>	200	A
Thermal resistance junction to ambient air <sup>(3)</sup>	R <sub>θJA</sub>	75	°C/W
Thermal resistance junction to leads	R <sub>θJL</sub>	15	°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C

**Notes:** (1) Non-repetitive current pulse, per Fig.3 and derated above T<sub>A</sub> = 25°C per Fig. 2

(2) Mounted on 0.31 x 0.31" (8.0 x 8.0mm) copper pads to each terminal

(3) Mounted on minimum recommended pad layout

## Electrical Characteristics

- Notes:** (1) Pulse test:  $t_p \leq 50\text{ms}$   
(2) Surge current waveform per Fig. 3 and derate per Fig. 2  
(3) All terms and symbols are consistent with ANSI/IEEE CA62.35  
(4) For bidirectional types with  $V_R$  10 volts and less, the  $I_D$  limit is doubled

Fig. 1 – Peak Pulse Power Rating Curve

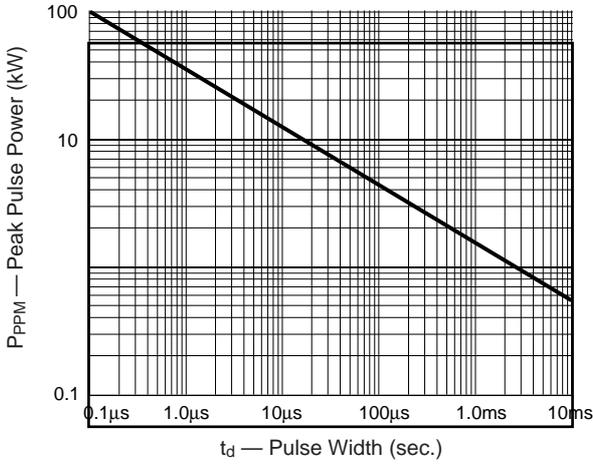


Fig. 2 – Pulse Derating Curve

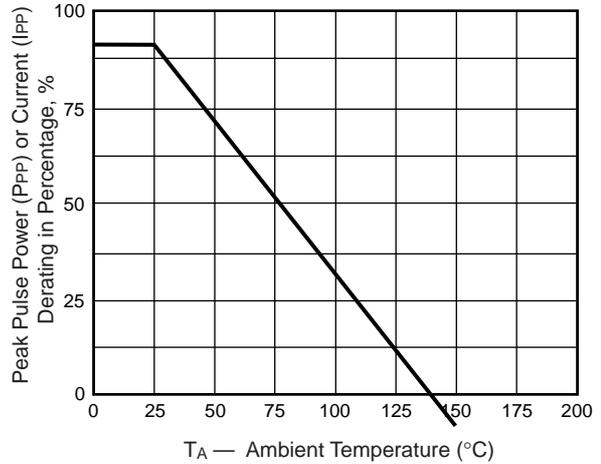


Fig. 3 – Pulse Waveform

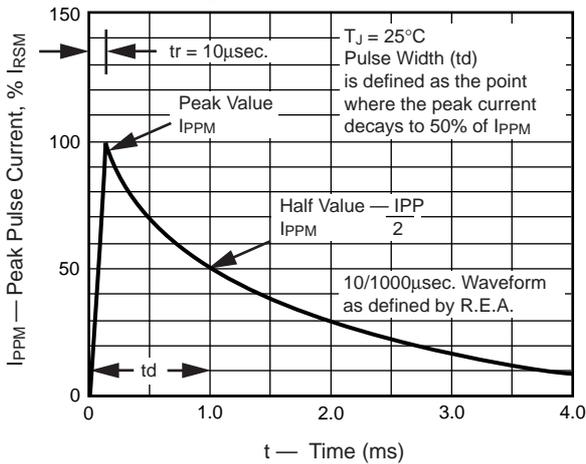


Fig. 4 – Typical Junction Capacitance Uni-Directional

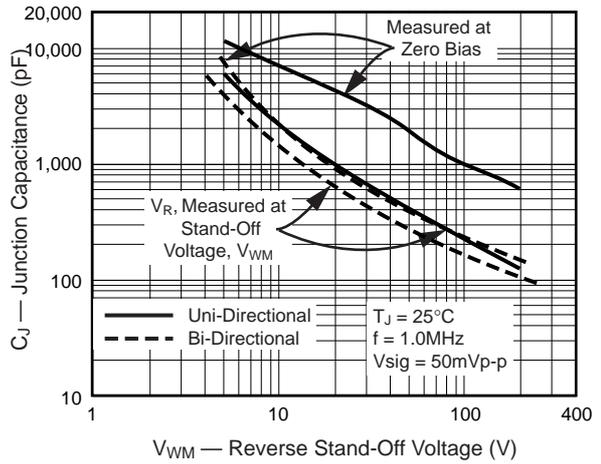


Fig. 5 – Typical Transient Thermal Impedance


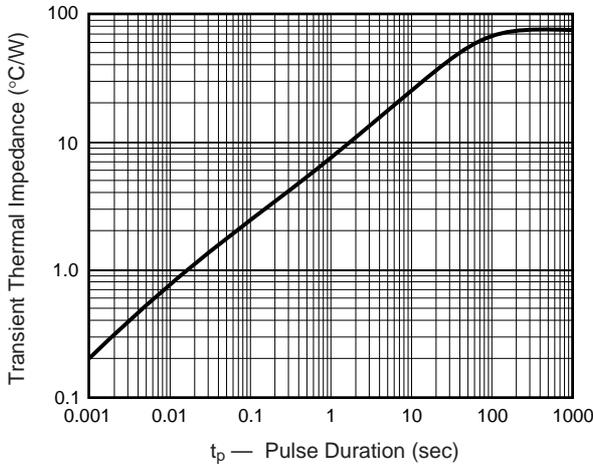


Fig. 6 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Use Only

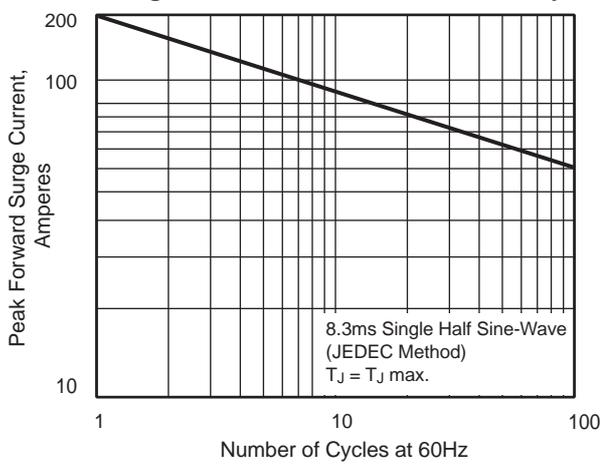

**ORDERING INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Youtai](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)  
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)  
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)