


FEATURES

- Ultra low capacitance: 0.3pF typical (I/O to I/O)
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- Up to 4 date lines and one power line protects
- Complies with following standards
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 25\text{kv}$
 - Contact discharge: $\pm 20\text{kv}$
 - IEC 61000-4-4(EFT)40A(5/50ns)
 - IEC 61000-4-5(Lightning): 4A (8/20 μs)
- ROHS Compliant

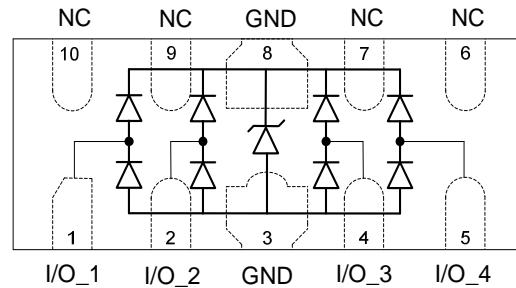

APPLICATIONS

- Serial ATA
- PCI Express
- MDDI Ports
- Display Ports
- High Definition Multi-Media Interface (HDMI)
- Digital Visual Interface (DVI)

MACHANICAL DATA

- DFN2510 package
- Flammability Rating: UL 94V-0
- Terminal: Matte tin plated.
- High temperature soldering guaranteed: 260°C/10s
- Reel size: 7 inch



ABSOLUTE MAXIMUM RATING





Symbol	Parameter	Value	Units
P _{PP}	Peak Pulse Power (8/20 μs)	80	W
I _{PP}	Peak Pulse Current (8/20 μs)	4	A
V _{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 25 ± 20	kV
T _{OPT}	Operating Temperature	-55/+125	°C
T _{STG}	Storage Temperature	-55/+150	°C

ELECTRICAL CHARACTERISTICS (T_{amb}=25 °C)



Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V _{RWM}	Reverse Working Voltage	Any I/O pin to ground			5.0	V
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA Any I/O pin to ground	7.0	8.0	9.5	V
I _R	Reverse Leakage Current	V _{RWM} = 5V Any I/O pin to ground			0.1	µA
V _C	Clamping Voltage	I _{PP} = 1A, t _p = 8/20µs Any I/O pin to ground			9	V
V _C	Clamping Voltage	I _{PP} = 4A, t _p = 8/20µs Any I/O pin to ground			16	V
C _J	Junction Capacitance	V _R = 0V, f = 1MHz Between I/O pins		0.3	0.4	pF
C _J	Junction Capacitance	V _R = 0V, f = 1MHz Between I/O pin to ground			0.8	pF

ELECTRICAL CHARACTERISTICS CURVE

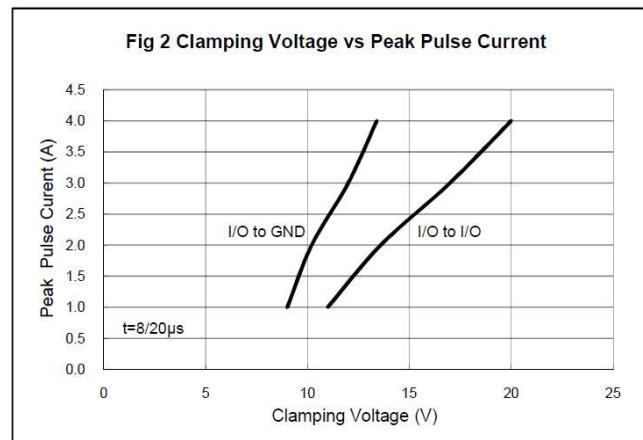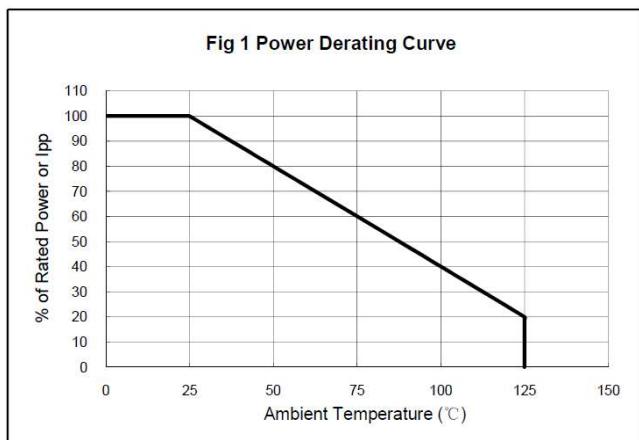

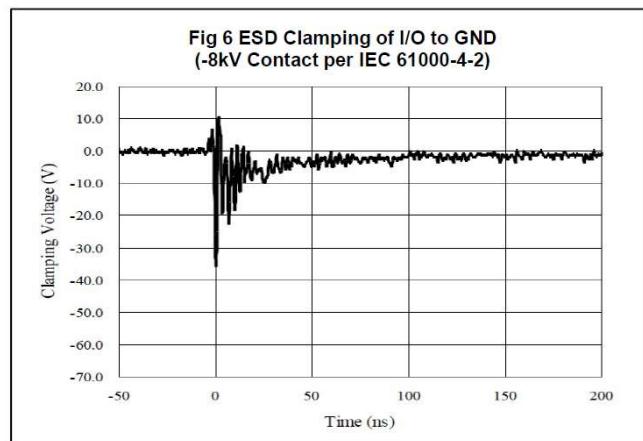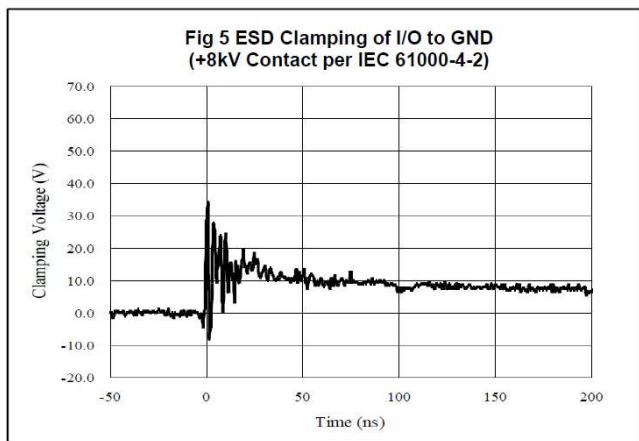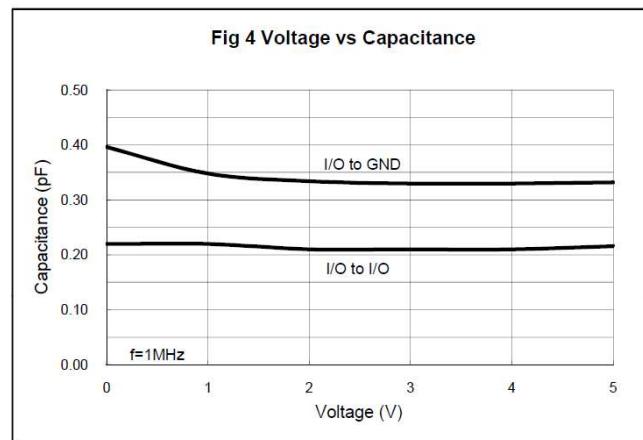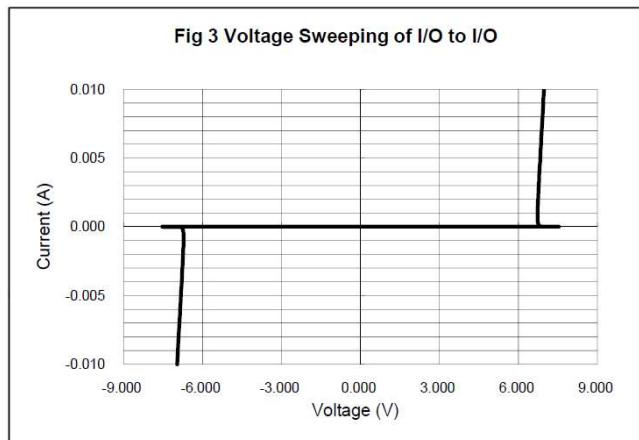


DFN2510 PACKAGE OUTLINE DIMENSIONS

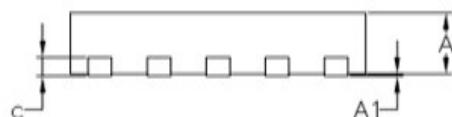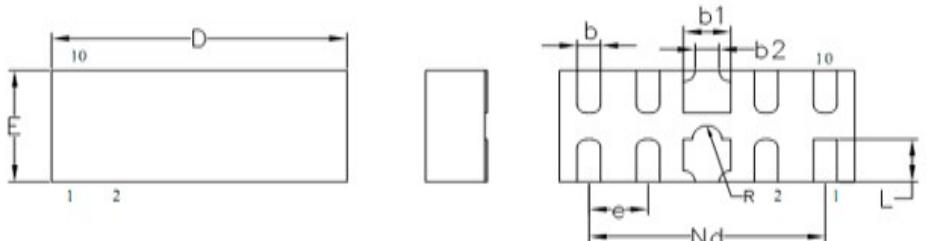

Symbol	Dimensions (mm)		
	Min.	Nom.	Max.
D	2.45	2.50	2.55
E	0.95	1.00	1.05
b1	0.35	0.40	0.45
b2	0.20REF		
b	0.15	0.20	0.25
L	0.33	0.38	0.43
Nd	2.00BSC		
e	0.50BSC		
R	0.10	0.125	0.15
A	0.45	0.50	0.55
c	0.15REF		
A1	0.00	-	0.05

Marking

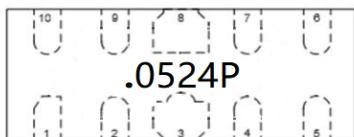

Ordering information

Order code	Package	Base qty	Delivery mode
UMW ESD0524P	DFN2510	3000	Tape and reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#) [E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)