


## Descriptions

The ESD5B5VL is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5B5VL may be used to provide ESD protection up to  $\pm 8\text{kV}$  (contact discharge) according to IEC61000-4-2, and withstand peak pulse current up to 3.5A (8/20 $\mu\text{s}$ ) according to IEC61000-4-5.

The ESD5B5VL is available in SOD-523 package. Standard products are Pb-free and Halogen-free.

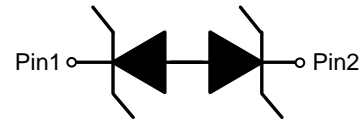

**Circuit diagram**

## Features

- Stand-off voltage:  $\pm 5\text{V}$  Max
- Transient protection for each line according to IEC61000-4-2 (ESD):  $\pm 8\text{kV}$  (contact discharge)  
IEC61000-4-4 (EFT): 40A (5/50ns)  
IEC61000-4-5 (surge): 3.5A (8/20 $\mu\text{s}$ )
- Capacitance:  $C_J = 5\text{pF}$  typ.
- Solid-state silicon technology

## Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- MP3/MP4/PMP Players







## Absolute maximum ratings


Parameter	Symbol	Rating	Unit
Peak pulse power ( $t_p = 8/20\mu s$ )	$P_{pk}$	50	W
Peak pulse current ( $t_p = 8/20\mu s$ )	$I_{pp}$	3.5	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 15$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 8$	
Junction temperature	$T_J$	125	$^{\circ}C$
Operating temperature	$T_{OP}$	-40~85	$^{\circ}C$
Lead temperature	$T_L$	260	$^{\circ}C$
Storage temperature	$T_{STG}$	-55~150	$^{\circ}C$

## Electrical characteristics ( $T_A=25^{\circ}C$ , unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	$V_{RWM}$				$\pm 5$	V
Reverse leakage current	$I_R$	$V_{RWM} = 5V$			1	$\mu A$
Reverse breakdown voltage	$V_{BR12}$	$I_T=1mA$	6.5	7.7	8.1	V
Forward voltage	$V_{BR21}$	$I_F=1mA$	6.5	7.8	8.1	V
Clamping voltage	$V_{CL}$	$V_{ESD} = 8kV$		20		V
Clamping voltage	$V_C$	$I_{pp}=1A$ $t_p=8/20\mu s$			10	V
		$I_{pp}=3.5A$ $t_p=8/20\mu s$			14	V
Junction capacitance	$C_J$	$V_R = 0V, f = 1MHz$		5.0	10	pF
		$V_R = 5V, f = 1MHz$		2.5	5	pF

Typical characteristics ( $T_A=25^\circ\text{C}$ , unless otherwise noted)

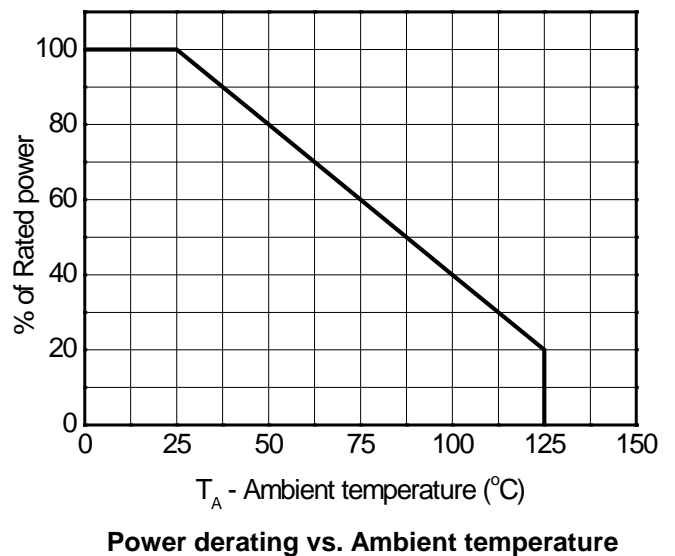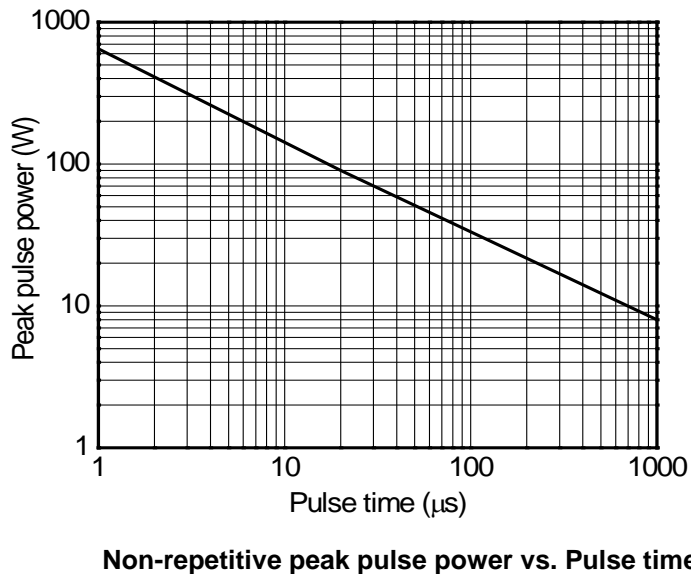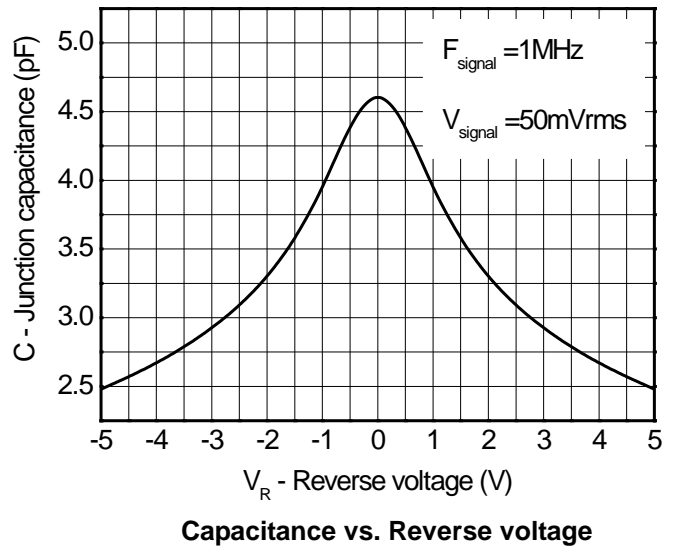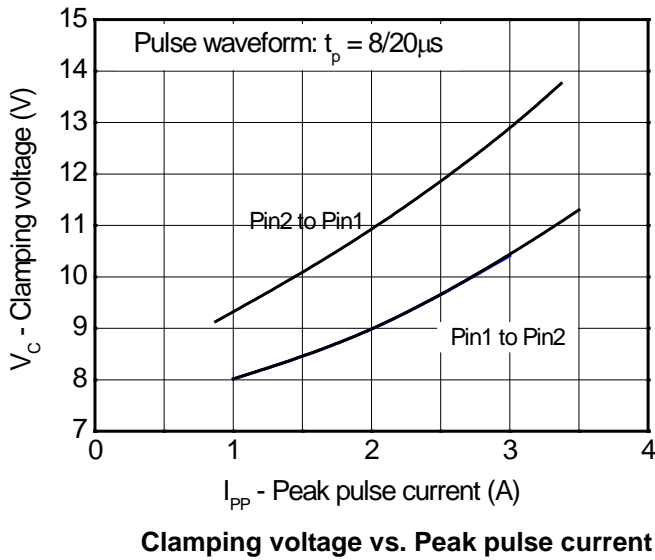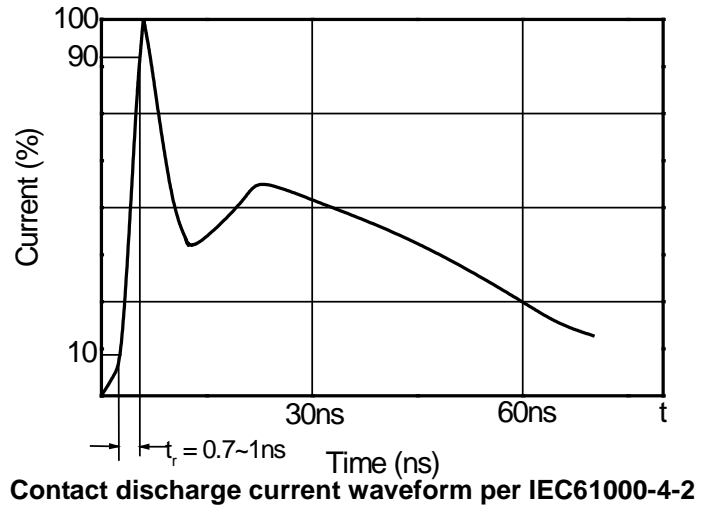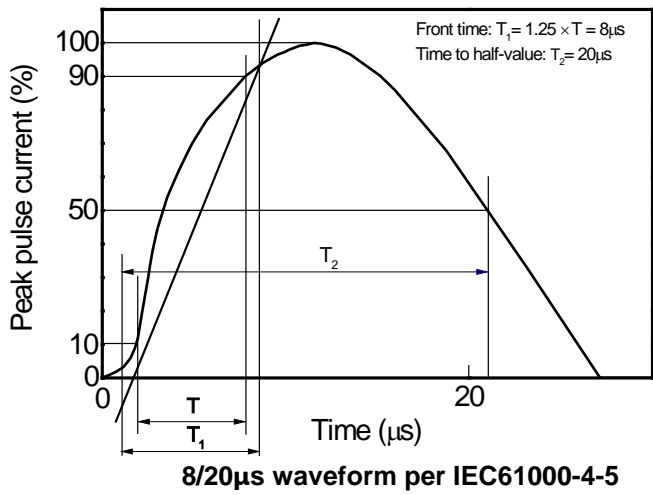

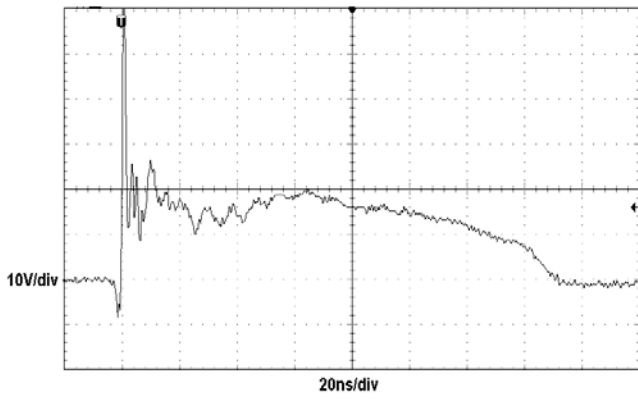


**ESD clamping**  
(+8kV contact discharge per IEC61000-4-2)

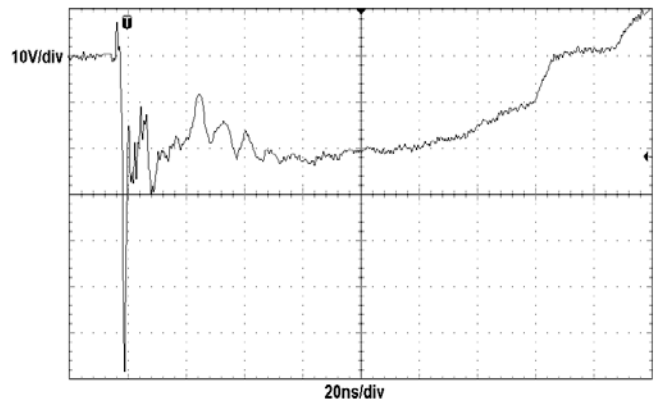

**ESD clamping**  
(-8kV contact discharge per IEC61000-4-2)

Package outline dimensions

SOD-523

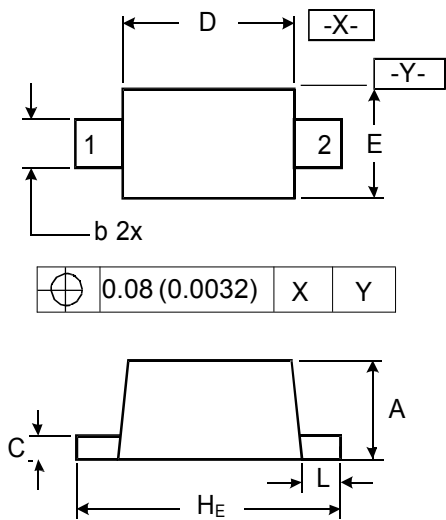

DIMENSIONS

SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	0.50	0.70	0.020	0.028
b	0.25	0.35	0.010	0.014
C	0.07	0.20	0.0028	0.0079
D	1.10	1.30	0.043	0.051
E	0.70	0.90	0.028	0.035
H <sub>E</sub>	1.50	1.70	0.059	0.067
L	0.15	0.25	0.006	0.010

Marking



Ordering information

Order code	Package	Baseqty	Delivery mode
UMW ESD5B5VL	SOD-523	3000	Tape and reel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Youtai](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)  
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#) [D3V3Q1B2DLP3-7](#)  
[D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#) [SMLJ45CA-TP](#) [CEN955](#)  
[W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-](#)  
[01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#)