


Description

The TO-220 package is universally preferred for all commercial-industrial applications at power dissipation levels to approximately 50 watts. The low thermal resistance and low package cost of the TO-220 contribute to its wide acceptance throughout the industry.



Features

- Advanced Process Technology
- Dynamic dv/dt Rating
- 175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated
- Lead-Free
- V_{DS} (V) = -55V
- I_D = -19A
- $R_{DS(ON)} < 100\text{m}\Omega$ ($V_{GS} = -10\text{V}$)

Absolute Maximum Ratings


	Parameter	Max.	Units
I_D @ $T_C = 25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V	-19	A
I_D @ $T_C = 100^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V	-14	
I_{DM}	Pulsed Drain Current ①	-68	
P_D @ $T_C = 25^\circ\text{C}$	Power Dissipation	68	W
	Linear Derating Factor	0.45	W/°C
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy ②	180	mJ
I_{AR}	Avalanche Current ①	-10	A
E_{AR}	Repetitive Avalanche Energy ①	6.8	mJ
dv/dt	Peak Diode Recovery dv/dt ③	-5.0	V/ns
T_J	Operating Junction and Storage Temperature Range	-55 to + 175	°C
T_{STG}	Soldering Temperature, for 10 seconds	300 (1.6mm from case)	
	Mounting torque, 6-32 or M3 screw	10 lbf·in (1.1N·m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{θJC}$	Junction-to-Case		2.2	°C/W
$R_{θCS}$	Case-to-Sink, Flat, Greased Surface	0.50		
$R_{θJA}$	Junction-to-Ambient		62	


Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	-55			V	$V_{GS} = 0\text{V}, I_D = -250\mu\text{A}$
$\Delta V_{(\text{BR})\text{DSS}/\Delta T_J}$	Breakdown Voltage Temp. Coefficient		-0.05		V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = -1\text{mA}$
$R_{DS(\text{on})}$	Static Drain-to-Source On-Resistance			100	$\text{m}\Omega$	$V_{GS} = -10\text{V}, I_D = -10\text{A}$ ④
$V_{GS(\text{th})}$	Gate Threshold Voltage	-2.0		-4.0	V	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$
g_{fs}	Forward Transconductance	4.2			S	$V_{DS} = 25\text{V}, I_D = -10\text{A}$
I_{DSS}	Drain-to-Source Leakage Current			-25	μA	$V_{DS} = -55\text{V}, V_{GS} = 0\text{V}$
				-250		$V_{DS} = -44\text{V}, V_{GS} = 0\text{V}, T_J = 150^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage			100	nA	$V_{GS} = 20\text{V}$
	Gate-to-Source Reverse Leakage			-100		$V_{GS} = -20\text{V}$
Q_g	Total Gate Charge			35		$I_D = -10\text{A}$
Q_{gs}	Gate-to-Source Charge			7.9	nC	$V_{DS} = -44\text{V}$
Q_{gd}	Gate-to-Drain ("Miller") Charge			16		$V_{GS} = -10\text{V}, \text{See Fig. 6 and 13}$ ④
$t_{d(on)}$	Turn-On Delay Time		13			ns
t_r	Rise Time		55			
$t_{d(off)}$	Turn-Off Delay Time		30			
t_f	Fall Time		41			
L_D	Internal Drain Inductance		4.5		nH	Between lead, 6mm (0.25in.) from package and center of die contact
L_S	Internal Source Inductance		7.5			pF
C_{iss}	Input Capacitance		620			
C_{oss}	Output Capacitance		280			
C_{rss}	Reverse Transfer Capacitance		140			$V_{GS} = 0\text{V}$ $V_{DS} = -25\text{V}$ $f = 1.0\text{MHz}, \text{See Fig. 5}$



Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)			-19	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①			-68		
V_{SD}	Diode Forward Voltage			-1.6	V	$T_J = 25^\circ\text{C}, I_S = -10\text{A}, V_{GS} = 0\text{V}$ ④
t_{rr}	Reverse Recovery Time		54	82	ns	$T_J = 25^\circ\text{C}, I_F = -10\text{A}$
Q_{rr}	Reverse Recovery Charge		110	160	nC	$dI/dt = -100\text{A}/\mu\text{s}$ ④
t_{on}	Forward Turn-On Time					Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$)



Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

② Starting $T_J = 25^\circ\text{C}$, $L = 3.6\text{mH}$ $R_G = 25\Omega$, $I_{AS} = -10\text{A}$.

③ $I_{SD} \leq -10\text{A}$, $di/dt \leq -290\text{A}/\mu\text{s}$, $V_{DD} \leq V_{(\text{BR})\text{DSS}}$, $T_J \leq 175^\circ\text{C}$

④ Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.

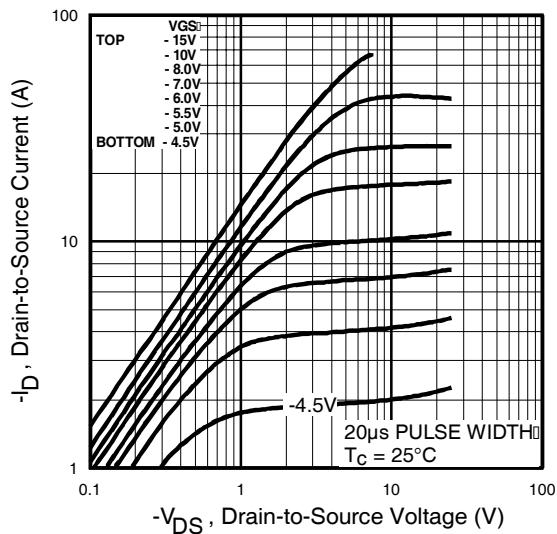


Fig 1. Typical Output Characteristics

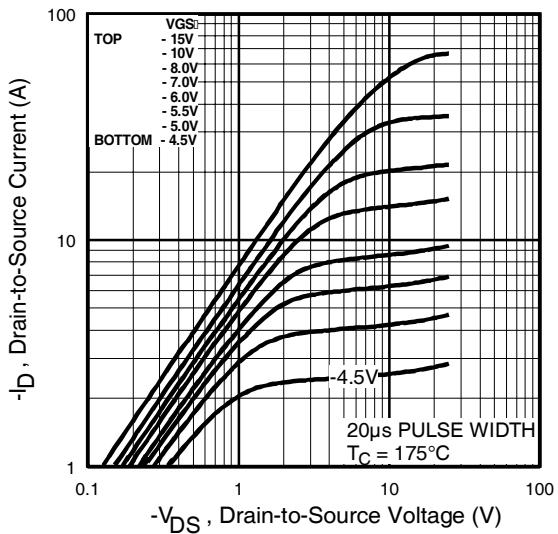


Fig 2. Typical Output Characteristics

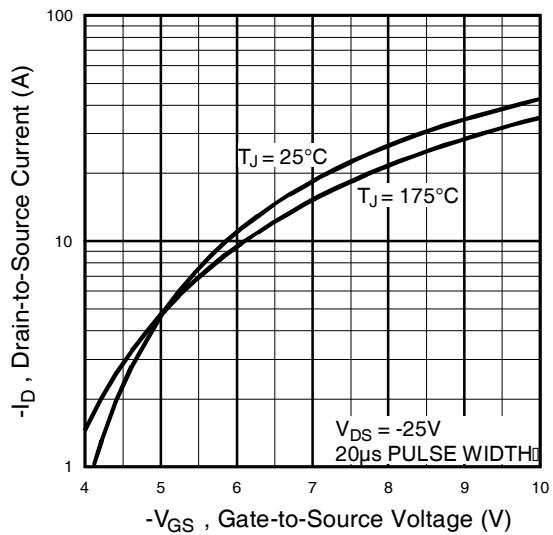


Fig 3. Typical Transfer Characteristics

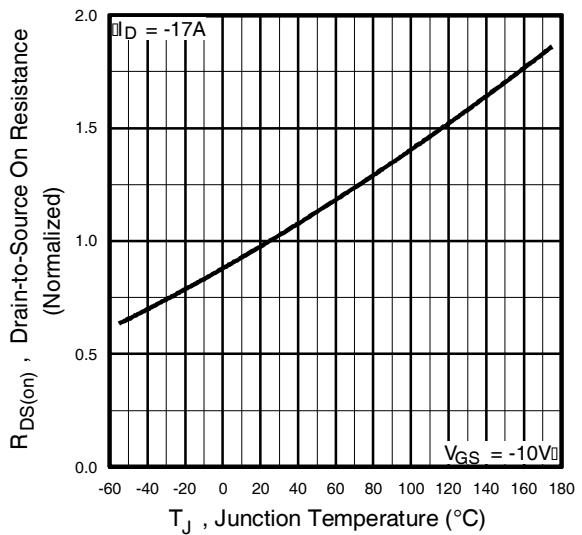


Fig 4. Normalized On-Resistance Vs. Temperature

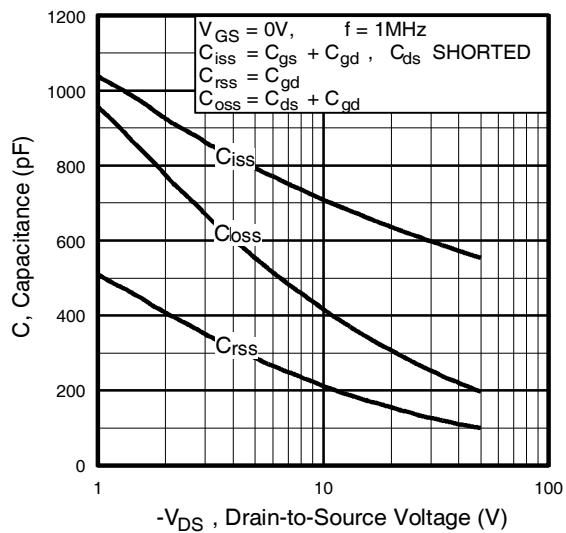


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

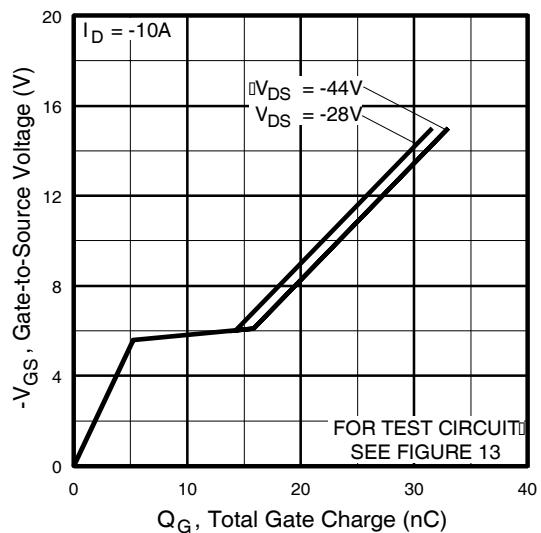


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

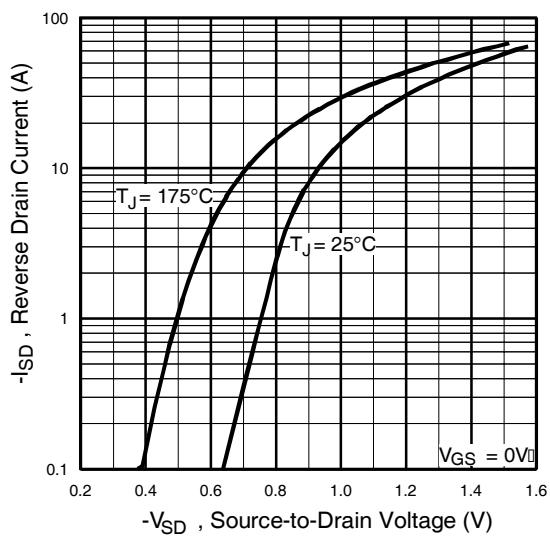


Fig 7. Typical Source-Drain Diode
Forward Voltage

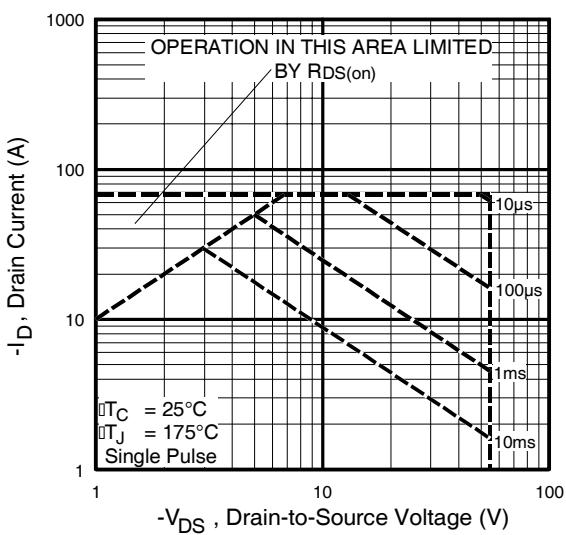


Fig 8. Maximum Safe Operating Area

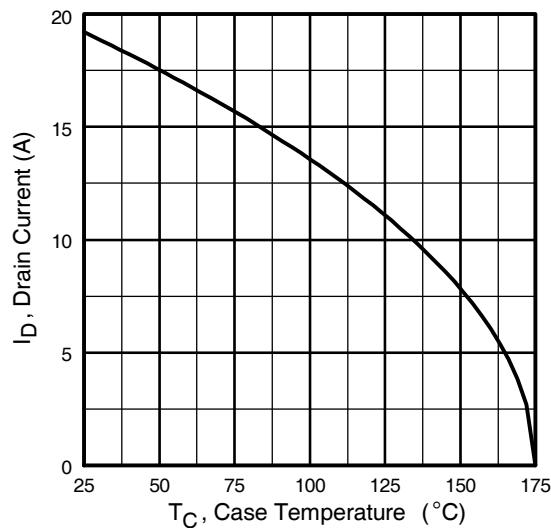


Fig 9. Maximum Drain Current Vs.
Case Temperature

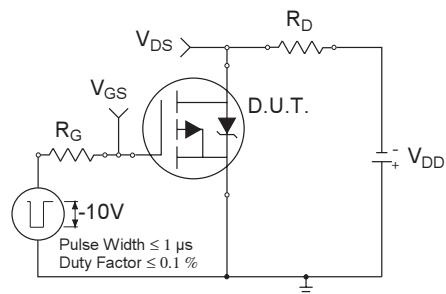


Fig 10a. Switching Time Test Circuit

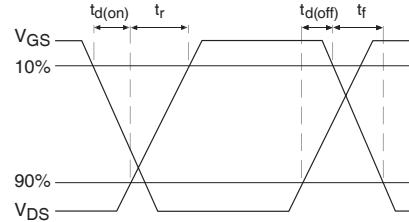


Fig 10b. Switching Time Waveforms

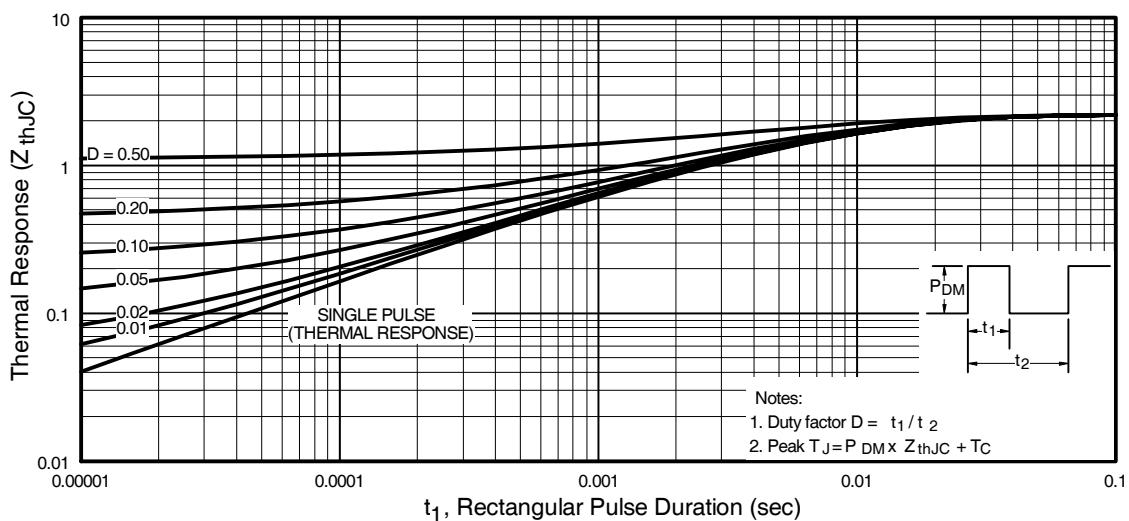


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

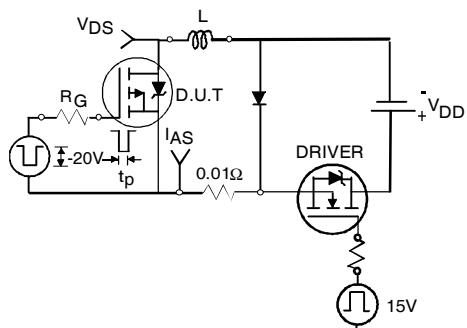


Fig 12a. Unclamped Inductive Test Circuit

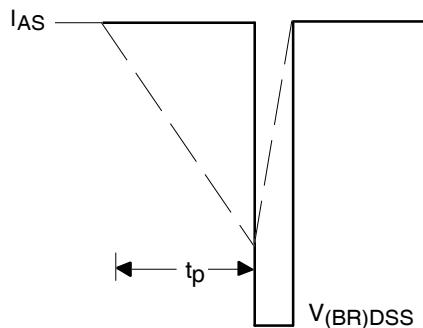


Fig 12b. Unclamped Inductive Waveforms

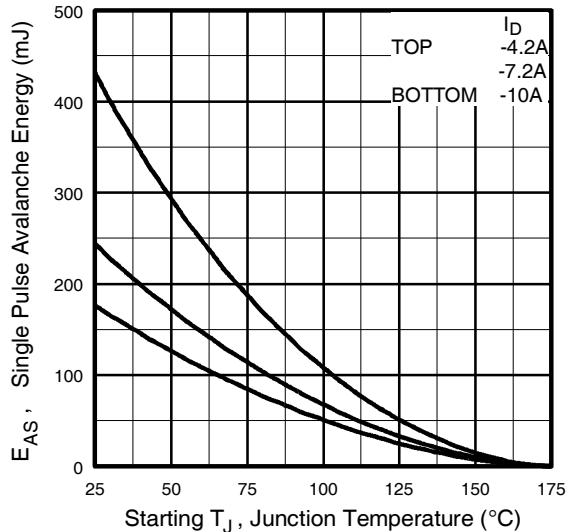


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

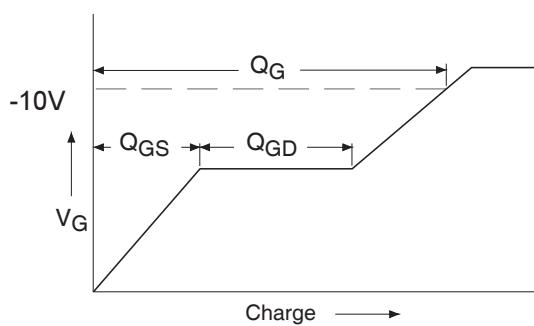


Fig 13a. Basic Gate Charge Waveform

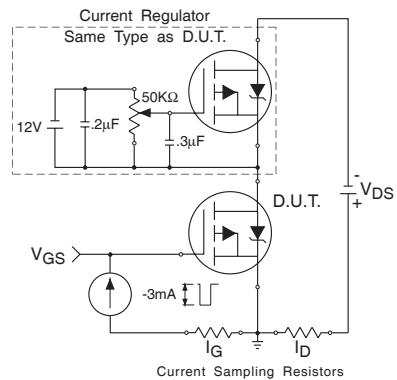



Fig 13b. Gate Charge Test Circuit

Package Mechanical Data TO-220

Marking**Ordering information**

Order code	Package	Baseqty	Deliverymode
UMW IRF9Z34N	TO-220	1000	Tube and box

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)