


### 3-Terminal 0.1A Positive Voltage Regulators

#### DESCRIPTION


The L78LXXA series of fixed voltage monolithic integrated circuit voltage regulators are suitable for applications that required supply up to 100mA.

#### FEATURE

- \*Maximum output current of 100mA
- \*Output voltage of 5V,6V,8V,9V,10V,12V,15V and 24V
- \*Thermal overload protection
- \*Short circuit current limiting

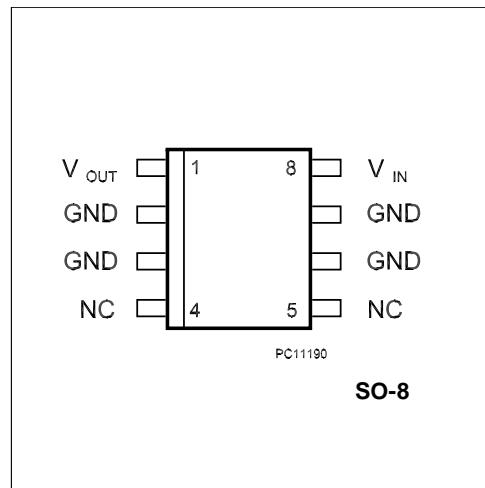

#### BLOCK DIAGRAM

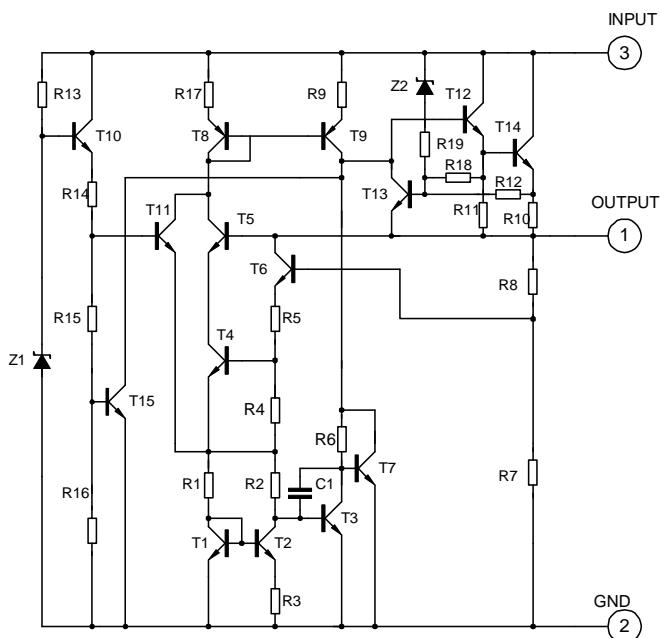

## ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

CHARACTERISTICS	SYMBOL	VALUE	UNITS
Input voltage(for $V_o=5.8V$ ) (for $V_o=12,15V$ )	$V_I$	30	V
	$V_I$	35	V
High power dissipation	$P_d$	700	mW
Operating Junction Temperature Range	$T_{OPR}$	-20~+120	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

## L78L05A ELECTRICAL CHARACTERISTICS

( $V_I=10V, I_o=40mA, 0 < T_j < 125^\circ C, C_1=0.33\mu F, C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	$V_o$	$T_j=25^\circ C$	4.8	5.0	5.2	V
		$7V \leq V_I \leq 20V, I_o=1mA \sim 40mA$	4.75		5.25	V
		$7V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$	4.75		5.25	V (note 2)
Output Voltage(note 3)	$V_o$	$T_j=25^\circ C$	4.9	5.0	5.1	V
		$7V \leq V_I \leq 20V, I_o=1mA \sim 40mA$	4.85		5.15	V
		$7V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$	4.85		5.15	V (note 2)
Load Regulation	$\Delta V_o$	$T_j=25^\circ C, I_o=1mA \sim 100mA$		11	60	mV
		$T_j=25^\circ C, I_o=1mA \sim 40mA$		5.0	30	mV
Line regulation	$\Delta V_o$	$7V \leq V_I \leq 20V, T_j=25^\circ C$		8	150	mV
		$8V \leq V_I \leq 20V, T_j=25^\circ C$		6	100	mV
Quiescent Current	$I_q$			2.0	5.5	mA
Quiescent Current Change	$\Delta I_q$	$8V \leq V_I \leq 20V$			1.5	mA
	$\Delta I_q$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$		40		$\mu V$
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o=5mA$		0.65		$mV/^\circ C$
Ripple Rejection	$RR$	$8V \leq V_I \leq 20V, f=120Hz, T_j=25^\circ C$	40	49		dB
Dropout Voltage	$V_d$	$T_j=25^\circ C$		1.7		V

### L78L06A ELECTRICAL CHARACTERISTICS

( $V_I=12V$ ,  $I_O=40mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	T <sub>j</sub> =25°C	5.75	6.0	6.25	V
		8.5V≤V <sub>I</sub> ≤20V, I <sub>O</sub> =1mA~40mA	5.7		6.3	V
		8.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> , I <sub>O</sub> =1mA~70mA	5.7		6.3	V (note 2)
Output Voltage(note 3)	Vo	T <sub>j</sub> =25°C	5.88	6.0	6.12	V
		8.5V≤V <sub>I</sub> ≤20V, I <sub>O</sub> =1mA~40mA	5.82		6.18	V
		8.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> , I <sub>O</sub> =1mA~70mA	5.82		6.18	V (note 2)
Load Regulation	ΔVo	T <sub>j</sub> =25°C, I <sub>O</sub> =1mA~100mA		12.8	80	mV
		T <sub>j</sub> =25°C, I <sub>O</sub> =1mA~70mA		5.8	40	mV
Line regulation	ΔVo	8.5V≤V <sub>I</sub> ≤20V, T <sub>j</sub> =25°C		64	175	mV
		9V≤V <sub>I</sub> ≤20V, T <sub>j</sub> =25°C		54	125	mV
Quiescent Current	I <sub>Q</sub>			2.0	5.5	mA
Quiescent Current Change	ΔI <sub>Q</sub>	9V≤V <sub>I</sub> ≤20V			1.5	mA
	ΔI <sub>Q</sub>	1mA≤V <sub>I</sub> ≤40mA			0.1	mA
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100kHz		49		μV
Temperature coefficient of Vo	ΔVo/ΔT	I <sub>O</sub> =5mA		0.75		mV/°C
Ripple Rejection	RR	10V≤V <sub>I</sub> ≤20V, f=120Hz, T <sub>j</sub> =25°C	38	46		dB
Dropout Voltage	V <sub>d</sub>	T <sub>j</sub> =25°C		1.7		V

**L78L08A ELECTRICAL CHARACTERISTICS**

( $V_I=14V$ ,  $I_O=40mA$ ,  $0 < T_J < 125^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	$T_J=25^\circ C$	7.7	8.0	8.3	V
		$10.5V \leq V_I \leq 23V$ , $I_O=1mA \sim 40mA$	7.6		8.4	V
		$10.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	7.6		8.4	V (note 2)
Output Voltage(note 3)	Vo	$T_J=25^\circ C$	7.84	8.0	8.16	V
		$10.5V \leq V_I \leq 23V$ , $I_O=1mA \sim 40mA$	7.76		8.24	V
		$10.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	7.76		8.24	V (note 2)
Load Regulation	$\Delta V_o$	$T_J=25^\circ C$ , $I_O=1mA \sim 100mA$		15	80	mV
		$T_J=25^\circ C$ , $I_O=1mA \sim 70mA$		8.0	40	mV
Line regulation	$\Delta V_o$	$10.5V \leq V_I \leq 23V$ , $T_J=25^\circ C$		10	175	mV
		$11V \leq V_I \leq 23V$ , $T_J=25^\circ C$		8	125	mV
Quiescent Current	$I_Q$			2.0	5.5	mA
Quiescent Current Change	$\Delta I_Q$	$11V \leq V_I \leq 23V$			1.5	mA
	$\Delta I_Q$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$		49		$\mu V$
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	$I_O=5mA$		0.75		$mV/C$
Ripple Rejection	RR	$11V \leq V_I \leq 23V$ , $f=120Hz$ , $T_J=25^\circ C$	36	45		dB
Dropout Voltage	$V_d$	$T_J=25^\circ C$		1.7		V

**L78L09A ELECTRICAL CHARACTERISTICS**

( $V_I=15V$ ,  $I_O=40mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	$T_j=25^\circ C$	8.64	9.0	9.36	V
		$11.5V \leq V_I \leq 24V$ , $I_O=1mA \sim 40mA$	8.55		9.45	V
		$11.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	8.55		9.45	V (note 2)
Output Voltage(note 3)	Vo	$T_j=25^\circ C$	8.82	9.0	9.18	V
		$11.5V \leq V_I \leq 24V$ , $I_O=1mA \sim 40mA$	8.73		9.27	V
		$11.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	8.73		9.27	V (note 2)
Load Regulation	$\Delta V_o$	$T_j=25^\circ C$ , $I_O=1mA \sim 100mA$		20	90	mV
		$T_j=25^\circ C$ , $I_O=1mA \sim 40mA$		10	45	mV
Line regulation	$\Delta V_o$	$11.5V \leq V_I \leq 24V$ , $T_j=25^\circ C$		90	200	mV
		$13V \leq V_I \leq 24V$ , $T_j=25^\circ C$		100	150	mV
Quiescent Current	Iq			2.0	5.5	mA
Quiescent Current Change	$\Delta Iq$	$13V \leq V_I \leq 24V$			1.5	mA
	$\Delta Iq$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	VN	$10Hz \leq f \leq 100kHz$		49		$\mu V$
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	$I_O=5mA$		0.75		$mV/C$
Ripple Rejection	RR	$12V \leq V_I \leq 23V$ , $f=120Hz$ , $T_j=25^\circ C$	36	44		dB
Dropout Voltage	Vd	$T_j=25^\circ C$		1.7		V

**L78L12A ELECTRICAL CHARACTERISTICS**

( $V_I=19V$ ,  $I_O=40mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	$T_j=25^\circ C$	11.5	12	12.6	V
		$14.5V \leq V_I \leq 27V$ , $I_O=1mA \sim 40mA$	11.4		12.6	V
		$14.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	11.4		12.6	V (note 2)
Output Voltage(note 3)	Vo	$T_j=25^\circ C$	11.76	12.0	12.24	V
		$14.5V \leq V_I \leq 27V$ , $I_O=1mA \sim 40mA$	11.64		12.36	V
		$14.5V \leq V_I \leq V_{MAX}$ , $I_O=1mA \sim 70mA$	11.64		12.36	V (note 2)
Load Regulation	$\Delta V_o$	$T_j=25^\circ C$ , $I_O=1mA \sim 100mA$		25	150	mV
		$T_j=25^\circ C$ , $I_O=1mA \sim 40mA$		12	75	mV
Line regulation	$\Delta V_o$	$14.5V \leq V_I \leq 27V$ , $T_j=25^\circ C$		25	300	mV
		$16V \leq V_I \leq 27V$ , $T_j=25^\circ C$		20	250	mV
Quiescent Current	I <sub>Q</sub>			2.0	5.5	mA
Quiescent Current Change	$\Delta I_Q$	$16V \leq V_I \leq 27V$			1.5	mA
	$\Delta I_Q$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V <sub>N</sub>	$10Hz \leq f \leq 100kHz$		80		$\mu V$
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	$I_O=5mA$		1.0		$mV/^\circ C$
Ripple Rejection	RR	$15V \leq V_I \leq 25V$ , $f=120Hz$ , $T_j=25^\circ C$	36	42		dB
Dropout Voltage	V <sub>d</sub>	$T_j=25^\circ C$		1.7		V

**L78L15A ELECTRICAL CHARACTERISTICS**

( $VI=23V, Io=40mA, 0 < T_j < 125^\circ C, C1=0.33\mu F, Co=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	$T_j=25^\circ C$	14.4	15	15.6	V
		$17.5V \leq VI \leq 30V, Io=1mA \sim 40mA$	14.25		15.75	V
		$17.5V \leq VI \leq V_{MAX}, Io=1mA \sim 70mA$	14.25		15.75	V (note 2)
Output Voltage(note 3)	Vo	$T_j=25^\circ C$	14.7	15.0	15.3	V
		$17.5V \leq VI \leq 30V, Io=1mA \sim 40mA$	14.55		15.45	V
		$17.5V \leq VI \leq V_{MAX}, Io=1mA \sim 70mA$	14.55		15.45	V (note 2)
Load Regulation	$\Delta Vo$	$T_j=25^\circ C, Io=1mA \sim 100mA$		20	150	mV
		$T_j=25^\circ C, Io=1mA \sim 70mA$		25	150	mV
Line regulation	$\Delta Vo$	$17.5V \leq VI \leq 30V, T_j=25^\circ C$		25	150	mV
		$20V \leq VI \leq 30V, T_j=25^\circ C$		15	75	mV
Quiescent Current	Iq			2.2	6.0	mA
Quiescent Current Change	$\Delta Iq$	$20V \leq VI \leq 30V$			1.5	mA
	$\Delta Iq$	$1mA \leq VI \leq 40mA$			0.1	mA
Output Noise Voltage	VN	$10Hz \leq f \leq 100kHz$		90		$\mu V$
Temperature coefficient of Vo	$\Delta Vo/\Delta T$	$Io=5mA$		1.3		$mV/C$
Ripple Rejection	RR	$18.5V \leq VI \leq 28.5V, f=120Hz, T_j=25^\circ C$	33	39		dB
Dropout Voltage	Vd	$T_j=25^\circ C$		1.7		V

**L78L18A ELECTRICAL CHARACTERISTICS**

( $V_I=27V$ ,  $I_O=40mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	$V_O$	$T_j=25^\circ C$	17.3	18	18.7	V
		$21V \leq V_I \leq 33V, I_O=1mA \sim 40mA$	17.1		18.9	V
		$21V \leq V_I \leq V_{MAX}, I_O=1mA \sim 70mA$	17.1		18.9	V (note 2)
Output Voltage(note 3)	$V_O$	$T_j=25^\circ C$	17.64	18.0	18.36	V
		$21V \leq V_I \leq 33V, I_O=1mA \sim 40mA$	17.46		18.54	V
		$21V \leq V_I \leq V_{MAX}, I_O=1mA \sim 70mA$	17.46		18.54	V (note 2)
Load Regulation	$\Delta V_O$	$T_j=25^\circ C, I_O=1mA \sim 100mA$	30	170	mV	
		$T_j=25^\circ C, I_O=1mA \sim 40mA$	15	85	mV	
Line regulation	$\Delta V_O$	$21V \leq V_I \leq 33V, T_j=25^\circ C$	145	300	mV	
		$22V \leq V_I \leq 33V, T_j=25^\circ C$	135	250	mV	
Quiescent Current	$I_Q$			2.2	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$21V \leq V_I \leq 33V$			1.5	mA
	$\Delta I_Q$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$		150		$\mu V$
Temperature coefficient of $V_O$	$\Delta V_O / \Delta T$	$I_O=5mA$		1.8		$mV/^\circ C$
Ripple Rejection	RR	$23V \leq V_I \leq 33V, f=120Hz, T_j=25^\circ C$	32	38		dB
Dropout Voltage	$V_d$	$T_j=250^\circ C$		1.7		V

### L78L24A ELECTRICAL CHARACTERISTICS

(VI=33V, IO=40mA, 0< Tj < 125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified) (Note 1)


Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C	23	24	25	V
		27V≤Vi≤38V, IO=1mA~40mA	22.8		25.2	V
		27V≤Vi≤VMAX, IO=1mA~70mA	22.8		25.2	V (note 2)
Output Voltage(note 3)	Vo	Tj=25°C	23.5	24	24.5	V
		27V≤Vi≤38V, IO=1mA~40mA	23.25		24.75	V
		27V≤Vi≤VMAX, IO=1mA~70mA	23.25		24.75	V (note 2)
Load Regulation	ΔVo	Tj=25°C, IO=1mA~100mA	40	200	200	mV
		Tj=25°C, IO=1mA~40mA	20	100	100	mV
Line regulation	ΔVo	27V≤Vi≤38V, Tj=25°C	160	300	300	mV
		28V≤Vi≤38V, Tj=25°C	150	250	250	mV
Quiescent Current	Iq		2.2	6.0	6.0	mA
Quiescent Current Change	ΔIq	27V≤Vi≤38V		1.5	1.5	mA
	ΔIq	1mA≤Vi≤40mA		0.1	0.1	mA
Output Noise Voltage	VN	10Hz≤f≤100kHz		200		μV
Temperature coefficient of Vo	ΔVo/ΔT	Io=5mA		2.0		mV/°C
Ripple Rejection	RR	27V≤Vi≤38V, f=120Hz, Tj=25°C	30	37		dB
Dropout Voltage	Vd	Tj=25°C		1.7		V

Note 1: The Maximum steady state usable output current and input voltage are very dependent on the heating sinking and/or lead temperature length of the package. The date above represent pulse test conditions with junction temperatures as indicated at the initiation of test.

Note 2: Power dissipation < 0.75W.

Note 3: Output voltage of 78LXXA.

## TYPICAL APPLICATION

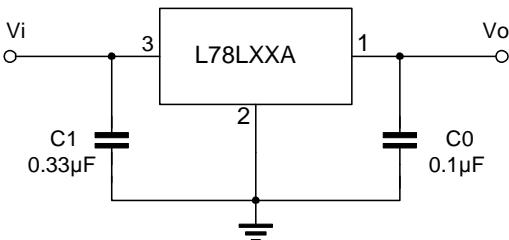

Note 1: To specify an output voltage, substitute voltage value for "XX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Fig .1 L78L05A/12 Output Voltage vs Ambient Temperature

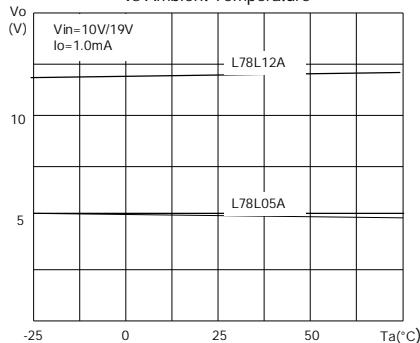


Fig.3 L78L05A Quiescent Current vs Input

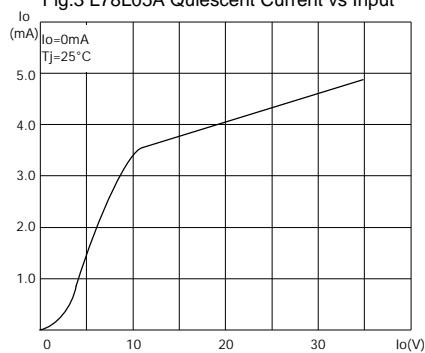


Fig.5 L78L05A/12/24 Output Characteristics

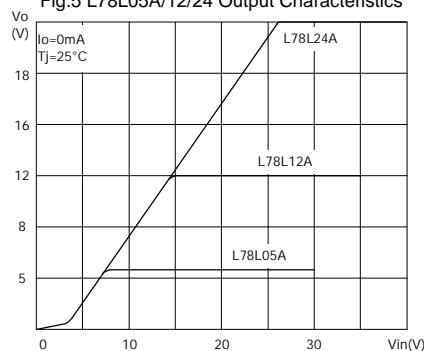


Fig 2 L78 L05A/12 Quiescent Current vs Output Current

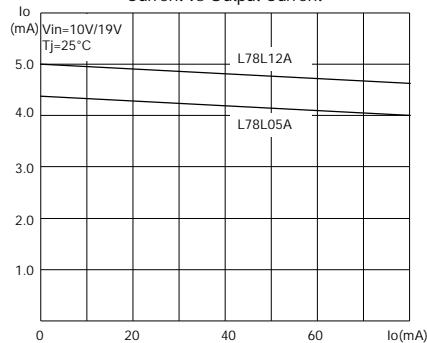


Fig.4 L78L05A /12/24 Thermal Shutdown



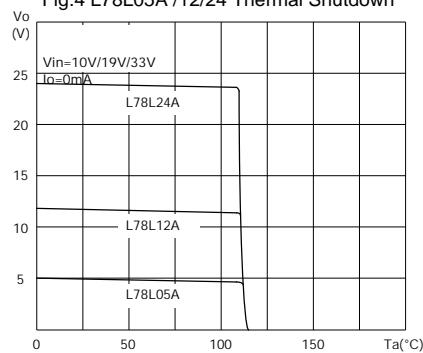



Fig.6 L7805A Dropout Characteristics

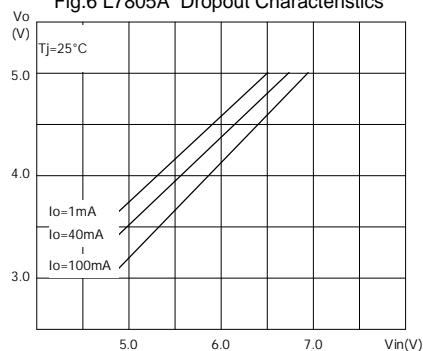

## PACKAGE OUTLINE

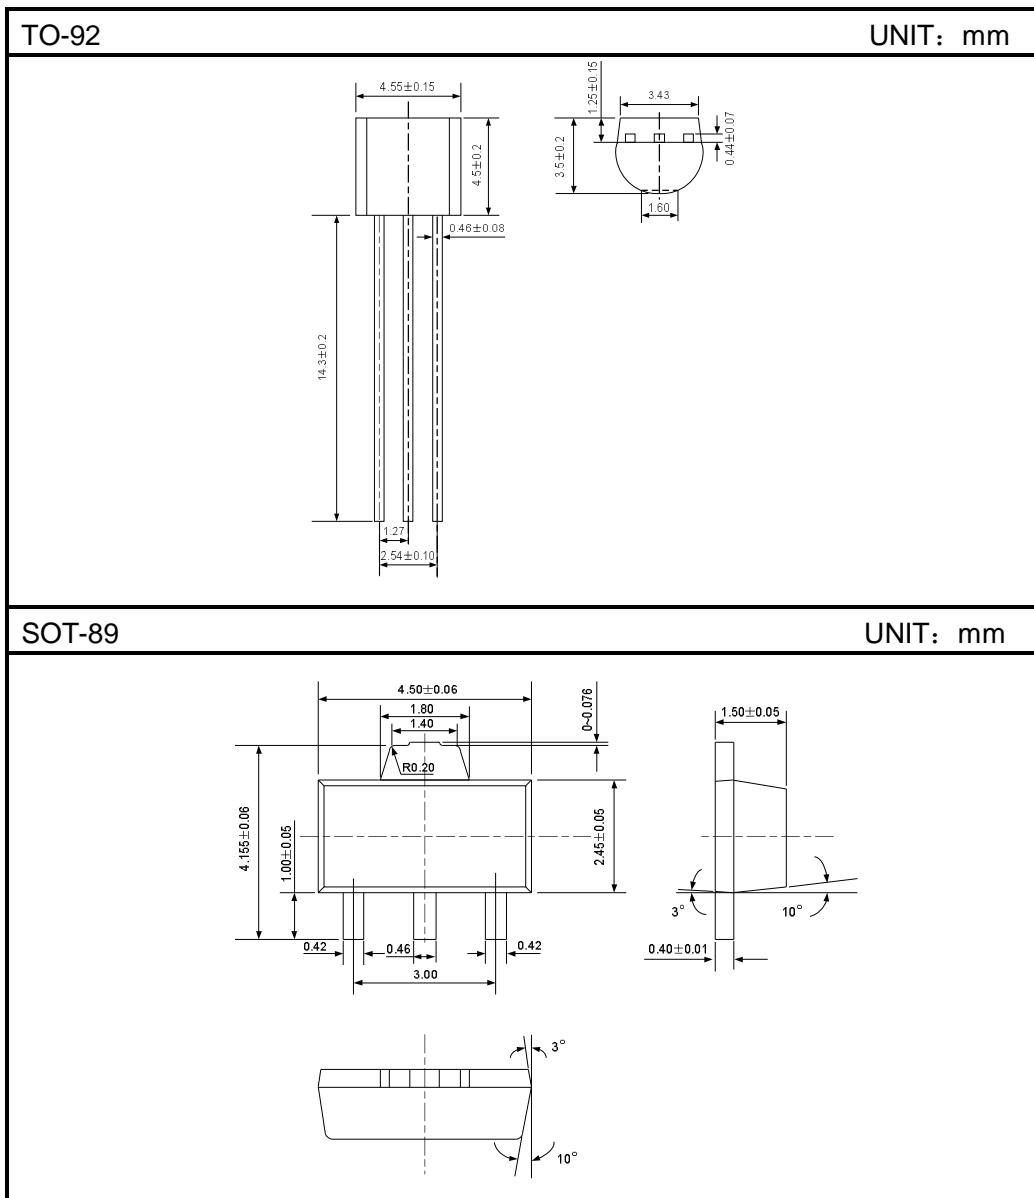

## SOP-8

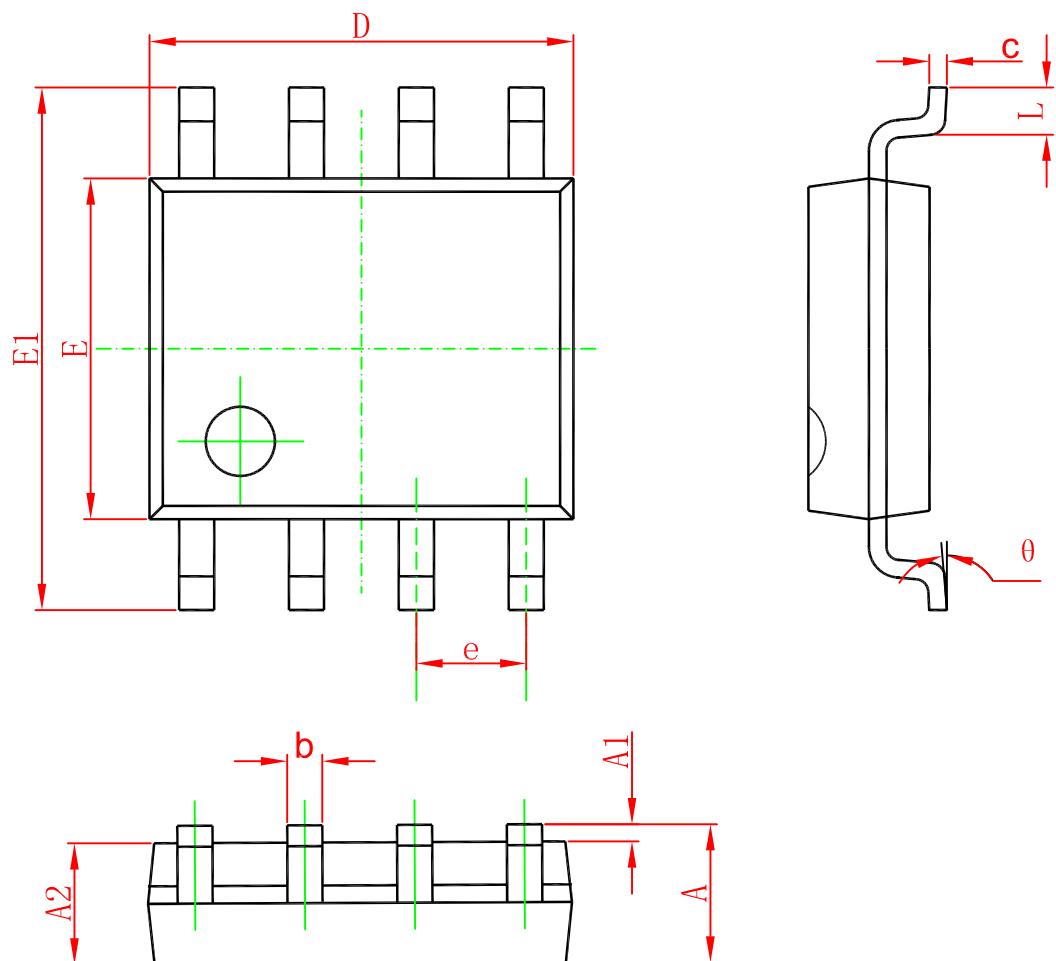

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [Youtai manufacturer](#):***

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#) [HLP2985AIM5X-5.0](#) [HLP2992AIM5X-5.0/NOPB](#) [HMIC5205-5.0YM5-TR](#)