

The LGSOT05CLT1G is a dual monolithic voltage suppressor designed to protect components which are connected to data and transmission lines against ESD. It clamps the voltage just above the logic level supply for positive transients, and to a diode drop below ground for negative transients. It can also work as bidirectional suppressor by connecting only pin1 and 2.

FEATURES

- 2 Unidirectional Transil functions
- Low leakage current: I_R max < 20 μA at V_{RM}
- 300W peak pulse power(8/20 μs)
- Transient protection for data lines as per
IEC61000-4-2(ESD) 15kV(air) 8kV(contact)
IEC61000-4-5(Lightning) see IPPM below
- We declare that the material of product compliant with
RoHS requirements and Halogen Free.

APPLICATIONS

- Computers、Printers
- Communication systems

ABSOLUTE RATINGS($T_a = 25^\circ C$)

Parameter	Symbol	Limits	Unit
IEC 61000-4-2 (ESD) Contact Air		± 8	kV
		± 15	
Peak Pulse Power ($t_p = 8/20\mu s$)	PPP	300	W
		150	°C
Storage temperature	Tstg	-55 ~ +150	°C
Operating Temperature Range	TOP	-40 ~ +125	°C
(10 Second Duration)	TL	260	°C


ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Device	$V_{RW M}$ (V)	I_R (μA) @ $V_{RW M}$	V_{BR} (V) @ I_T (Note 1)	I_T mA	V_c (V) @ $I_{pp} = 1 A$	V_c (V) @ $I_{pp} = 5 A$	$I_{PP}(A)$ @ $t_p=8/20\mu s$	C (pF)
	Max	Max	Min		Max	Max	Max	
LGSOT05CLT1G	5	5	6	1	9.8	12.5	17	220

1. V_{BR} is measured with a pulse test current I_T at an ambient temperature of $25^\circ C$.

Electrical Parameter

Symbol	Parameter
V_{RM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_{CL}	Clamping voltage
I_{RM}	Leakage current
I_{PPM}	Peak pulse current

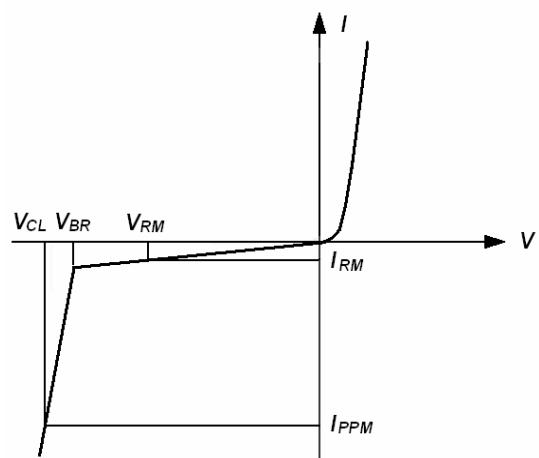

ELRCTIRCAL CHARACTERISTICS CURVES

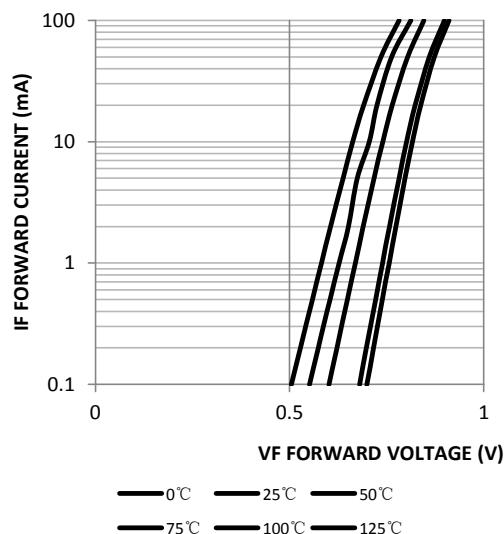


Fig 1. Forward character

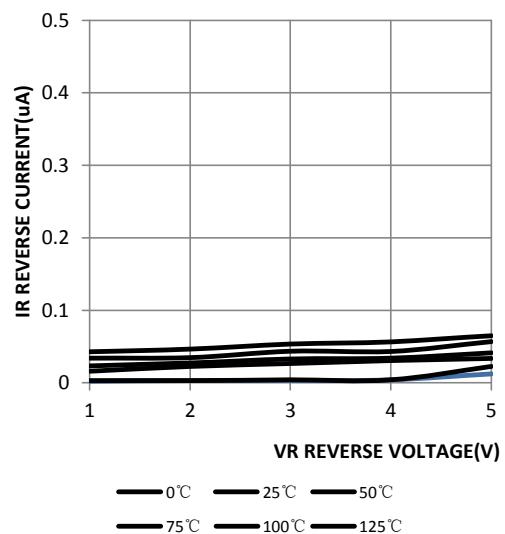


Fig 2. Reverese character


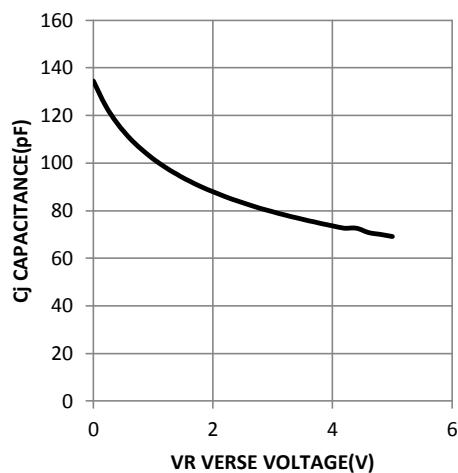



Fig 3. Capacitance character

Outline Drawing – SOT-23

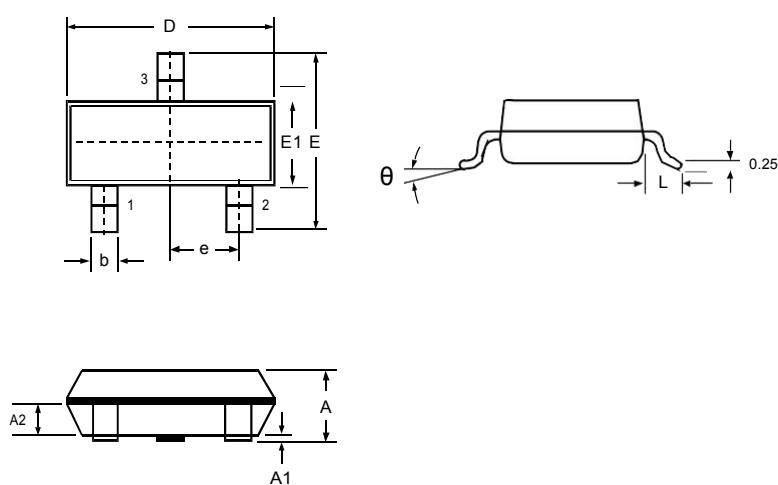

SYMBOL	DIMENSIONS			
	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
D	2.800	3.000	0.110	0.118
b	0.300	0.500	0.012	0.020
E	2.250	2.550	0.089	0.100
E1	1.200	1.400	0.047	0.055
e	0.950 BSC		0.037 BSC	
L	0.500	0.675	0.020	0.027
θ	0	8°	0	8°

Marking

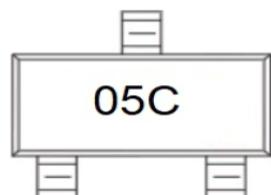

Ordering information

Order code	Package	Baseqty	Delivery mode
UMW LGSOT05CLT1G	SOT-23	3000	Tape and reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#) [E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)