


0.8A Single-Phase Glass Passivated Bridge Rectifiers

Rectifier Reverse Voltage 50 to 1000V

Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Ideal for surface mount application
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 30 amperes
- High temperature soldering guaranteed 265°C/10 seconds at 5 lbs (2.3kg) tension

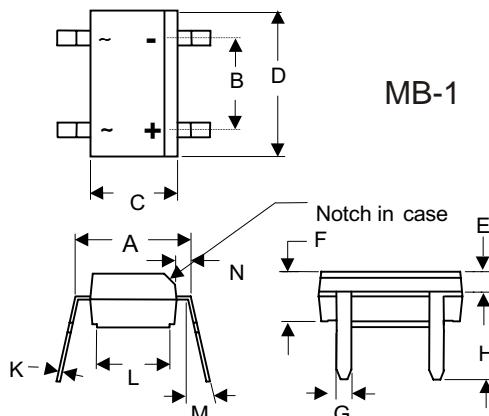

Mechanical Data

Case: Molded plastic

Terminals: Plated leads solderable per MIL-STD-202,
Method 208

Polarity: Marked on body

Mounting Position: Any

DIMENSIONS					NOTE
DIM	INC. HES		MM	MAX	
A	.195	.205	4.95	5.21	
B	.095	.105	2.41	2.67	
C	.144	.161	3.65	4.10	
D	.179	.190	4.55	4.83	
E	.039	.049	0.99	1.24	
F	.090	.106	2.30	2.70	
G	.017	.029	0.43	0.74	
H	.132	.148	3.35	3.75	
K	.006	.016	0.15	0.41	
L	.137	.147	3.48	3.73	
M	10°	15	10°	15°	
N	.020	.028	0.51	0.71	

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	MB05M	MB1M	MB2M	MB4M	MB6M	MB8M	MB10M	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C (*3)	IF(AV)				0.5				A
					0.8*				
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				30				A
Rating for fusing (t<8.3ms)	I ² t				10				A ² sec
Typical thermal resistance per element(1)	ReJA				110				°C /W
Typical junction capacitance per element (2)	C _j				25.0				pF
Operating junction and storage temperature range	T _J , T _{TSG}				-55 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	MB05M	MB1M	MB2M	MB4M	MB6M	MB8M	MB10M	Unit
Maximum instantaneous forward voltage drop per leg at 0.5A	VF				1.1				V
Maximum DC reverse current at rated TA =25 °C DC blocking voltage per element TA =125 °C	IR				10 500				μA

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.

(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

(3)R-load on aluminum substrate TA=25°C.

Rating and Characteristic Curves (TA=25°C Unless otherwise noted) **MB05M-MB10M**

Fig. 1 Derating Curve for Output Rectified Current

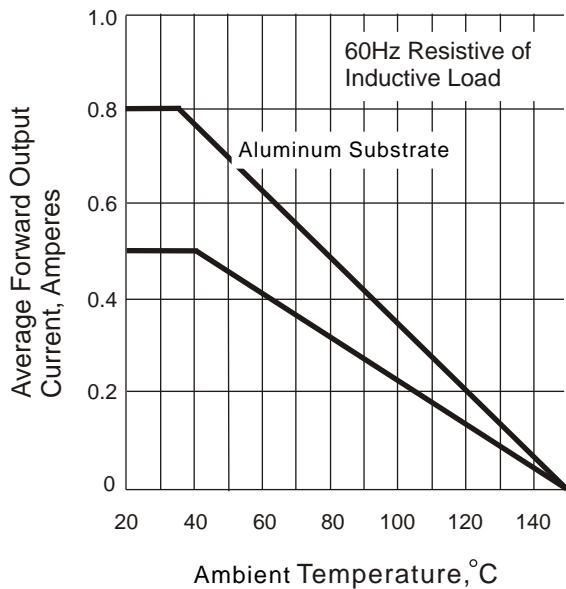


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

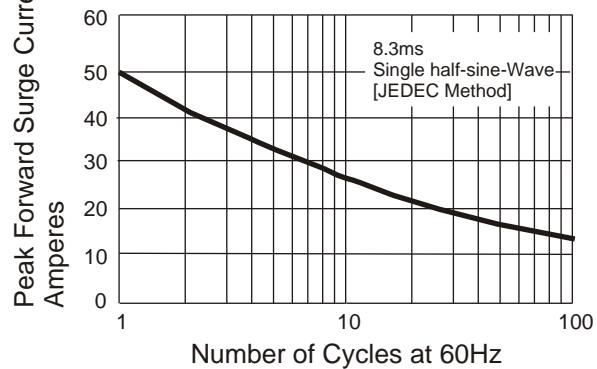


Fig. 3 Typical Instantaneous Forward Characteristics



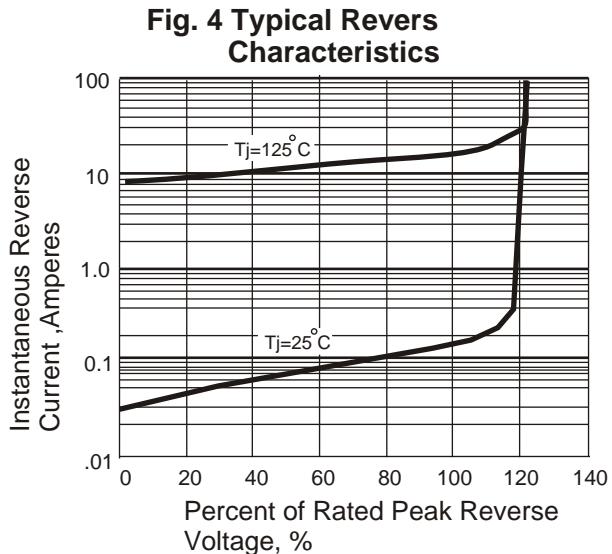


Fig. 5 Typical Junction Capacitance

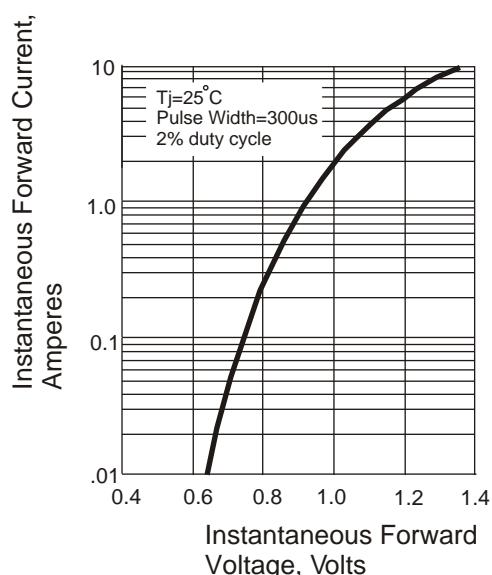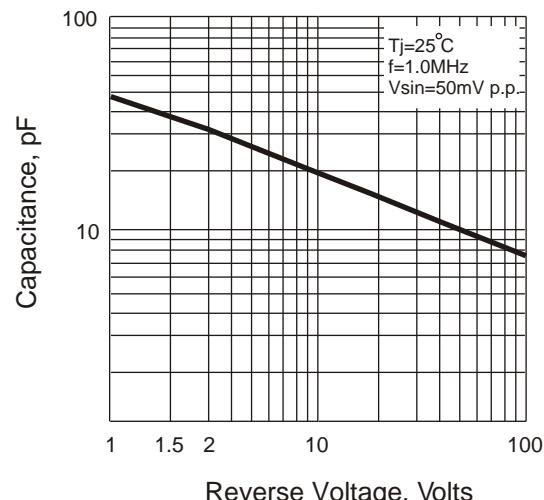

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Youtai manufacturer](#):

Other Similar products are found below :

[MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GSIB680-E3/45](#)
[DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [26MT120](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#)
[GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#)
[TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-60MT120KPBF](#) [DB105-BP](#) [DBF10TG](#) [DF1510S](#)