


General Description

Power SOT-223 P-Channel enhancement mode power field effect transistors especially tailored to minimize on-state resistance and provide superior switching performance. These devices are particularly suited for low voltage applications such as notebook computer power management and DC motor control.



Features

- $V_{DS}(V) = -30V$
- $I_D = -7.5A$ ($V_{GS} = -10V$)
- $R_{DS(ON)} < 30m\Omega$ ($V_{GS} = -10V$)
- $R_{DS(ON)} < 45m\Omega$ ($V_{GS} = -4.5V$)
- High density cell design for extremely low $R_{DS(ON)}$
- High power and current handling capability in a widely used surface mount package.

Absolute Maximum Ratings $T = 25^\circ C$ unless otherwise noted

Symbol	Parameter	NDT456P	Units
V_{DSS}	Drain-Source Voltage	-30	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Drain Current - Continuous (Note 1a)	± 7.5	A
	- Pulsed	± 20	
P_D	Maximum Power Dissipation (Note 1a)	3	W
	(Note 1b)	1.3	
	(Note 1c)	1.1	
T_J, T_{STG}	Operating and Storage Temperature Range	-65 to 150	$^\circ C$


THERMAL CHARACTERISTICS

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1a)	42	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case (Note 1)	12	$^\circ C/W$

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)



Symbol	Parameter	Conditions	Min	Typ	Max	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}} = -24 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			-1	μA
		$T_J = 55^\circ\text{C}$			-10	μA
I_{GSSF}	Gate - Body Leakage, Forward	$V_{\text{GS}} = 20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$			100	nA
I_{GSSR}	Gate - Body Leakage, Reverse	$V_{\text{GS}} = -20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$			-100	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	-1	-1.5	-3	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = -10 \text{ V}, I_D = -7.5 \text{ A}$		26	30	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5 \text{ V}, I_D = -6 \text{ A}$		41	45	
$I_{\text{D(on)}}$	On-State Drain Current	$V_{\text{GS}} = -10 \text{ V}, V_{\text{DS}} = -5 \text{ V}$	-20			A
		$V_{\text{GS}} = -4.5 \text{ V}, V_{\text{DS}} = -5 \text{ V}$	-10			
G_{fs}	Forward Transconductance	$V_{\text{GS}} = -10 \text{ V}, I_D = -7.5 \text{ A}$		13		S
C_{iss}	Input Capacitance	$V_{\text{DS}} = -15 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 1.0 \text{ MHz}$		1440		pF
C_{oss}	Output Capacitance			905		pF
C_{rss}	Reverse Transfer Capacitance			355		pF
$t_{\text{D(on)}}$	Turn - On Delay Time	$V_{\text{DD}} = -15 \text{ V}, I_D = -7 \text{ A}, V_{\text{GEN}} = -10 \text{ V}, R_{\text{GEN}} = 12 \Omega$		10	20	ns
t_r	Turn - On Rise Time			65	120	ns
$t_{\text{D(off)}}$	Turn - Off Delay Time			70	130	ns
t_f	Turn - Off Fall Time			70	130	ns
Q_g	Total Gate Charge	$V_{\text{DS}} = -10 \text{ V}, I_D = -7.5 \text{ A}, V_{\text{GS}} = -10 \text{ V}$		47	67	nC
Q_{gs}	Gate-Source Charge			5		nC
Q_{gd}	Gate-Drain Charge			12		nC
I_s	Maximum Continuous Drain-Source Diode Forward Current				-2.5	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{\text{GS}} = 0 \text{ V}, I_s = -2.5 \text{ A}$ (Note 2)		-0.85	-1.2	V
t_{rr}	Reverse Recovery Time	$V_{\text{GS}} = 0 \text{ V}, I_F = -2.5 \text{ A} \frac{dI_F}{dt} = 100 \text{ A}/\mu\text{s}$			140	ns

Notes:

1. $P_D(t) = \frac{T_J - T_A}{R_{\text{gJA}}(t)} = \frac{T_J - T_A}{R_{\text{gJC}} + R_{\text{gCA}}(t)} = I_D^2(t) \times R_{\text{DS(ON)}} @ T_J$ R_{gJA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as thesolder mounting surface of the drain pins. R_{gJC} is guaranteed by design while R_{gCA} is defined by users. For general reference: Applications on 4.5" x 5" FR-4 PCB under still air environment, typical R_{gJA} is found to be:a. 42°C when mounted on a 1 in² pad of 2oz copper.b. 95°C when mounted on a 0.066in² pad of 2oz copper.c. 110°C/W when mounted on a 0.00123in² pad of 2oz copper.

Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2.0%.



Typical Electrical Characteristics

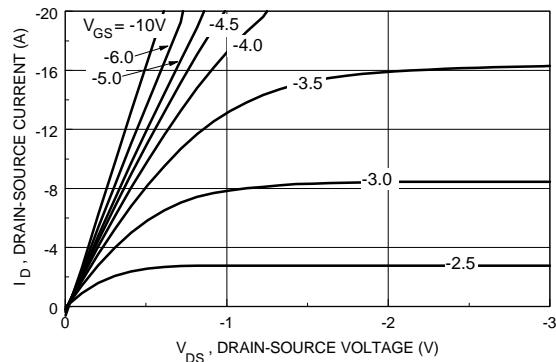


Figure 1. On-Region Characteristics.

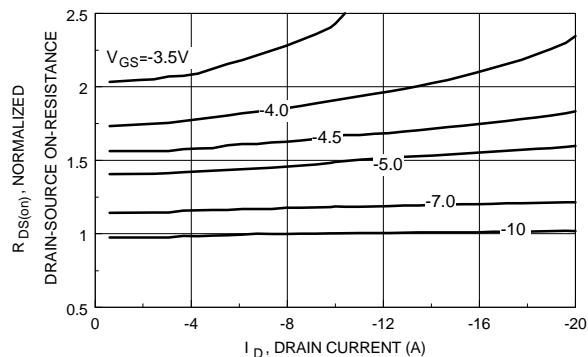


Figure 2. On-Resistance Variation with Gate Voltage and Drain Current.

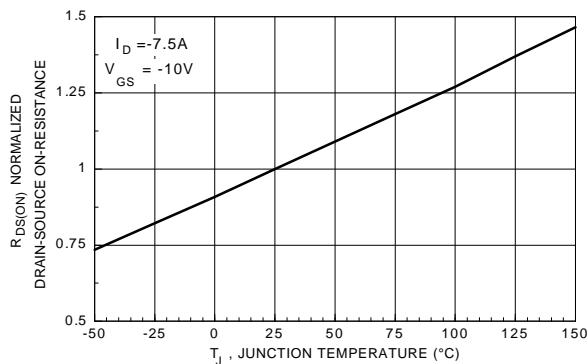


Figure 3. On-Resistance Variation with Temperature.

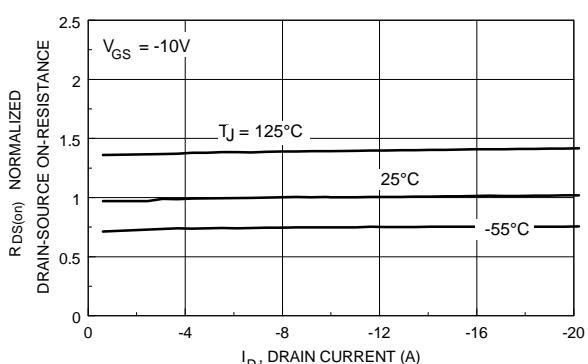


Figure 4. On-Resistance Variation with Drain Current and Temperature.

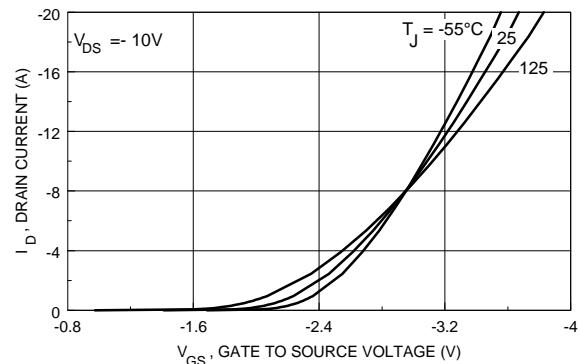


Figure 5. Transfer Characteristics.

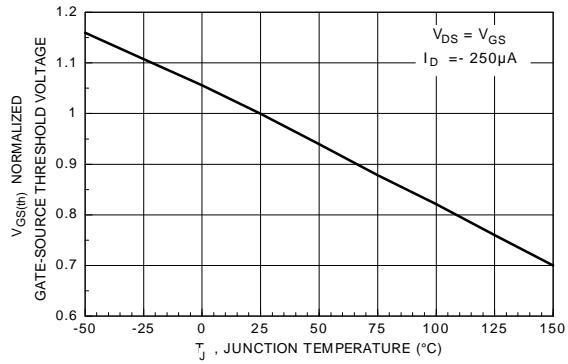


Figure 6. Gate Threshold Variation with Temperature.

Typical Electrical Characteristics

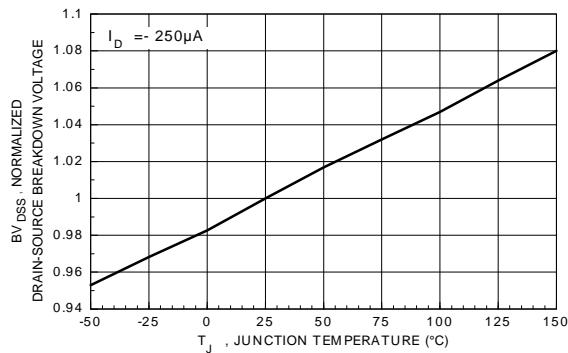


Figure 7. Breakdown Voltage Variation with Temperature.

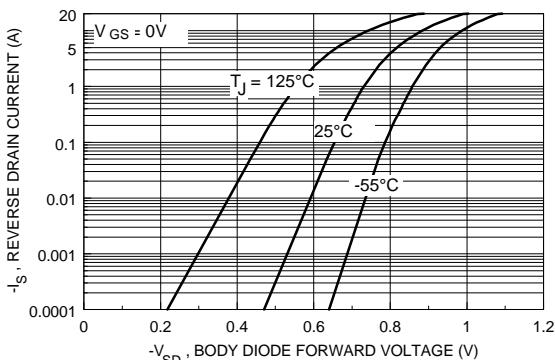


Figure 8. Body Diode Forward Voltage Variation with Current and Temperature.

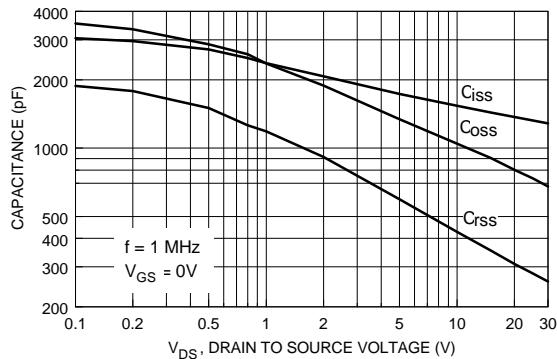


Figure 9. Capacitance Characteristics.

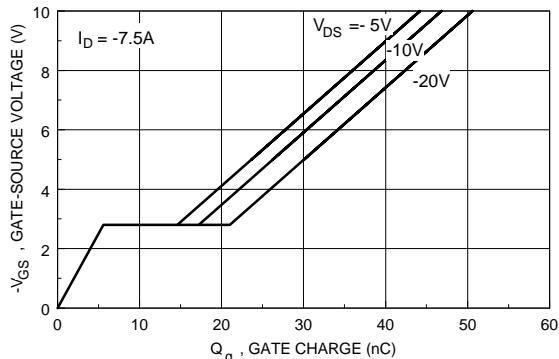


Figure 10. Gate Charge Characteristics.

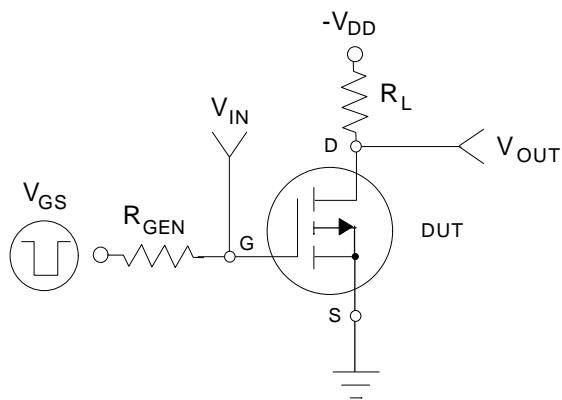


Figure 11. Switching Test Circuit.

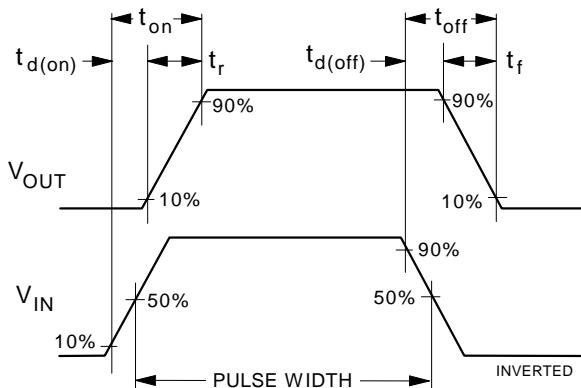


Figure 12. Switching Waveforms.

Typical Thermal Characteristics

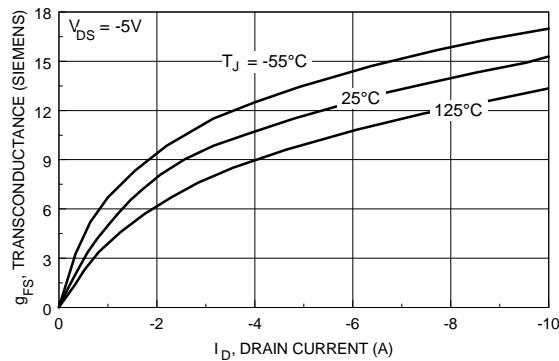


Figure 13. Transconductance Variation with Drain Current and Temperature.

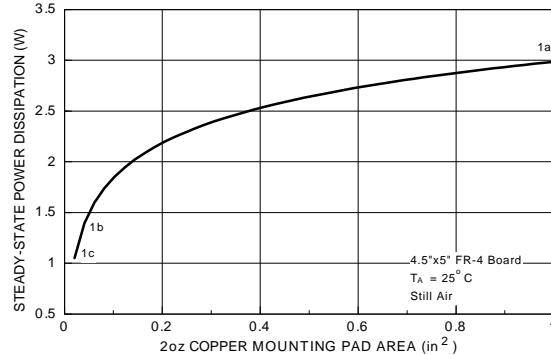


Figure 14. SOT-223 Maximum Steady-State Power Dissipation versus Copper Mounting Pad Area.

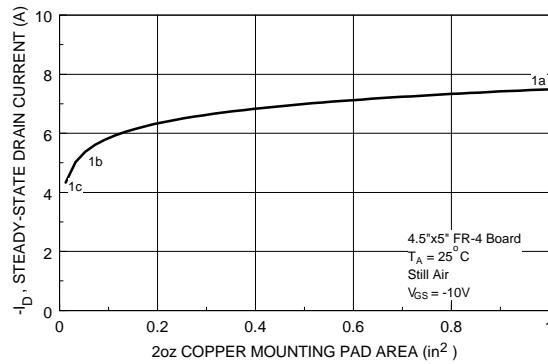


Figure 15. Maximum Steady-State Drain Current versus Copper Mounting Pad Area.

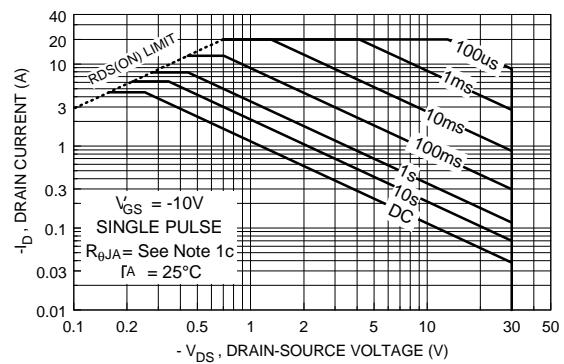


Figure 16. Maximum Safe Operating Area.


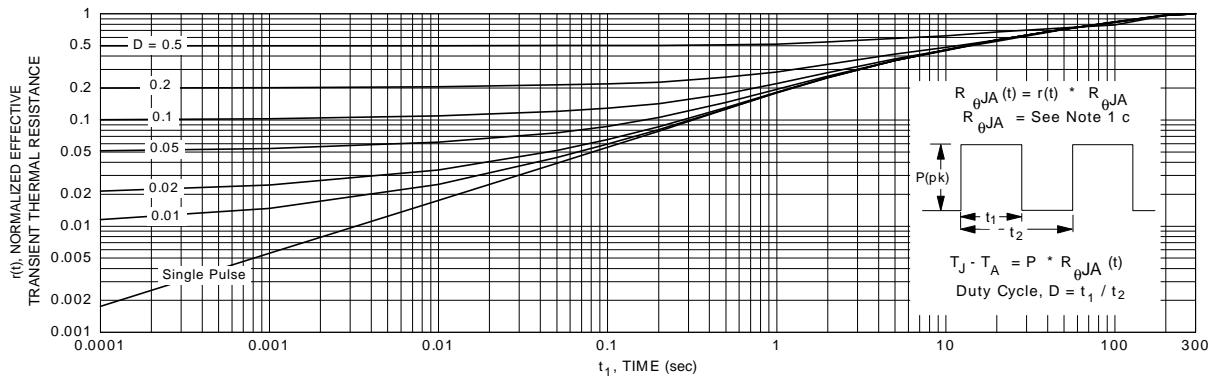


Figure 17. Transient Thermal Response Curve.


Note: Thermal characterization performed using the conditions described in note 1c. Transient thermal response will change depending on the circuit board design.

Package Dimensions

SOT-223

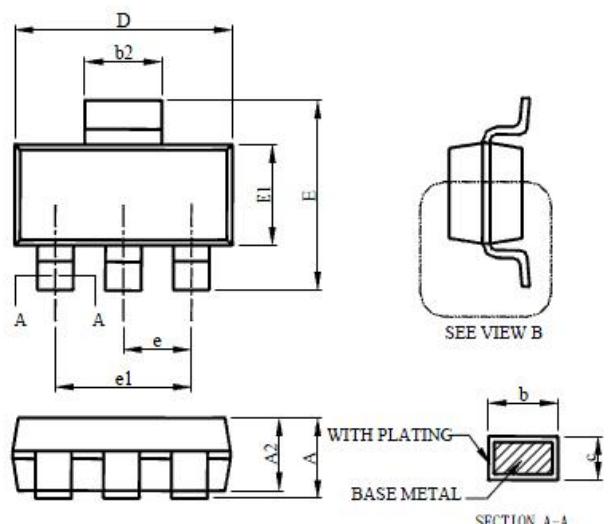

SYMBOL	SOT-223	
	MILLIMETERS	
	MIN.	MAX.
A		1.80
A1	0.02	0.10
A2	1.55	1.65
b	0.66	0.84
b2	2.90	3.10
c	0.23	0.33
D	6.30	6.70
E	6.70	7.30
E1	3.30	3.70
e	2.30 BSC	
e1	4.60 BSC	
L	0.90	
θ	0°	8°

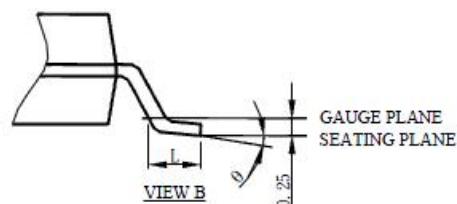

Note:

1. Refer to JEDEC TO-261AA.
2. Dimension D and E1 are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and interlead flash, but including any mismatch between the top and bottom of the plastic body.
3. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

Marking**Ordering information**

Order code	Package	Baseqty	Deliverymode
UMW NDT456P	SOT-223	2500	Tape and reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)