

DESCRIPTION

The small size and low power consumption ($34\mu A$ per channel maximum) of the OPA347 make it ideal for portable and battery-powered applications. The input range of the OPA347 extends 200mV beyond the rails, and the output range is within 5mV of the rails. The OPA347 also features an excellent speed/power ratio with a bandwidth of 350kHz.




The OPA347 can be operated with a single or dual power supply from 2.3V to 5.5V. All models are specified for operation from $-55^{\circ}C$ to $+125^{\circ}C$.

FEATURES

- LOW I_Q : $20\mu A$
- HIGH SPEED/POWER RATIO WITH BANDWIDTH: 350kHz
- RAIL-TO-RAIL INPUT AND OUTPUT
- SINGLE SUPPLY: 2.3V to 5.5V

APPLICATIONS

- PORTABLE EQUIPMENT
- BATTERY-POWERED EQUIPMENT
- 2-WIRE TRANSMITTERS
- SMOKE DETECTORS
- CO DETECTORS

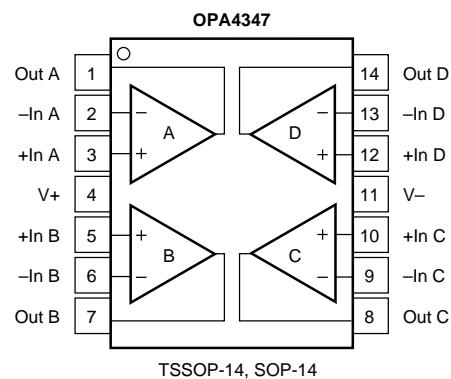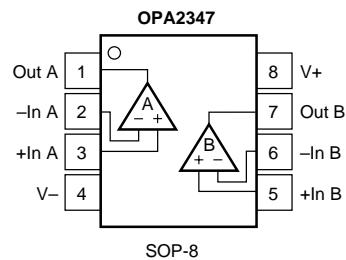







microPower, Rail-to-Rail Operational Amplifiers

ELECTRICAL CHARACTERISTICS: $V_S = 2.5V$ to $5.5V$ Boldface limits apply over the specified temperature range, $T_A = -55^{\circ}C$ to $+125^{\circ}C$.At $T_A = +25^{\circ}C$, $R_L = 100k\Omega$ connected to $V_S/2$ and $V_{OUT} = V_S/2$, unless otherwise noted.

PARAMETER	CONDITION	OPA347SA OPA2347UA, OPA4347EA, UA			UNITS
		MIN	TYP	MAX	
Input Offset Voltage V_{OS}	$V_S = 5.5V$, $V_{CM} = (V-) + 0.8V$		2	6	mV
over Temperature			2	7	mV
Drift dV_{OS}/dT			3		$\text{mV}/^{\circ}\text{C}$
vs Power Supply $PSRR$	$V_S = 2.5V$ to $5.5V$, $V_{CM} < (V+) - 1.7V$		60	175	dB/V
over Temperature	$V_S = 2.5V$ to $5.5V$, $V_{CM} < (V+) - 1.7V$			300	dB/V
Channel Separation, DC	$f = 1\text{kHz}$		0.3		$\mu\text{V}/V$
			128		dB
Common-Mode Voltage Range V_{CM}		$(V-) - 0.2$		$(V+) + 0.2$	V
Common-Mode Rejection Ratio $CMRR$	$V_S = 5.5V$, $(V-) - 0.2V < V_{CM} < (V+) - 1.7V$	70	80		dB
over Temperature	$V_S = 5.5V$, $(V-) - 0.2V < V_{CM} < (V+) - 1.7V$	66			dB
	$V_S = 5.5V$, $(V-) - 0.2V < V_{CM} < (V+) + 0.2V$	54	70		dB
over Temperature	$V_S = 5.5V$, $(V-) - 0.2V < V_{CM} < (V+) + 0.2V$	48			dB
Input Bias Current I_b			± 0.5	± 10	pA
Input Offset Current I_{OS}			± 0.5	± 10	pA
Differential			$10^{13} \parallel 3$		$\Omega \parallel pF$
Common-Mode			$10^{13} \parallel 6$		$\Omega \parallel pF$
NOISE	$V_{CM} < (V+) - 1.7V$				
Input Voltage Noise, $f = 0.1\text{Hz}$ to 10Hz			12		μV_{PP}
Input Voltage Noise Density, $f = 1\text{kHz}$ e_n			60		$n\text{V}/\sqrt{\text{Hz}}$
Input Current Noise Density, $f = 1\text{kHz}$ i_n			0.7		$f\text{A}/\sqrt{\text{Hz}}$
Open-Loop Voltage Gain A_{OL}	$V_S = 5.5V$, $R_L = 100k\Omega$, $0.015V < V_O < 5.485V$	100	115		dB
over Temperature	$V_S = 5.5V$, $R_L = 100k\Omega$, $0.015V < V_O < 5.485V$	88			dB
	$V_S = 5.5V$, $R_L = 5k\Omega$, $0.125V < V_O < 5.375V$	100	115		dB
over Temperature	$V_S = 5.5V$, $R_L = 5k\Omega$, $0.125V < V_O < 5.375V$	88			dB
A_{OL} (SC-70 only)	$V_S = 5.5V$, $R_L = 5k\Omega$, $0.125V < V_O < 5.375V$	96	115		dB
Voltage Output Swing from Rail	$R_L = 100k\Omega$, $A_{OL} > 100\text{dB}$		5	15	mV
over Temperature	$R_L = 100k\Omega$, $A_{OL} > 88\text{dB}$			15	mV
	$R_L = 5k\Omega$, $A_{OL} > 100\text{dB}$		90	125	mV
over Temperature	$R_L = 5k\Omega$, $A_{OL} > 88\text{dB}$			125	mV
Short-Circuit Current I_{SC}			± 17		mA
Capacitive Load Drive C_{LOAD}		See Typical Characteristics			
FREQUENCY RESPONSE	$C_L = 100\text{pF}$				
Gain-Bandwidth Product GBW			350		kHz
Slew Rate SR	$G = +1$		0.17		$\text{V}/\mu\text{s}$
Settling Time, 0.1% t_S	$V_S = 5V$, 2V Step, $G = +1$		21		μs
0.01%	$V_S = 5V$, 2V Step, $G = +1$		27		μs
Overload Recovery Time	$V_{IN} \times \text{Gain} = V_S$		23		μs
Specified Voltage Range V_S		2.5		5.5	V
Minimum Operating Voltage			2.3		V
Minimum Operating Voltage (OPA347SA)			2.4		V
Quiescent Current (per amplifier) I_Q	$I_Q = 0$		20	34	μA
over Temperature				38	μA
Specified Range		-55		125	$^{\circ}\text{C}$
Operating Range		-65		150	$^{\circ}\text{C}$
Storage Range		-65		150	$^{\circ}\text{C}$
Thermal Resistance θ_{JA}					
SOT23-5 Surface-Mount		200			$^{\circ}\text{C}/\text{W}$
SOT23-8 Surface-Mount		150			$^{\circ}\text{C}/\text{W}$
SO-8 Surface-Mount		150			$^{\circ}\text{C}/\text{W}$
SO-14 Surface-Mount		100			$^{\circ}\text{C}/\text{W}$
TSSOP-14 Surface-Mount		100			$^{\circ}\text{C}/\text{W}$
DIP-8		100			$^{\circ}\text{C}/\text{W}$
SC70-5 Surface-Mount		250			$^{\circ}\text{C}/\text{W}$
WCSP		250			$^{\circ}\text{C}/\text{W}$







TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = +5\text{V}$, and $R_L = 100\text{k}\Omega$ connected to $V_S/2$, unless otherwise noted.

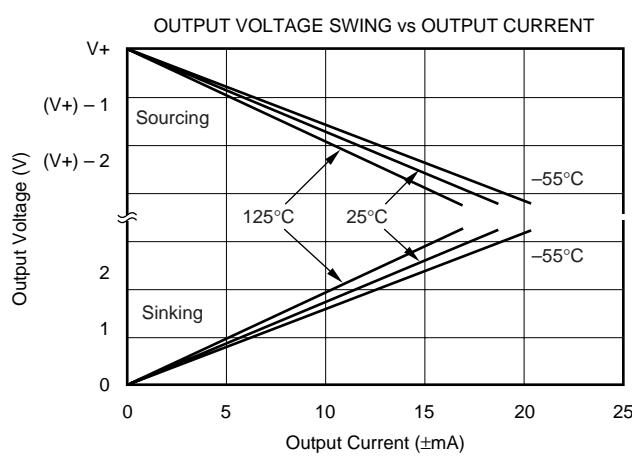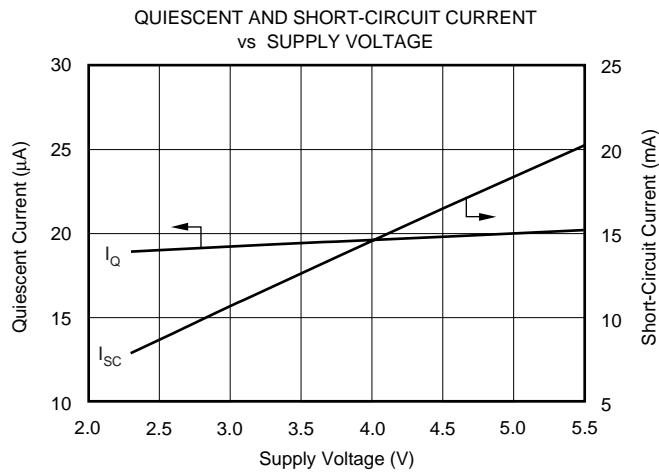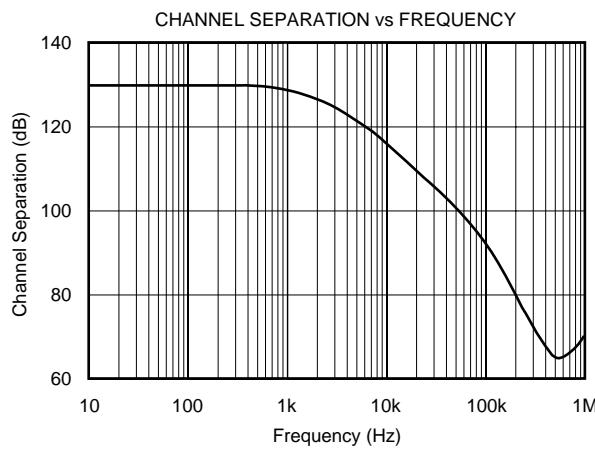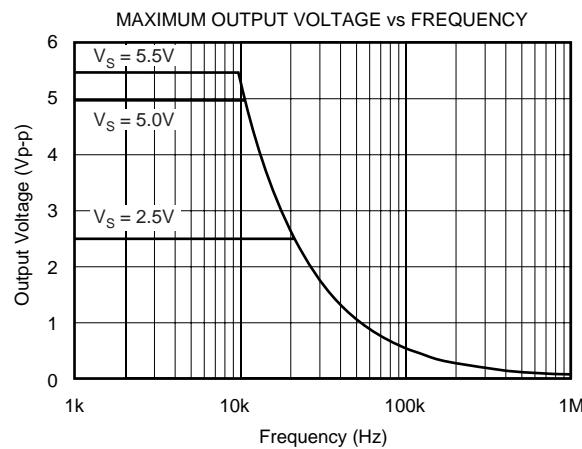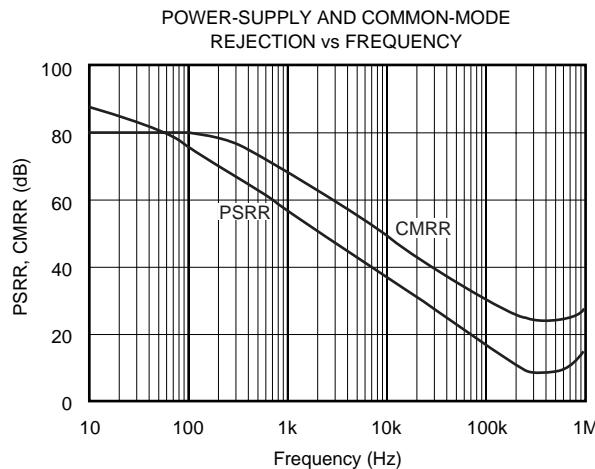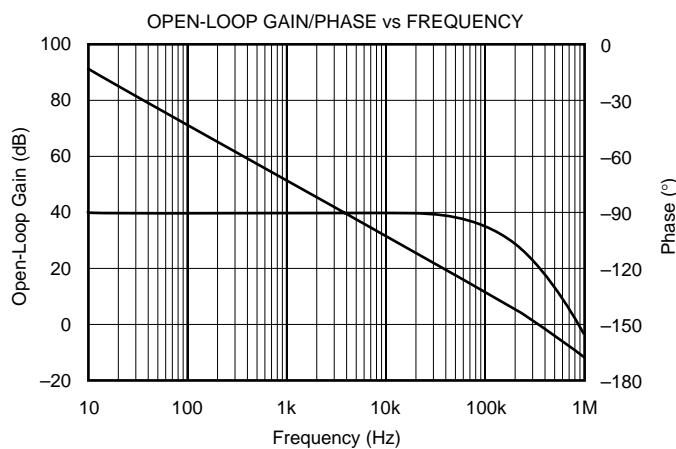







TYPICAL CHARACTERISTICS(Cont.)

At $T_A = +25^\circ\text{C}$, $V_S = +5\text{V}$, and $R_L = 100\text{k}\Omega$ connected to $V_S/2$, unless otherwise noted.

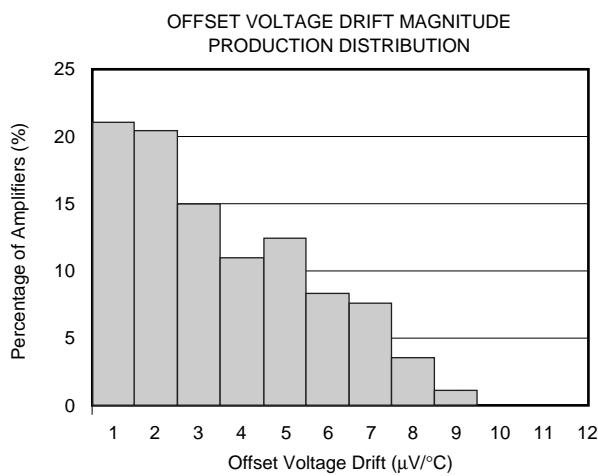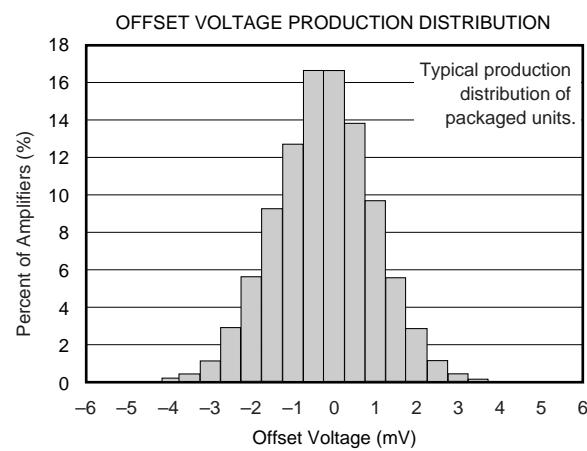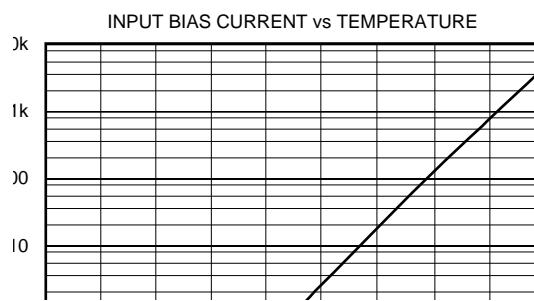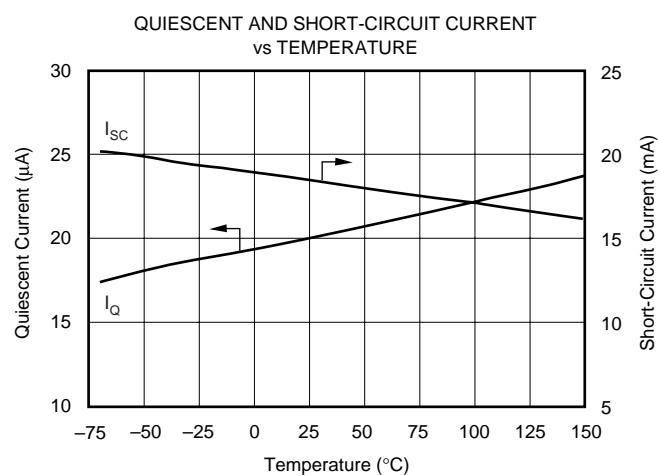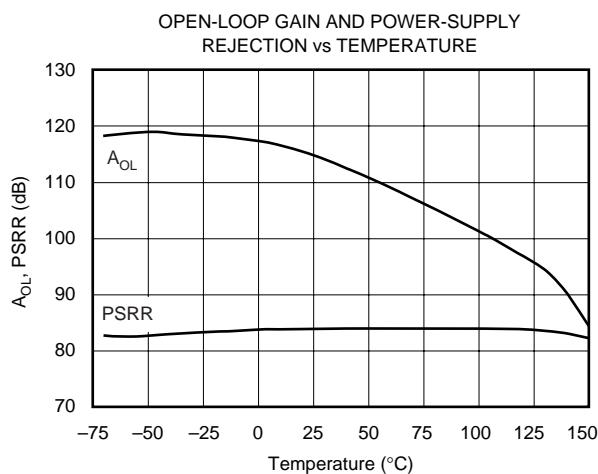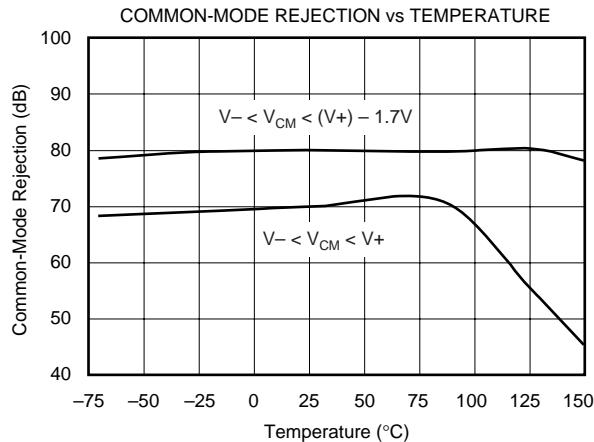


TYPICAL CHARACTERISTICS (Cont.)

At $T_A = +25^\circ\text{C}$, $V_S = +5\text{V}$, and $R_L = 100\text{k}\Omega$ connected to $V_S/2$, unless otherwise noted.

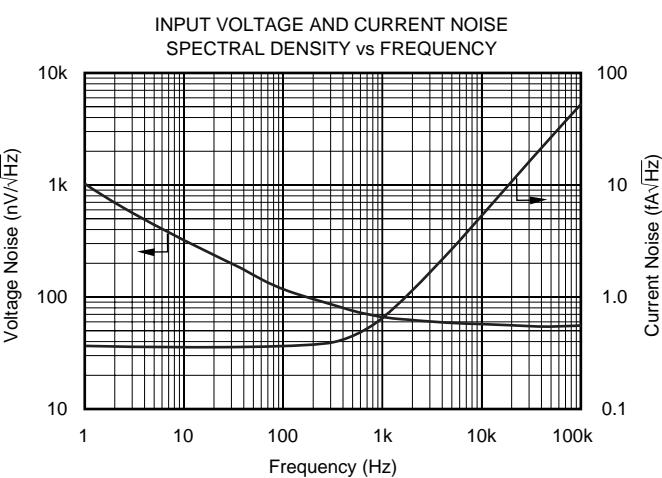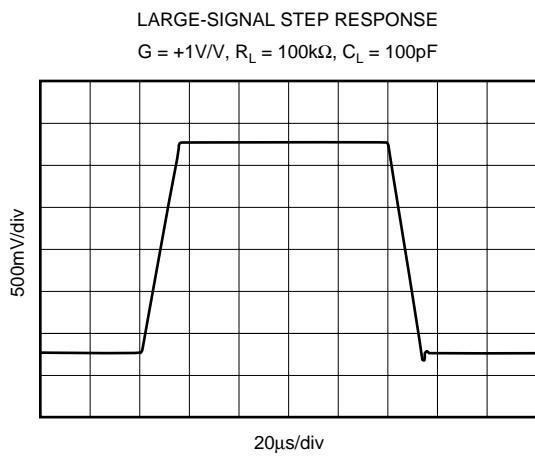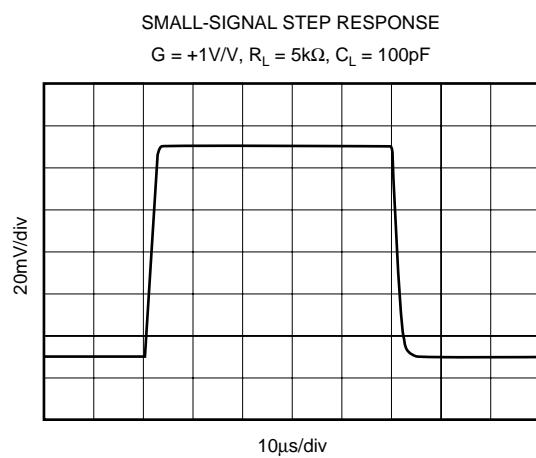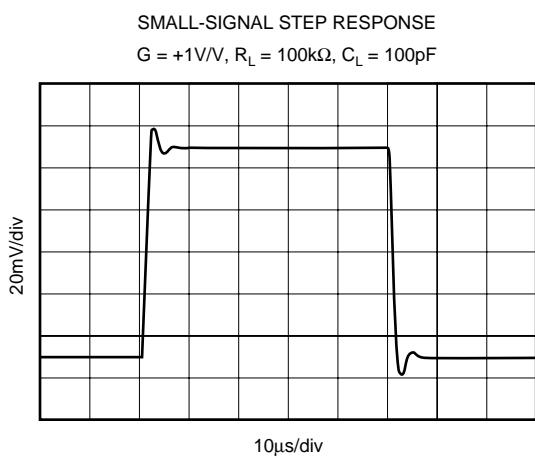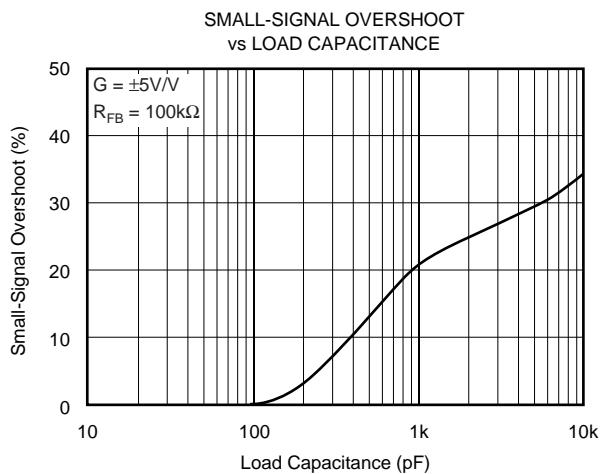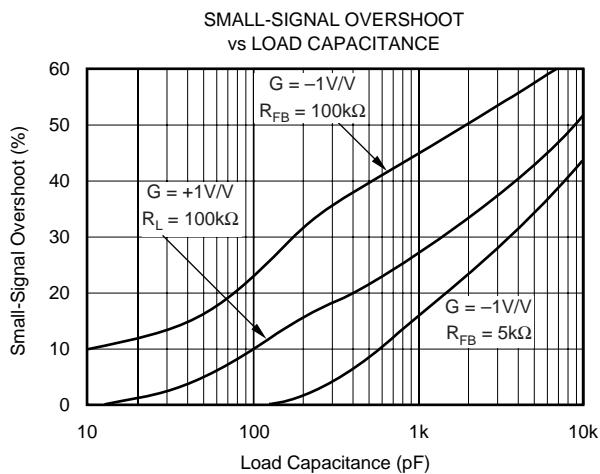


Package Dimension

SC70-5 (SOT353)

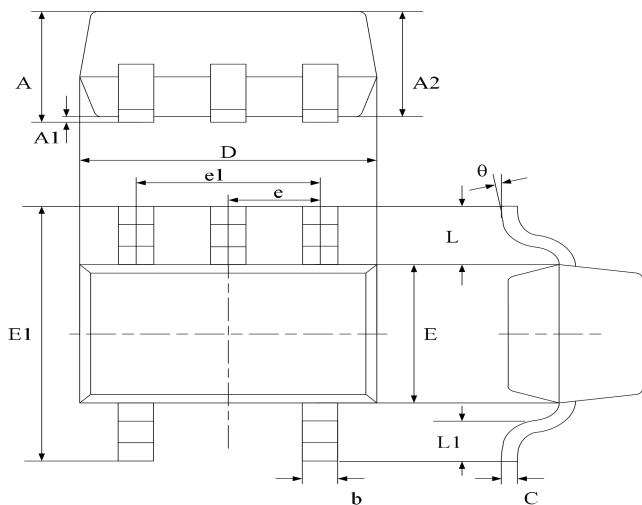


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.035	0.039
b	0.150	0.350	0.006	0.014
C	0.080	0.150	0.003	0.006
D	1.8500	2.150	0.079	0.087
E	1.100	1.400	0.045	0.053
E1	1.950	2.200	0.085	0.096
e	0.850 typ.		0.026 typ.	
el	1.200	1.400	0.047	0.055
L	0.42 ref.		0.021 ref.	
L1	0.260	0.460	0.010	0.018
theta	0°	8°	0°	8°

SOP-14

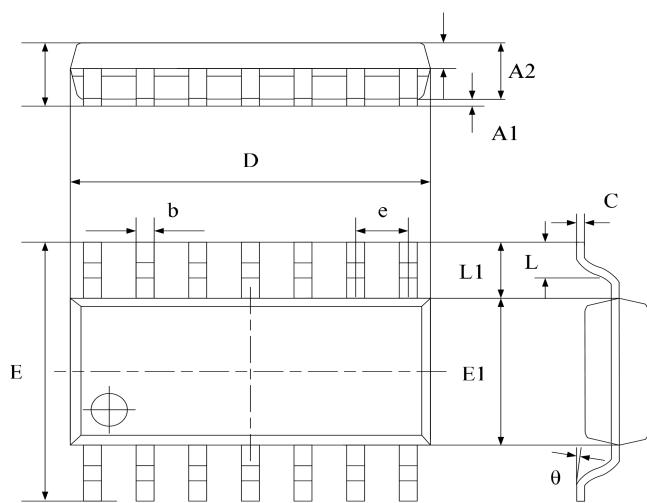


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.450	1.850	0.059	0.076
A1	0.100	0.300	0.004	0.012
A2	1.350	1.550	0.055	0.063
A3	0.550	0.750	0.022	0.031
b	0.406typ.		0.017typ.	
C	0.203typ.		0.008typ.	
D	8.630	8.830	0.352	0.360
E	5.840	6.240	0.238	0.255
E1	3.850	4.050	0.157	0.165
e	1.270 typ.		0.050 typ.	
L	1.040 ref.		0.041 ref.	
L1	0.350	0.750	0.014	0.031
theta	2°	8°	2°	8°

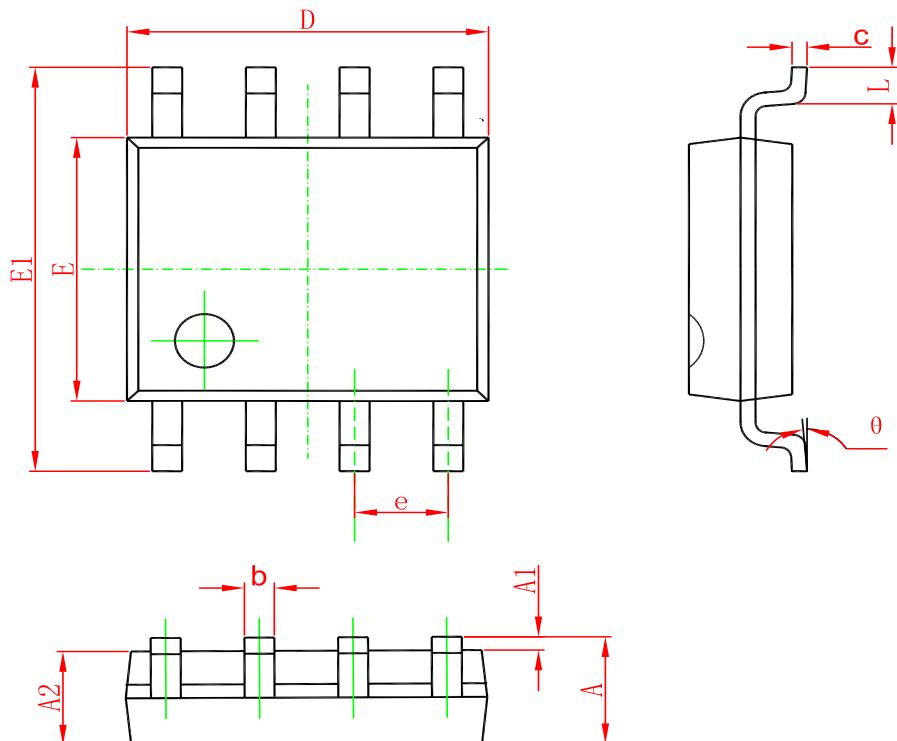SOP-8

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

TSSOP-14

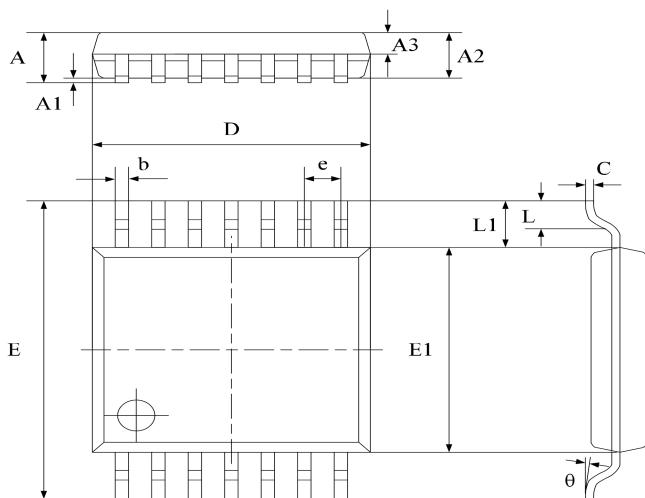

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	-	1.200	-	0.0472
A1	0.050	0.150	0.002	0.006
A2	0.900	1.050	0.037	0.043
A3	0.390	0.490	0.016	0.020
b	0.200	0.290	0.008	0.012
C	0.130	0.180	0.005	0.007
D	4.860	5.060	0.198	0.207
E	6.200	6.600	0.253	0.269
E1	4.300	4.500	0.176	0.184
e	0.650 typ.		0.0256 typ.	
L1	1.000 ref.		0.0393 ref.	
L	0.450	0.750	0.018	0.031
θ	0°	8°	0°	8°

Ordering information

Order code	Package	Baseqty	Deliverymode	Marking
UMW OPA347SA	SC70-5	3000	Tape and reel	S47 U
UMW OPA4347UA	SOP-14	2500	Tape and reel	OPA4347UA
UMW OPA2347UA	SOP-8	2500	Tape and reel	OPA2347UA
UMW OPA4347EA	TSSOP-14	4000	Tape and reel	OPA4347EA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[430227FB](#) [LT1678IS8](#) [NCV33202DMR2G](#) [NJM324E](#) [M38510/13101BPA](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#)
[AZV358MMTR-G1](#) [SCY33178DR2G](#) [NCV20034DR2G](#) [NTE778S](#) [NTE871](#) [NTE937](#) [NJU7057RB1-TE2](#) [SCY6358ADR2G](#)
[NJM2904CRB1-TE1](#) [UPC4570G2-E1-A](#) [UPC4741G2-E1-A](#) [UPC4574GR-9LG-E1-A](#) [NJM8532RB1-TE1](#) [EL2250CS](#) [EL5100IS](#) [EL5104IS](#)
[EL5127CY](#) [EL5127CYZ](#) [EL5133IW](#) [EL5152IS](#) [EL5156IS](#) [EL5162IS](#) [EL5202IY](#) [EL5203IY](#) [EL5204IY](#) [EL5210CS](#) [EL5210CYZ](#)
[EL5211IYE](#) [EL5220CY](#) [EL5223CLZ](#) [EL5223CR](#) [EL5224ILZ](#) [EL5227CLZ](#) [EL5227CRZ](#) [EL5244CS](#) [EL5246CS](#) [EL5246CSZ](#) [EL5250IY](#)
[EL5251IS](#) [EL5257IS](#) [EL5260IY](#) [EL5261IS](#)