


## Features

- 280W peak pulse power ( $t_p = 8/20\mu s$ )
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2  $\pm 30kV$  contact  $\pm 30kV$  air
- IEC 61000-4-4 (EFT) 40A(5/50ns)
- IEC 61000-4-5(Lightning) 6A(8/20 $\mu s$ )



## Applications

- Dataline
- Automatic Teller Machines
- Net works
- Power line

## Mechanical Data

- SOT-23 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

## Absolute Maximum Rating

| Rating   | Symbol    | Value        | Units       |
|--|-----------|--------------|-------------|
| Peak Pulse Power ( $t_p = 8/20\mu s$ )                         | $P_{pp}$  | 280          | W           |
| Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)               | $I_{pp}$  | 6            | A           |
| ESD per IEC 61000-4-2 (Air)<br>ESD per IEC 61000-4-2 (Contact) | $V_{ESD}$ | 30<br>30     | kV          |
| Lead Soldering Temperature                                     | $T_L$     | 260/10S      | $^{\circ}C$ |
| Junction Temperature   | $T_J$     | -55 to + 125 | $^{\circ}C$ |
| Storage Temperature  | $T_{stg}$ | -55 to + 125 | $^{\circ}C$ |

## Electrical Characteristics

| Parameter                 | Symbol    | Conditions                  | Min  | Typical | Max  | Units   |
|---------------------------|-----------|-----------------------------|------|---------|------|---------|
| Reverse Stand-Off Voltage | $V_{RWM}$ |                             |      |         | 24.0 | V       |
| Reverse Breakdown Voltage | $V_{BR}$  | $I_T=1mA$                   | 26.7 | 30.0    | 34.0 | V       |
| Reverse Leakage Current   | $I_R$     | $V_{RWM}=24V, T=25^\circ C$ |      | 0.1     | 0.5  | $\mu A$ |
| Peak Pulse Current        | $I_{PP}$  | $t_p=8/20\mu s$             |      |         | 6    | A       |
| Clamping Voltage          | $V_C$     | $I_{PP}=6A, t_p=8/20\mu s$  |      |         | 48   | V       |
| Junction Capacitance      | $C_j$     | $V_R=0V, f=1MHz$            |      | 12      | 15   | pF      |

## Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

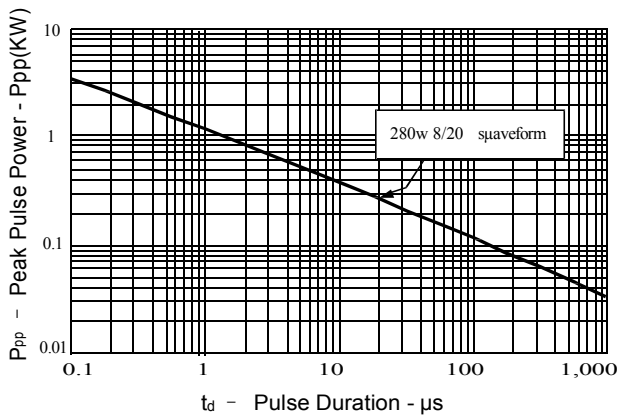


Figure 2: Power Derating Curve

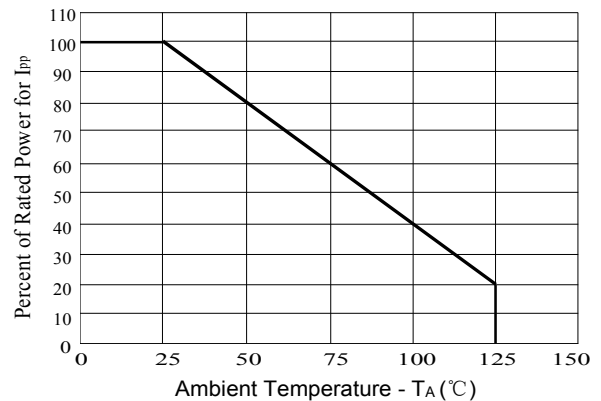


Figure3: Pulse Waveform



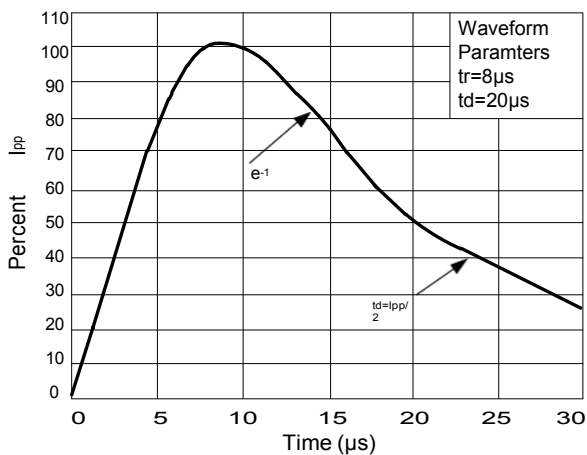


Figure 4: Clamping Voltage vs.Ipp

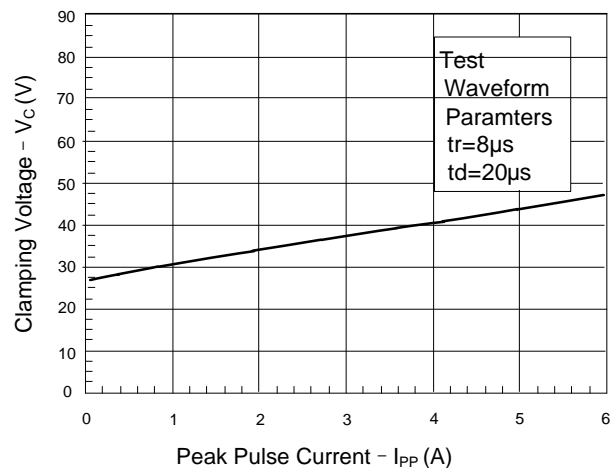


### Outline Drawing – SOT-23

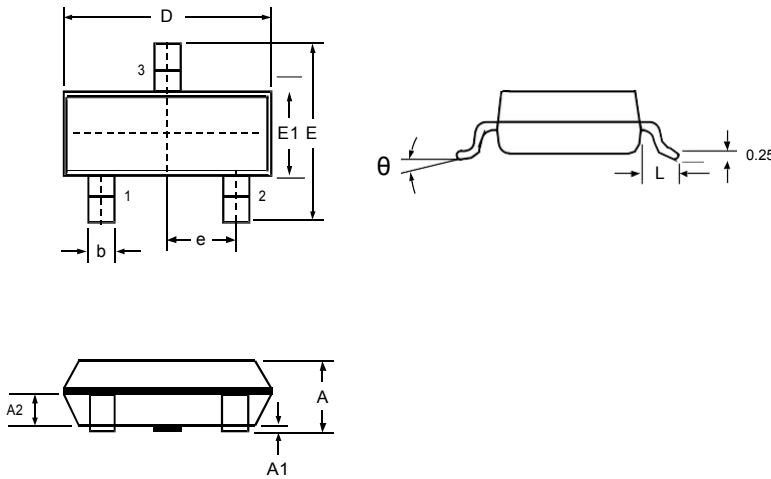

| SYMBOL | DIMENSIONS |       |           |       |
|--------|------------|-------|-----------|-------|
|        | MILLIMETER |       | INCHES    |       |
|        | MIN        | MAX   | MIN       | MAX   |
| A      | 0.900      | 1.150 | 0.035     | 0.045 |
| A1     | 0.000      | 0.100 | 0.000     | 0.004 |
| A2     | 0.900      | 1.050 | 0.035     | 0.041 |
| D      | 2.800      | 3.000 | 0.110     | 0.118 |
| b      | 0.300      | 0.500 | 0.012     | 0.020 |
| E      | 2.250      | 2.550 | 0.089     | 0.100 |
| E1     | 1.200      | 1.400 | 0.047     | 0.055 |
| e      | 0.950 BSC  |       | 0.037 BSC |       |
| L      | 0.300      | 0.500 | 0.012     | 0.020 |
| θ      | 0          | 8°    | 0         | 8°    |

### Marking



### Ordering information

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Youtai](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)