


Description

Low capacitance unidirectional fivefold ElectroStatic Discharge (ESD) protection diode arrays in small Surface-Mounted Device (SMD) plastic packages designed to protect up to five unidirectional signal lines from the damage caused by ESD and other transients.

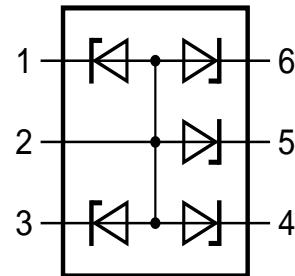

Features

- ESD protection of up to five lines
- Low diode capacitance
- Max. peak pulse power: $P_{PP} = 25 \text{ W}$
- Low clamping voltage: $V_{CL} = 12 \text{ V}$
- Ultra low leakage current: $I_{RM} = 5 \text{ nA}$
- ESD protection up to 20 kV
- IEC 61000-4-2; level 4 (ESD)
- IEC 61000-4-5 (surge); $I_{PP} = 2.5 \text{ A}$

Applications

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- Communication systems
- Portable electronics
- Subscriber Identity Module (SIM) card protection

Quick reference data

Quick reference data

$T_{amb} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Per diode						
V_{RWM}	reverse standoff voltage				3.3	V
	PESD3V3L5UF		-	-		
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		-	-	5.0	V
	PESD5V0L5UV					
	PESD5V0L5UY					
C_d	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$				
	PESD3V3L5UF		-	22	28	pF
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		-	16	19	pF
	PESD5V0L5UV					
	PESD5V0L5UY					

Limiting values

Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
Per diode					
P _{PP}	peak pulse power	t _p = 8/20 µs	[1][2]	-	25 W
I _{PP}	peak pulse current	t _p = 8/20 µs	[1][2]	-	2.5 A
Per device					
T _j	junction temperature		-	150	°C
T _{amb}	ambient temperature		-65	+150	°C
T _{stg}	storage temperature		-65	+150	°C

[1] Non-repetitive current pulse 8/20 µs exponential decay waveform according to IEC 61000-4-5.

[2] Measured from pin 1, 3, 4, 5 or 6 to pin 2.

ESD maximum ratings

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Max	Unit
Per diode					
V _{ESD}	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1][2]	-	20 kV
		MIL-STD-883 (human body model)	-	10	kV

[1] Device stressed with ten non-repetitive ESD pulses.

[2] Measured from pin 1, 3, 4, 5 or 6 to pin 2.

ESD standards compliance

Standard	Conditions
Per diode	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV

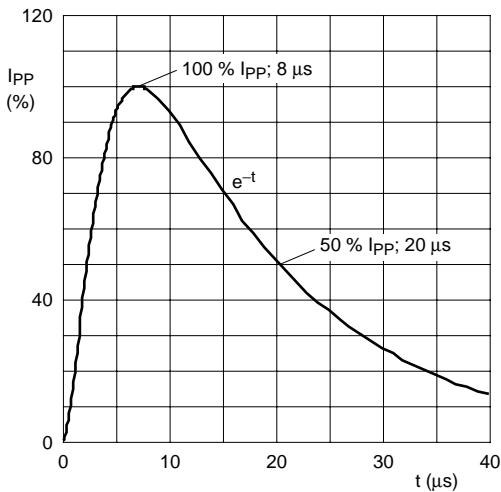


Fig 1. 8/20 μ s pulse waveform according to IEC 61000-4-5

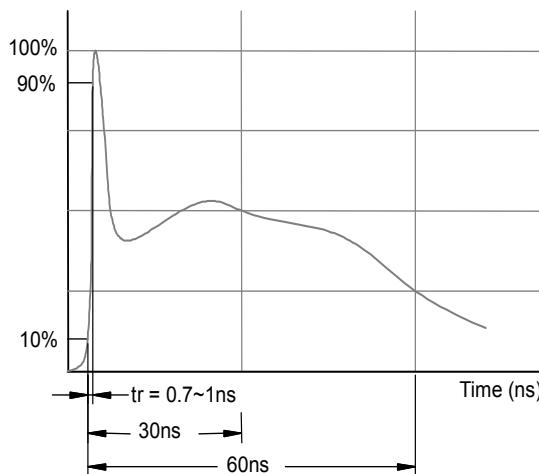


Fig 2. ESD pulse waveform according to IEC 61000-4-2

Characteristics

Characteristics

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Per diode						
V _{RWM}	reverse standoff voltage					
	PESD3V3L5UF		-	-	3.3	V
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		-	-	5.0	V
	PESD5V0L5UV					
	PESD5V0L5UY					
I _{RM}	reverse leakage current					
	PESD3V3L5UF	V _{RWM} = 3.3 V	-	75	300	nA
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF	V _{RWM} = 5.0 V	-	5	25	nA
	PESD5V0L5UV					
	PESD5V0L5UY					
V _{BR}	breakdown voltage	I _R = 1 mA				
	PESD3V3L5UF		5.3	5.6	5.9	V
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		6.4	6.8	7.2	V
	PESD5V0L5UV					
	PESD5V0L5UY					

Characteristics ...continued
 $T_{amb} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
C_d	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$				
	PESD3V3L5UF		-	22	28	pF
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		-	16	19	pF
	PESD5V0L5UV					
	PESD5V0L5UY					
V_{CL}	clamping voltage		[1][2]			
	PESD3V3L5UF	$I_{PP} = 1 \text{ A}$	-	-	10	V
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD3V3L5UF	$I_{PP} = 2.5 \text{ A}$	-	-	12	V
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF	$I_{PP} = 1 \text{ A}$	-	-	10	V
	PESD5V0L5UV					
	PESD5V0L5UY					
	PESD5V0L5UF	$I_{PP} = 2.5 \text{ A}$	-	-	12	V
	PESD5V0L5UV					
	PESD5V0L5UY					
r_{dif}	differential resistance	$I_R = 1 \text{ mA}$				
	PESD3V3L5UF		-	-	200	Ω
	PESD3V3L5UV					
	PESD3V3L5UY					
	PESD5V0L5UF		-	-	100	Ω
	PESD5V0L5UV					
	PESD5V0L5UY					

[1] Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.

[2] Measured from pin 1, 3, 4, 5 or 6 to pin 2.

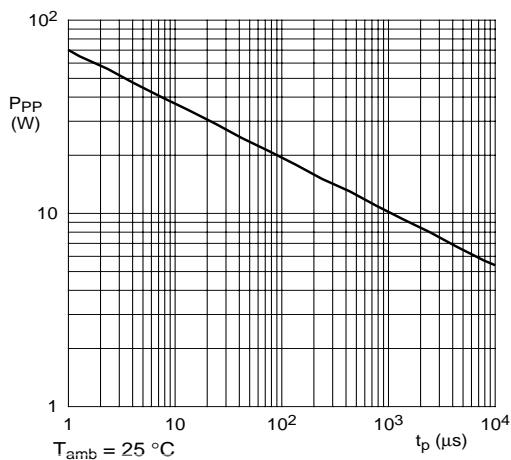


Fig 3. Peak pulse power as a function of exponential pulse duration; typical values

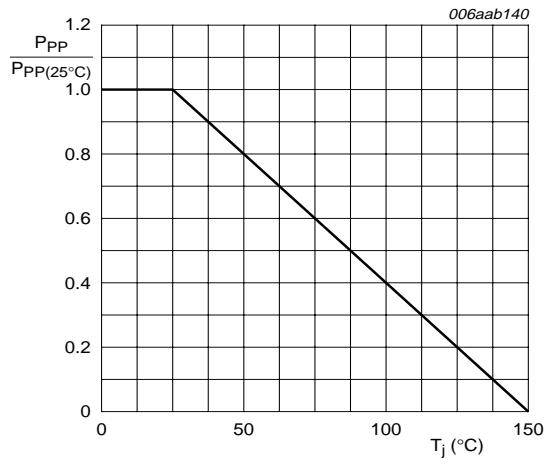


Fig 4. Relative variation of peak pulse power as a function of junction temperature; typical values

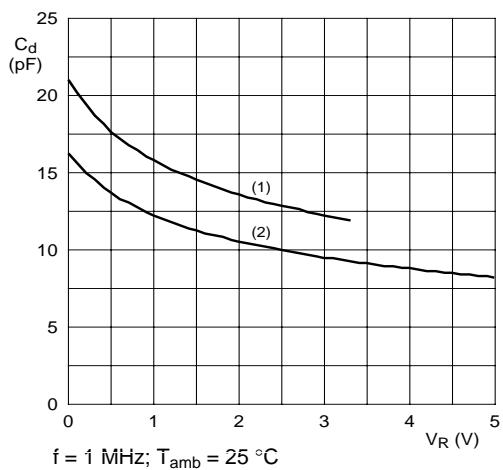


Fig 5. Diode capacitance as a function of reverse voltage; typical values

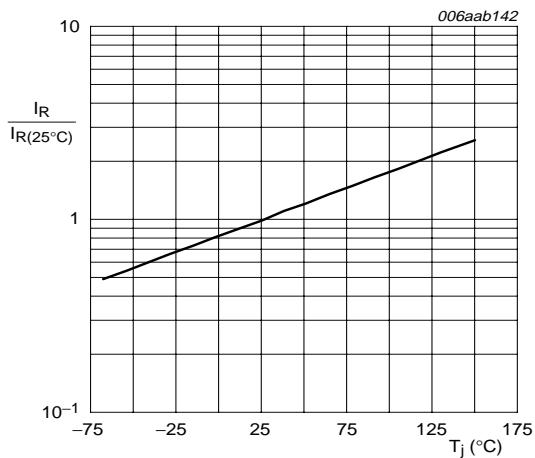


Fig 6. Relative variation of reverse current as a function of junction temperature; typical values





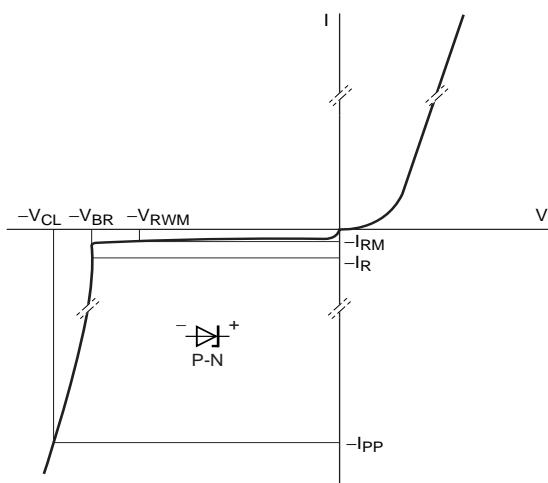






Fig 7. V-I characteristics for a unidirectional ESD protection diode

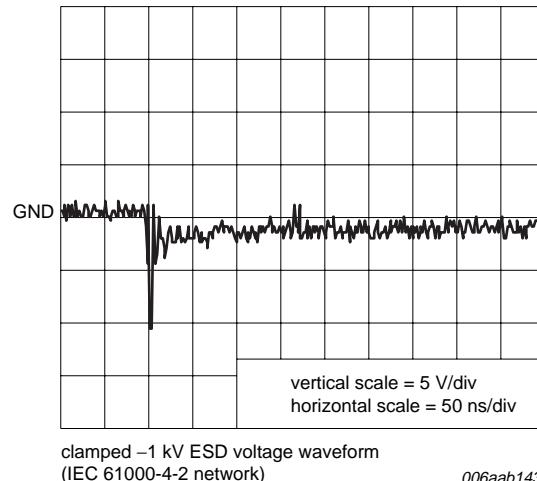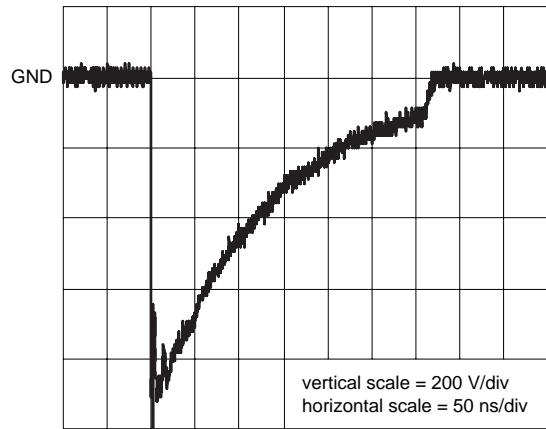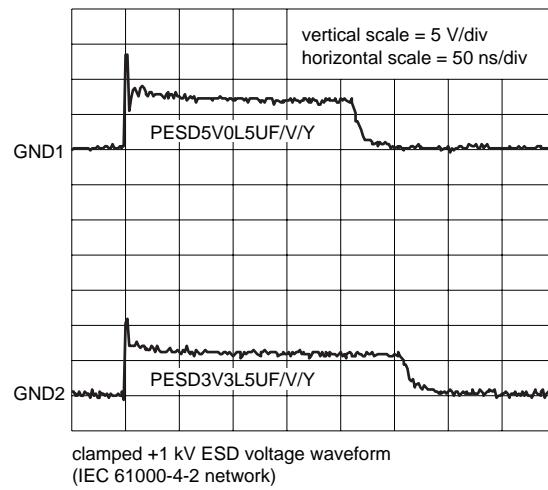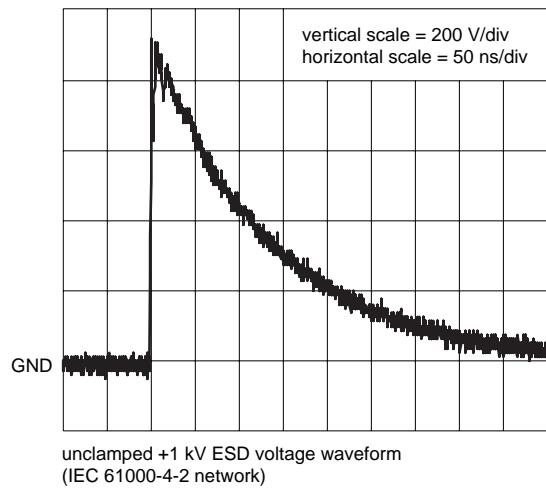

006aab143


Fig 8. ESD clamping test setup and waveforms

SOT-886/SOT-666/SOT-363 PACKAGE OUTLINE DIMENSIONS

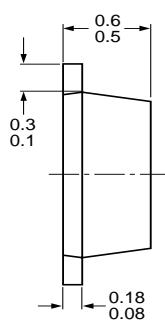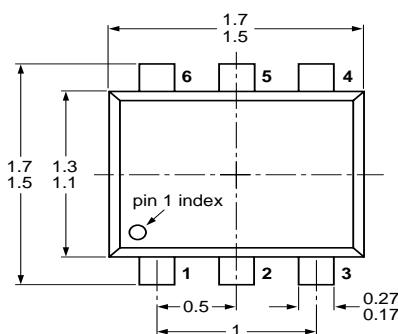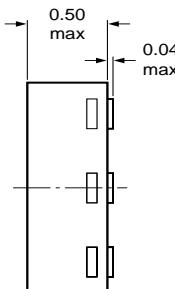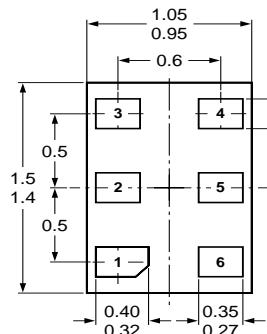

PESDxL5UF (SOT886)


PESDxL5UV (SOT666)

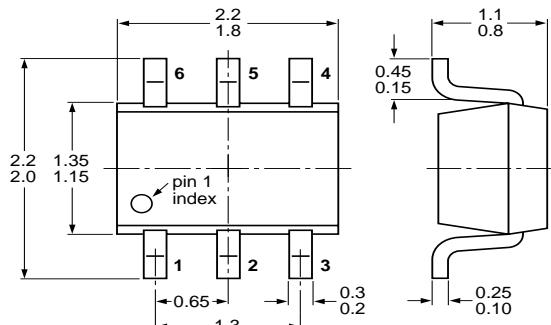

06-03-16


PESDxL5UY (SOT363/SC-88)

Marking




1.*代表周期

SOT-886



SOT-666

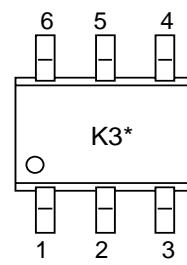

SOT-363

Ordering information

Order code	Marking code	Package	Baseqty	Delivery mode
UMW PESD3V3L5UF	A1	SOT-886	5000	Tape and reel
UMW PESD5V0L5UF	A2	SOT-886	5000	Tape and reel
UMW PESD3V3L5UV	E1	SOT-666	4000	Tape and reel
UMW PESD5V0L5UV	E2	SOT-666	4000	Tape and reel
UMW PESD3V3L5UY	K3*	SOT-363	3000	Tape and reel
UMW PESD5V0L5UY	K4*	SOT-363	3000	Tape and reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)