



## Description

Low capacitance ElectroStatic Discharge (ESD) protection diodes in ultra small SMD plastic packages designed to protect one signal line from the damage caused by ESD and other transients.

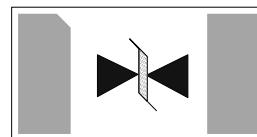

SOD-882

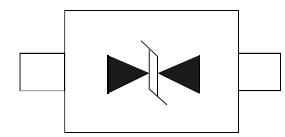

SOD-323/523

## Features

- Bidirectional ESD protection of one line
- Max. peak pulse power:  $P_{PP} = 130 \text{ W}$
- Low clamping voltage:  $V_{(CL)R} = 14 \text{ V}$
- Ultra low leakage current:  $I_{RM} = 5 \text{ nA}$
- ESD protection > 30 kV
- IEC 61000-4-2, level 4 (ESD)
- IEC 61000-4-5 (surge);  $I_{PP} = 12 \text{ A}$
- Ultra small SMD plastic packages

## Applications

- Cellular handsets and accessories
- Portable electronics
- Computers and peripherals
- Communication systems
- Audio and video equipment

## Quick reference data

### Quick reference data

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{RWM}$	reverse stand-off voltage		-	-	5	V
$C_d$	diode capacitance	$V_R = 0 \text{ V};$ $f = 1 \text{ MHz}$	-	35	45	pF

## Limiting values

### Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
<b>Per diode</b>					
$P_{PP}$	peak pulse power	8/20 $\mu$ s	[1][2]	-	130 W
$I_{PP}$	peak pulse current	8/20 $\mu$ s	[1][2]	-	12 A
$T_j$	junction temperature		-	150 $^{\circ}$ C	
$T_{amb}$	ambient temperature		-65	+150	$^{\circ}$ C
$T_{stg}$	storage temperature		-65	+150	$^{\circ}$ C

[1] Non-repetitive current pulse 8/20  $\mu$ s exponentially decaying waveform according to IEC61000-4-5; see [Figure 1](#).

[2] Measured from pin 1 to pin 2.

### ESD maximum ratings

Symbol	Parameter	Conditions	Min	Max	Unit
ESD	electrostatic discharge capability	IEC 61000-4-2 (contact discharge) HBM MIL-Std 883	[1][2]	-	30 kV
			-	10	kV

[1] Measured from pin 1 to pin 2.

[2] Device stressed with ten non-repetitive ElectroStatic Discharge (ESD) pulses; see [Figure 2](#).

### ESD standards compliance

#### Standard


IEC 61000-4-2, level 4 (ESD); [Figure 2](#)

HBM MIL-STD 883; class 3


#### Conditions

> 15 kV (air); > 8 kV (contact)

> 4 kV

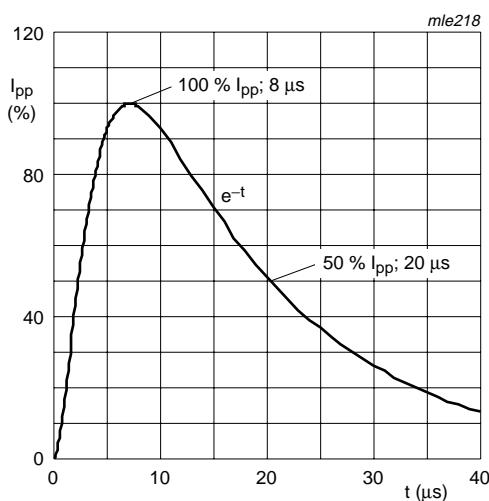

**Fig 1.** 8/20  $\mu$ s pulse waveform according to IEC 61000-4-5

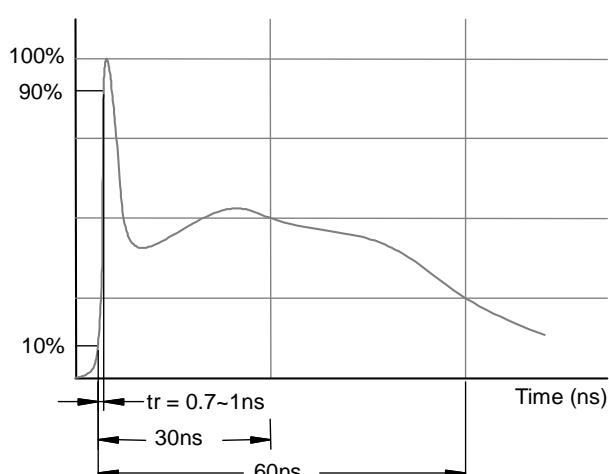

**Fig 2.** ElectroStatic Discharge (ESD) pulse waveform according to IEC 61000-4-2

## Characteristics


### Characteristics

T<sub>amb</sub>= 25°C unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Per diode</b>						
V <sub>RWM</sub>	reverse stand-off voltage		-	-	5	V
I <sub>RM</sub>	reverse leakage current	V <sub>RWM</sub> = 5 V; see <u>Figure 6</u>	-	5	100	nA
V <sub>(CL)R</sub>	clamping voltage	I <sub>PP</sub> = 1 A I <sub>PP</sub> = 12 A	[1][2]	-	10	V
V <sub>(BR)</sub>	breakdown voltage	I <sub>R</sub> = 1 mA	5.5	-	9.5	V
r <sub>dif</sub>	differential resistance	I <sub>R</sub> = 1 mA	-	-	50	Ω
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 0 V; f = 1 MHz; see <u>Figure 5</u>	-	35	45	pF


[1] Non-repetitive current pulse 8/20 µs exponentially decaying waveform according to IEC61000-4-5; see Figure 1.

[2] Measures from pin 1 to pin 2.

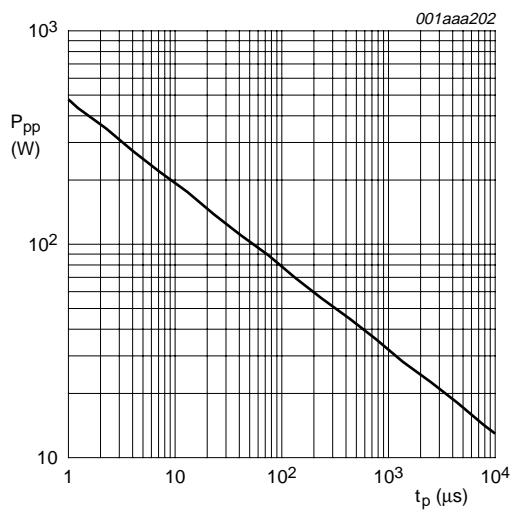


T<sub>amb</sub> = 25 °C

**Fig 3. Peak pulse power dissipation as a function of exponential time duration t<sub>p</sub>; typical values**

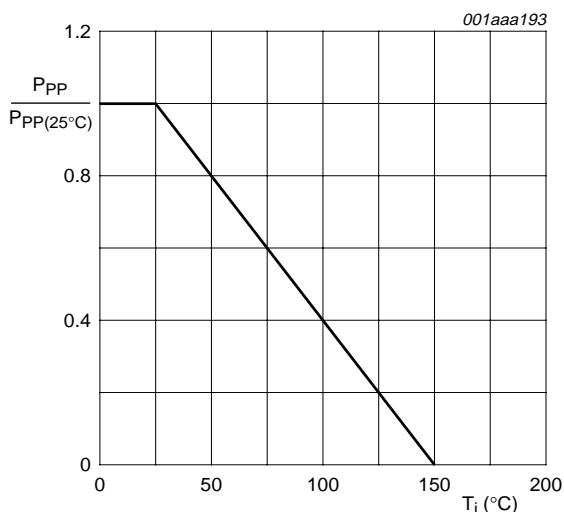


**Fig 4. Relative variation of peak pulse power as a function of junction temperature; typical values**




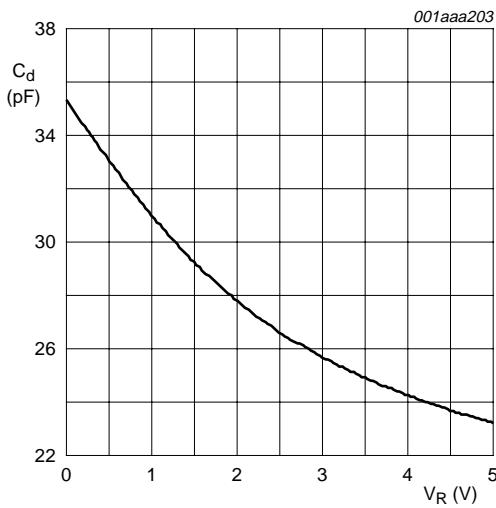


$T_{amb} = 25^{\circ}\text{C}$ ;  $f = 1\text{ MHz}$

**Fig 5. Diode capacitance as a function of reverse voltage; typical values**

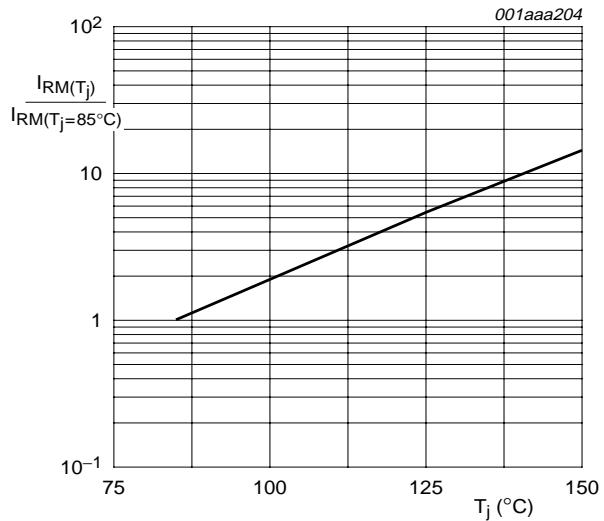


**Fig 6. Relative variation of reverse leakage current as a function of junction temperature; typical**

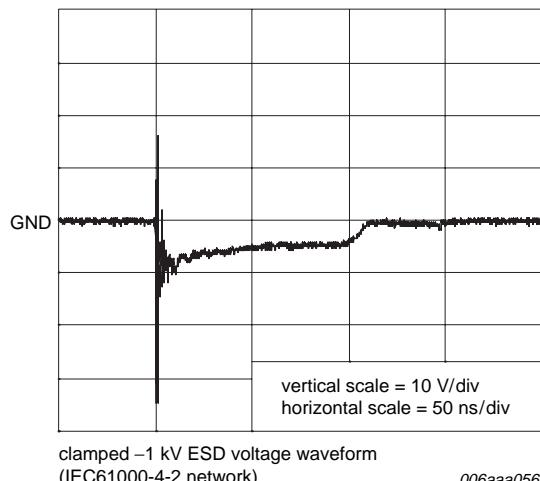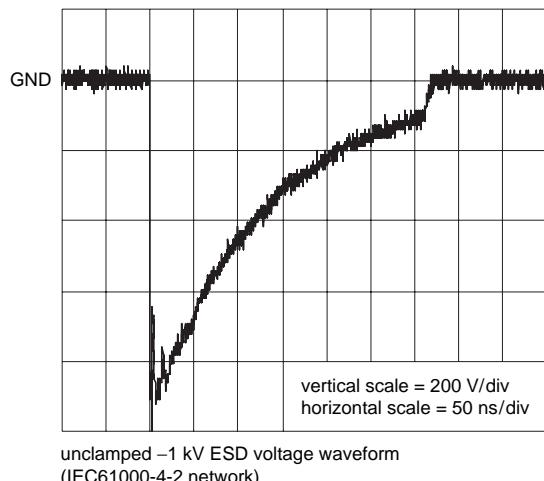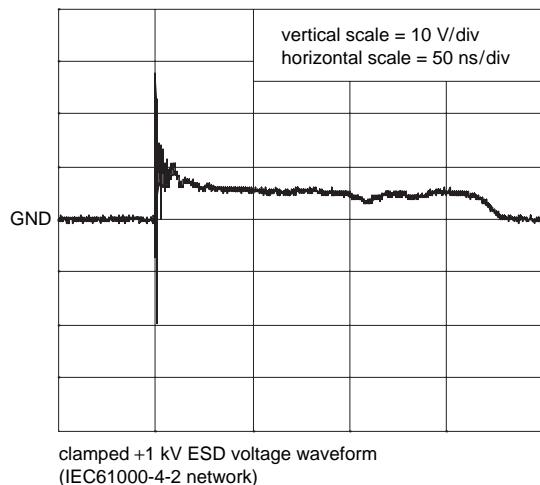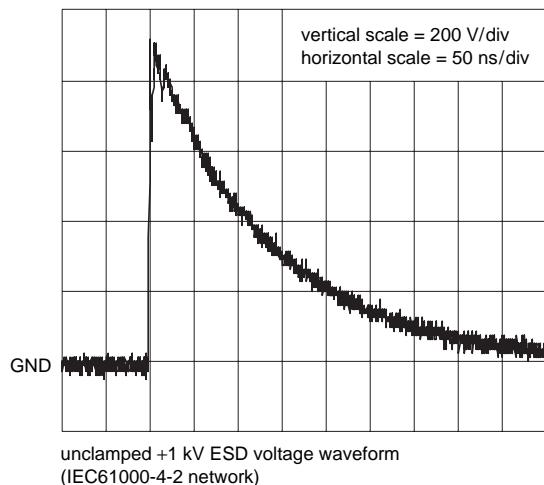


006aaa056

**Fig 7. ESD clamping test setup and waveforms**

## SOD-323/SOD-523/SOD-882 PACKAGE OUTLINE DIMENSIONS

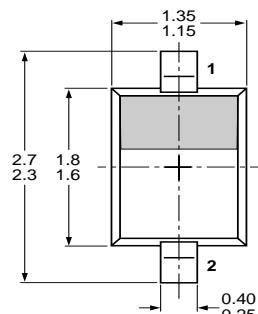


Dimensions in mm

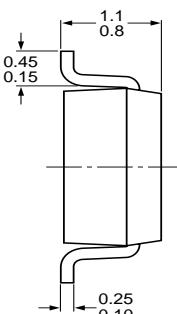


 03-12-17

PESD5V0S1BA(SOD-323)

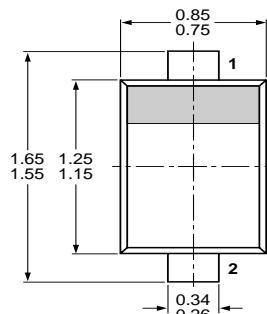


Dimensions in mm

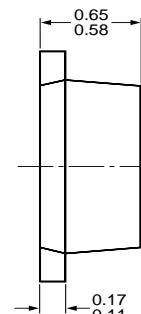


 02-12-13

PESD5V0S1BB(SOD-523)

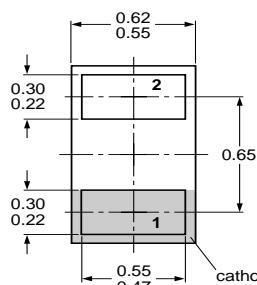


Dimensions in mm



 03-04-17

PESD5V0S1BL(SOD-882)

## Marking

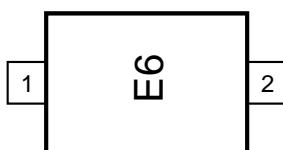

## Ordering information

Order code	Marking code	package	Baseqty	Delivermode
UMW PESD5V0S1BA	E6	SOD-323	3000	Tape and reel
UMW PESD5V0S1BB	L7	SOD-523	3000	Tape and reel
UMW PESD5V0S1BL	F1	SOD-882	10000	Tape and reel

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Youtai manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)  
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SM1605E3/TR13](#)  
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#) [E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)