
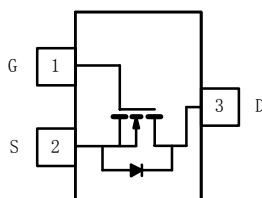


■ Features

- $V_{DS} (V) = 20V$
- $I_D = 6 A (V_{GS} = 4.5V)$
- $R_{DS(ON)} < 26m\Omega (V_{GS} = 4.5V)$
- $R_{DS(ON)} < 33m\Omega (V_{GS} = 2.5V)$
- $R_{DS(ON)} < 50m\Omega (V_{GS} = 1.8V)$

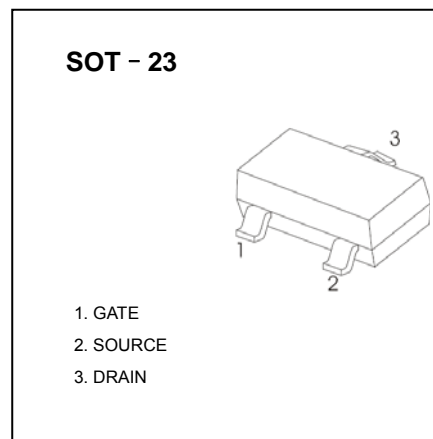

■ Absolute Maximum Ratings  $T_a = 25^\circ C$

Parameter	Symbol	5 sec	Steady State	Unit	
Drain-Source Voltage	$V_{DS}$	20		V	
Gate-Source Voltage	$V_{GS}$	$\pm 8$			
Continuous Drain Current *1	$I_D$	$T_a = 25^\circ C$	6	5	A
		$T_a = 70^\circ C$	5	4	
Pulsed Drain Current *2	$I_{DM}$	15			
Avalanche Current *2	$I_{AS}$	15		mJ	
Single Avalanche Energy	$E_{AS}$	11.25			
Power Dissipation *1	$P_D$	$T_a = 25^\circ C$	1.25	0.75	W
		$T_a = 70^\circ C$	0.8	0.48	
Thermal Resistance.Junction- to-Ambient *1 $t \leq 5$ sec	$R_{thJA}$	100		$^\circ C/W$	
		Steady State			
Thermal Resistance.Junction-to-Foot	$R_{thJF}$	50			
Junction Temperature	$T_J$	150		$^\circ C$	
Storage Temperature Range	$T_{stg}$	-55 to 150			

\*1 Surface Mounted on 1" x 1" FR4 Board.

\*2 Pulse width limited by maximum junction temperature


■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V <sub>DSS</sub>	I <sub>D</sub> =250 μ A, V <sub>GS</sub> =0V	20			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =20V, V <sub>GS</sub> =0V			1	μ A
		V <sub>DS</sub> =20V, V <sub>GS</sub> =0V, Ta=70°C			75	
Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±8V			±100	nA
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250 μ A	0.45	0.65	0.85	V
On-State Drain Current *1	I <sub>D(on)</sub>	V <sub>DS</sub> ≥ 10 V, V <sub>GS</sub> = 4.5 V	15			A
Static Drain-Source On-Resistance *1	R <sub>DS(on)</sub>	V <sub>GS</sub> =4.5V, I <sub>D</sub> =5.0A			26	mΩ
		V <sub>GS</sub> =2.5V, I <sub>D</sub> =4.5A			33	
		V <sub>GS</sub> =1.8V, I <sub>D</sub> =4.0A			50	
Forward Transconductance *1	g <sub>FS</sub>	V <sub>DS</sub> =15V, I <sub>D</sub> =5.0A		40		S
Total Gate Charge	Q <sub>g</sub>	V <sub>GS</sub> =4.5V, V <sub>DS</sub> =10V, I <sub>D</sub> =5.0A		11.2	14	nC
Gate Source Charge	Q <sub>gs</sub>			1.4		
Gate Drain Charge	Q <sub>gd</sub>			2.2		
Turn-On DelayTime	t <sub>d(on)</sub>	I <sub>D</sub> =1.0A, V <sub>DS</sub> =10V, V <sub>GEN</sub> =4.5V R <sub>L</sub> =10Ω, R <sub>G</sub> =6Ω		15	25	ns
Turn-On Rise Time	t <sub>r</sub>			40	60	
Turn-Off DelayTime	t <sub>d(off)</sub>			48	70	
Turn-Off Fall Time	t <sub>f</sub>			31	45	
Body Diode Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> = 1.0A, di/dt= 100A/ μ s		13	25	
Maximum Body-Diode Continuous Current	I <sub>S</sub>				1.0	A
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =1.0A, V <sub>GS</sub> =0V		0.8	1.2	V


\*1 Pulse test: PW ≤ 300us duty cycle ≤ 2%.

■ Typical Characteristics


Output Characteristics

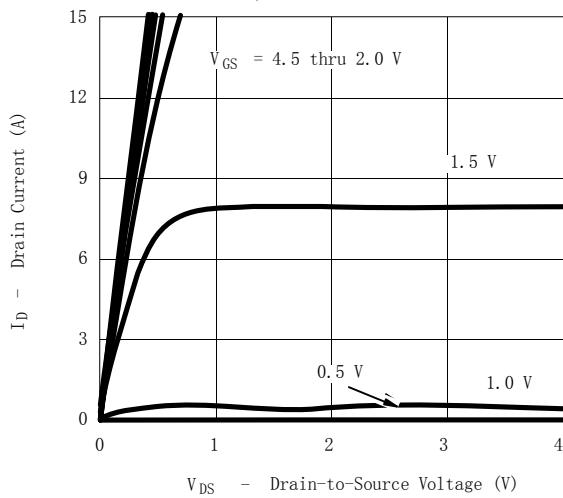


Transfer Characteristics

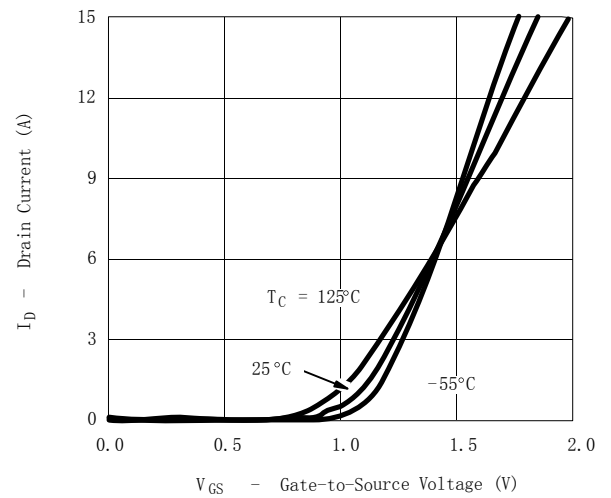


On-Resistance vs. Drain Current

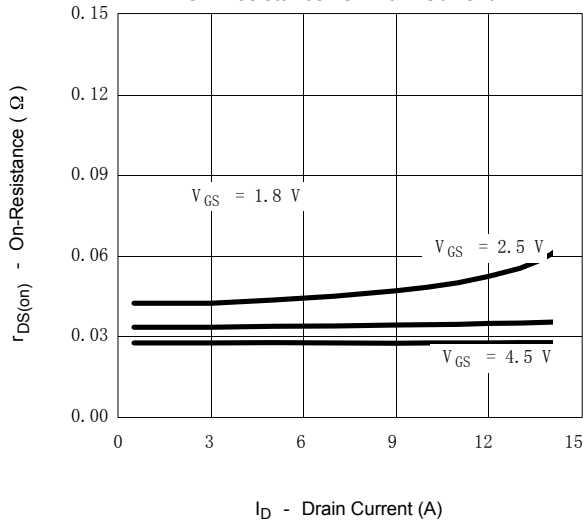


Capacitance

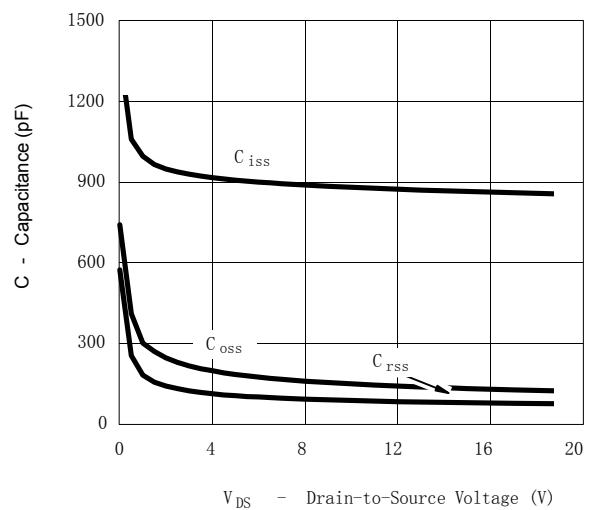






Gate Charge

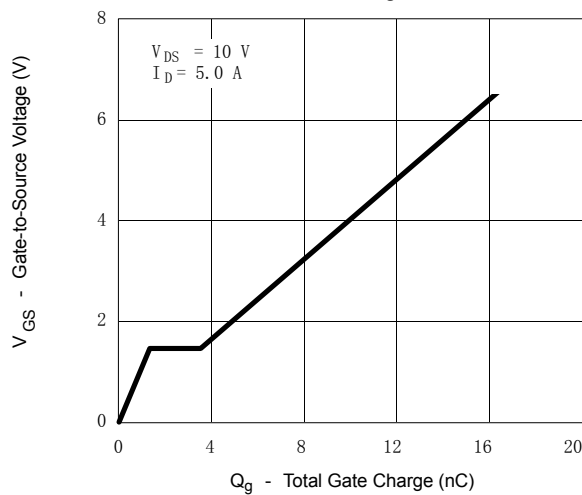


On-Resistance vs. Junction Temperature

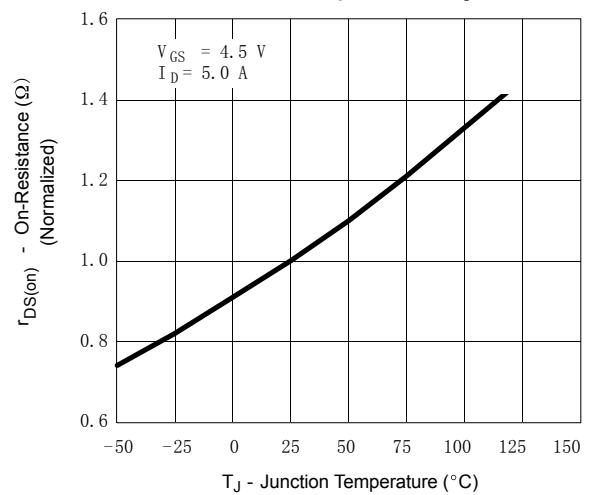

■ Typical Characteristics

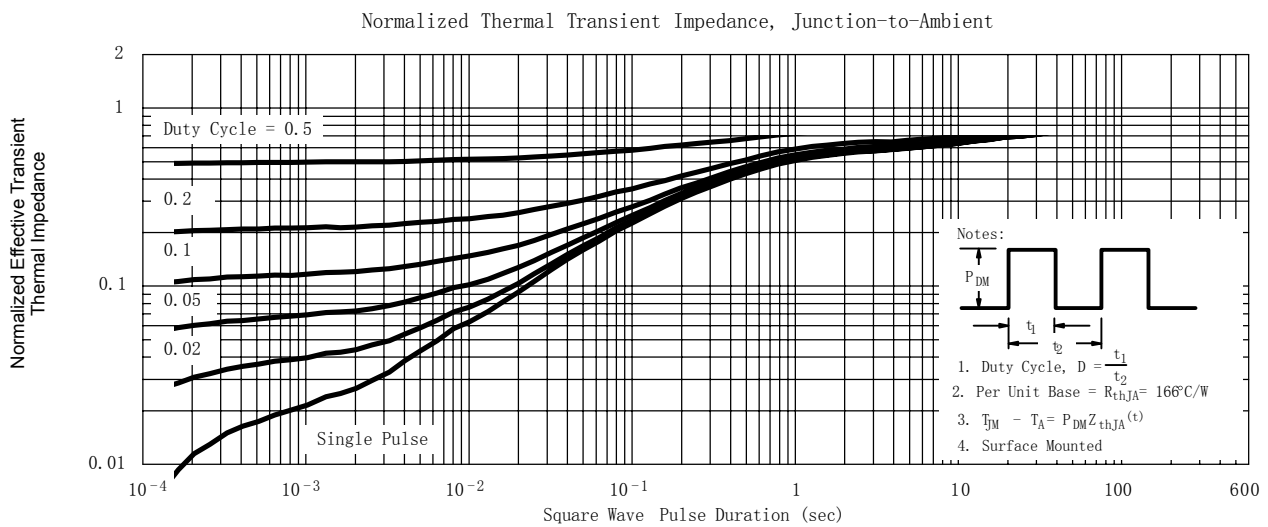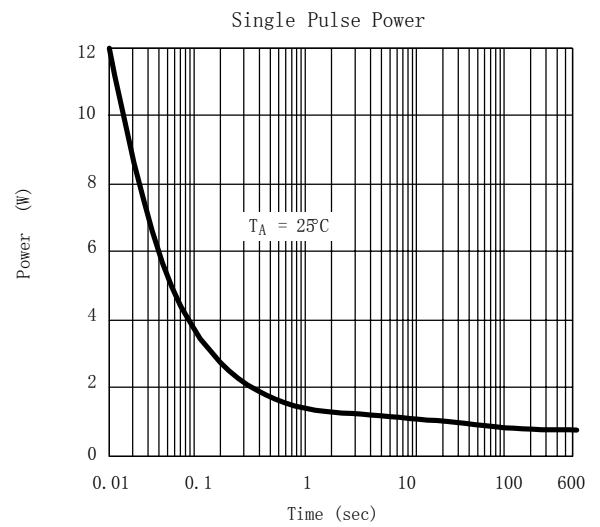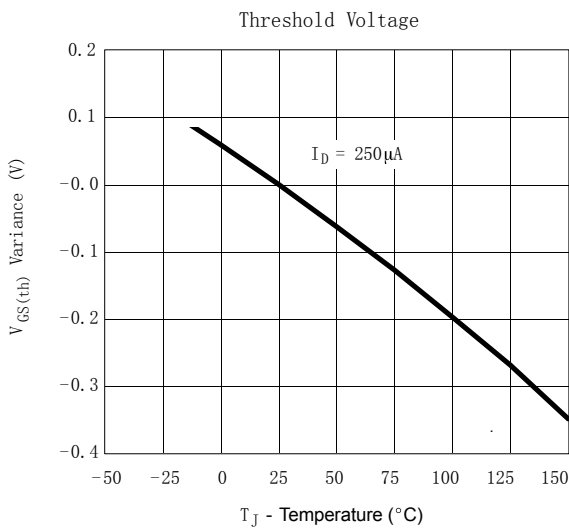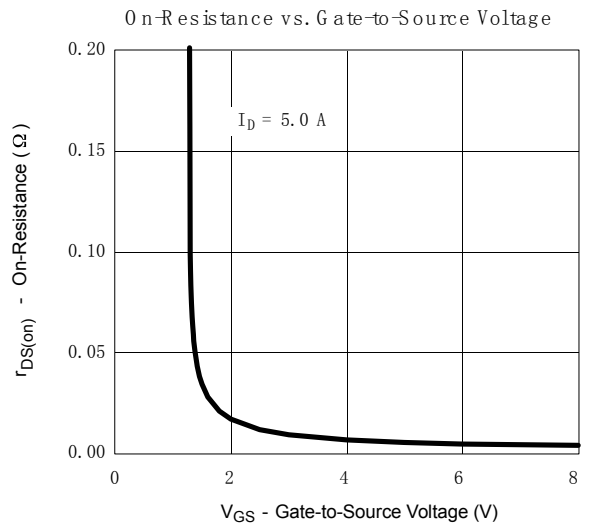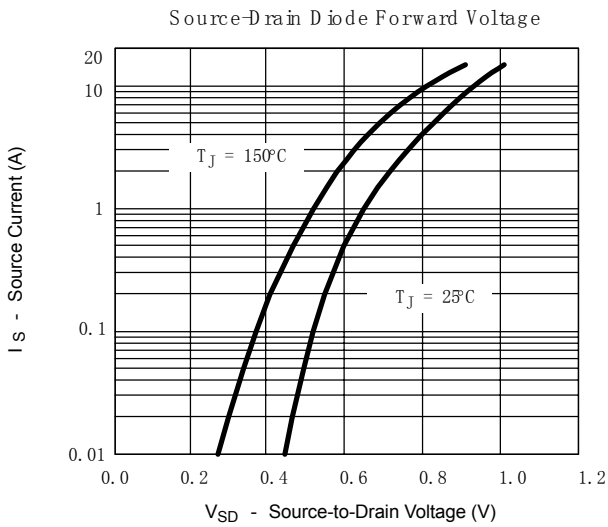


SOT-23 PACKAGE OUTLINE DIMENSIONS

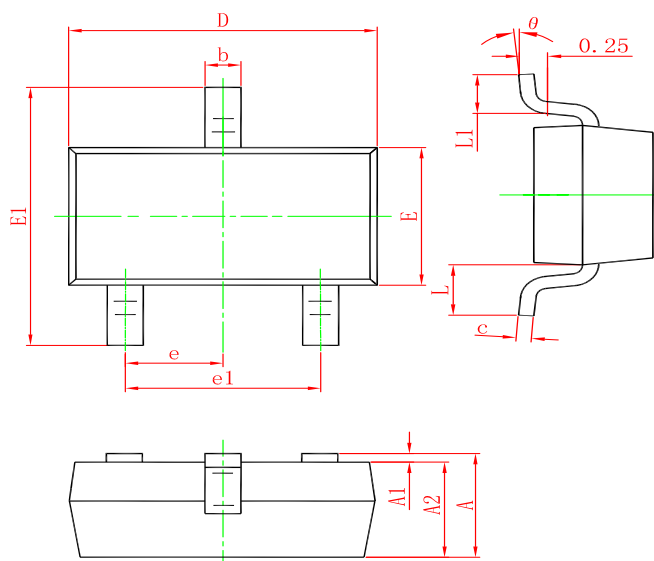

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Marking

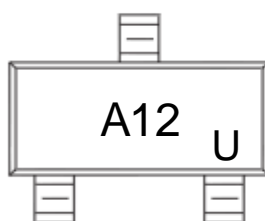

Ordering information

Order code	Package	Baseqty	Deliverymode
UMW SI2312A	SOT-23	3000	Tape and reel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Youtai](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)  
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)  
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)  
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-](#)  
[7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)  
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)  
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)