


FEATURES

- * 1500W surge capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time : typically less than 1.0 ps from 0 volt to $V_{BR(min.)}$
- * Typical I_R less than 1 μ A above 10V

MECHANICAL DATA

- * Case : SMC Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end except Bipolar.
- * Mounting position : Any
- * Weight : 0.21 gram

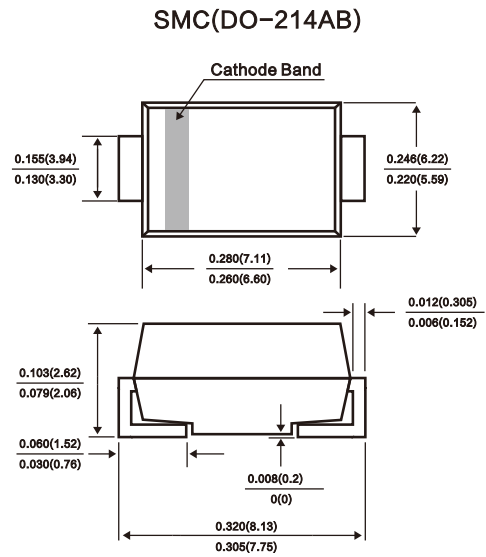

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

| Rating | Symbol | Value | Unit |
|------------------------------------------------------------------------|-----------------------------------|---------------|-------|
| Peak Pulse Power Dissipation ^{(1) (2)} | P _{PPM} | Minimum 1500 | W |
| Peak Forward Surge Current per Fig. 5 ⁽²⁾ | I _{FSM} | 200 | A |
| Maximum Instantaneous Forward Voltage at 50.0A for Unidirectional Only | V _F | 3.5 | Volts |
| Typical Thermal Resistance , Junction to Ambient ⁽³⁾ | R _{θJA} | 75 | °C/W |
| Operating Junction and Storage Temperature Range | T _J , T _{STG} | - 55 to + 150 | °C |

Notes :

- (1) Non-repetitive Current pulse, per Fig. 3 and derated above Ta = 25 °C per Fig. 1
- (2) Mounted on 0.31x 0.31" (8.0 x 8.0mm) copper pads to each terminal.
- (3) Mounted on minimum recommended pad layout

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

| DEVICE TYPE | DEVICE MARKING CODE | | Breakdown Voltage @ $I_T^{(1)}$ | | | Working Peak Reverse Voltage | Maximum Reverse Leakage @ V_{WM} | Maximum Peak Pulse Surge Current | Maximum Clamping Voltage @ IPPM |
|--------------|---------------------|-----|---------------------------------|------|-------|------------------------------|------------------------------------|----------------------------------|---------------------------------|
| | UNI | BI | V_{BR} (V) | | I_T | | | | |
| | | | Min. | Max. | (mA) | V_{WM} (V) | I_D (μA) | IPPM (A) | V_C (V) |
| SMCJ5.0A(CA) | GDE | GDE | 6.40 | 7.07 | 10 | 5.0 | 1000 | 163.0 | 9.2 |
| SMCJ6.0A(CA) | GDG | GDG | 6.67 | 7.37 | 10 | 6.0 | 1000 | 145.6 | 10.3 |
| SMCJ6.5A(CA) | GDK | BDK | 7.22 | 7.98 | 10 | 6.5 | 500 | 133.9 | 11.2 |
| SMCJ7.0A(CA) | GDM | GDM | 7.78 | 8.6 | 10 | 7.0 | 200 | 125.0 | 12.0 |
| SMCJ7.5A(CA) | GDP | BDP | 8.33 | 9.21 | 1.0 | 7.5 | 100 | 116.3 | 12.9 |
| SMCJ8.0A(CA) | GDR | BDR | 8.89 | 9.83 | 1.0 | 8.0 | 50 | 110.3 | 13.6 |
| SMCJ8.5A(CA) | GDT | BDT | 9.44 | 10.4 | 1.0 | 8.5 | 20 | 104.2 | 14.4 |
| SMCJ9.0A(CA) | GDV | BDV | 10.0 | 11.1 | 1.0 | 9.0 | 10 | 97.4 | 15.4 |
| SMCJ10A(CA) | GDX | BDX | 11.1 | 12.3 | 1.0 | 10 | 5.0 | 88.2 | 17.0 |
| SMCJ11A(CA) | GDZ | GDZ | 12.2 | 13.5 | 1.0 | 11 | 5.0 | 82.4 | 18.2 |
| SMCJ12A(CA) | GEE | BEE | 13.3 | 14.7 | 1.0 | 12 | 5.0 | 75.4 | 19.9 |
| SMCJ13A(CA) | GEG | GEG | 14.4 | 15.9 | 1.0 | 13 | 5.0 | 69.8 | 21.5 |
| SMCJ14A(CA) | GEK | BEK | 15.6 | 17.2 | 1.0 | 14 | 5.0 | 64.7 | 23.2 |
| SMCJ15A(CA) | GEM | BEM | 16.7 | 18.5 | 1.0 | 15 | 5.0 | 61.5 | 24.4 |
| SMCJ16A(CA) | GEP | GEP | 17.8 | 19.7 | 1.0 | 16 | 5.0 | 57.7 | 26.0 |
| SMCJ17A(CA) | GER | GER | 18.9 | 20.9 | 1.0 | 17 | 5.0 | 54.3 | 27.6 |
| SMCJ18A(CA) | GET | BET | 20.0 | 22.1 | 1.0 | 18 | 5.0 | 51.4 | 29.2 |
| SMCJ20A(CA) | GEV | BEV | 22.2 | 24.5 | 1.0 | 20 | 5.0 | 46.3 | 32.4 |
| SMCJ22A(CA) | GEX | BEX | 24.4 | 26.9 | 1.0 | 22 | 5.0 | 42.3 | 35.5 |
| SMCJ24A(CA) | GEZ | BEZ | 26.7 | 29.5 | 1.0 | 24 | 5.0 | 38.6 | 38.9 |
| SMCJ26A(CA) | GFE | BFE | 28.9 | 31.9 | 1.0 | 26 | 5.0 | 35.6 | 42.1 |
| SMCJ28A(CA) | GFG | BFG | 31.1 | 34.4 | 1.0 | 28 | 5.0 | 33.0 | 45.4 |
| SMCJ30A(CA) | GFK | BFK | 33.3 | 36.8 | 1.0 | 30 | 5.0 | 31.0 | 48.4 |
| SMCJ33A(CA) | GFM | BFM | 36.7 | 40.6 | 1.0 | 33 | 5.0 | 28.1 | 53.3 |
| SMCJ36A(CA) | GFP | BFP | 40.0 | 44.2 | 1.0 | 36 | 5.0 | 25.8 | 58.1 |
| SMCJ40A(CA) | GFR | BFR | 44.4 | 49.1 | 1.0 | 40 | 5.0 | 23.3 | 64.5 |
| SMCJ43A(CA) | GFT | BFT | 47.8 | 52.8 | 1.0 | 43 | 5.0 | 21.6 | 69.4 |
| SMCJ45A(CA) | GFV | GFV | 50.0 | 55.3 | 1.0 | 45 | 5.0 | 20.6 | 72.7 |
| SMCJ48A(CA) | GFX | GFX | 53.3 | 58.9 | 1.0 | 48 | 5.0 | 19.4 | 77.4 |
| SMCJ51A(CA) | GFZ | GFZ | 56.7 | 62.7 | 1.0 | 51 | 5.0 | 18.2 | 82.4 |
| SMCJ54A(CA) | GGE | GGE | 60.0 | 66.3 | 1.0 | 54 | 5.0 | 17.2 | 87.1 |
| SMCJ58A(CA) | GGG | GGG | 64.4 | 71.2 | 1.0 | 58 | 5.0 | 16.0 | 93.6 |
| SMCJ60A(CA) | GGK | GGK | 66.7 | 73.7 | 1.0 | 60 | 5.0 | 15.5 | 96 |
| SMCJ64A(CA) | GGM | GGM | 71.1 | 78.6 | 1.0 | 64 | 5.0 | 14.6 | 103 |
| SMCJ70A(CA) | GGP | GGP | 77.8 | 86 | 1.0 | 70 | 5.0 | 13.3 | 113 |
| SMCJ75A(CA) | GGR | GGR | 83.3 | 92.1 | 1.0 | 75 | 5.0 | 12.4 | 121 |
| SMCJ78A(CA) | GGT | GGT | 86.7 | 95.8 | 1.0 | 78 | 5.0 | 11.9 | 126 |
| SMCJ85A(CA) | GGV | GGV | 94.4 | 104 | 1.0 | 85 | 5.0 | 10.9 | 137 |
| SMCJ90A(CA) | GGX | GGX | 100 | 111 | 1.0 | 90 | 5.0 | 10.3 | 146 |
| SMCJ100A(CA) | GGZ | GGZ | 111 | 123 | 1.0 | 100 | 5.0 | 9.3 | 162 |
| SMCJ110A(CA) | GHE | GHE | 122 | 135 | 1.0 | 110 | 5.0 | 8.5 | 177 |
| SMCJ120A(CA) | GHG | GHG | 133 | 147 | 1.0 | 120 | 5.0 | 7.8 | 193 |
| SMCJ130A(CA) | GHK | GHK | 144 | 159 | 1.0 | 130 | 5.0 | 7.2 | 209 |
| SMCJ150A(CA) | GHM | GHM | 167 | 185 | 1.0 | 150 | 5.0 | 6.2 | 243 |
| SMCJ160A(CA) | GHP | GHP | 178 | 197 | 1.0 | 160 | 5.0 | 5.8 | 259 |
| SMCJ170A(CA) | GHR | GHR | 189 | 209 | 1.0 | 170 | 5.0 | 5.50 | 275 |
| SMCJ188A(CA) | GHS | GHS | 209 | 231 | 1.0 | 188 | 5.0 | 4.60 | 328 |

Notes :

- (1) Pulse test : $t_p < 50ms$.
- (2) Surge Current Waveform per Figure 5 and Derate per Figure 1
- (3) For bi-directional types have V_{WM} of 10 Volts and less , the I_D limit is doubled
- (4) For the bi-directional SMBJ5.0CA, the maximum V_{BR} is 7.25V
- (5) "SMCJ" will be omitted in marking on the diode.

FIG.1 - PULSE DERATING CURVE

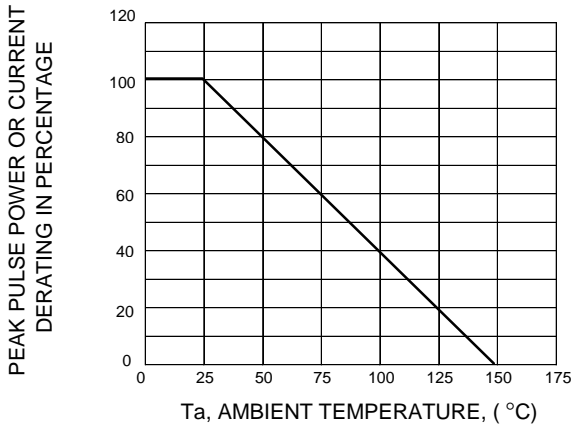


FIG.2 - TYPICAL JUNCTION CAPACITANCE

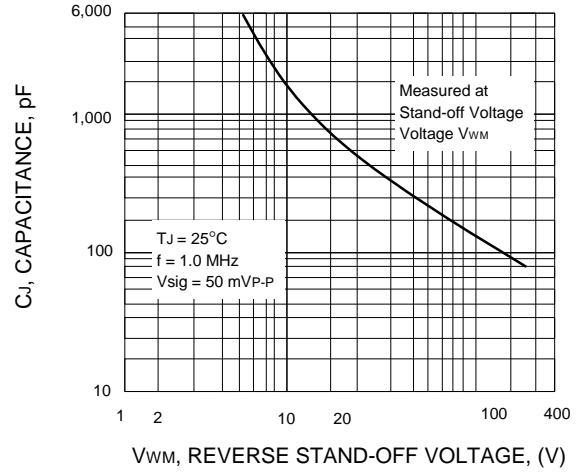


FIG.3 - PULSE WAVEFORM

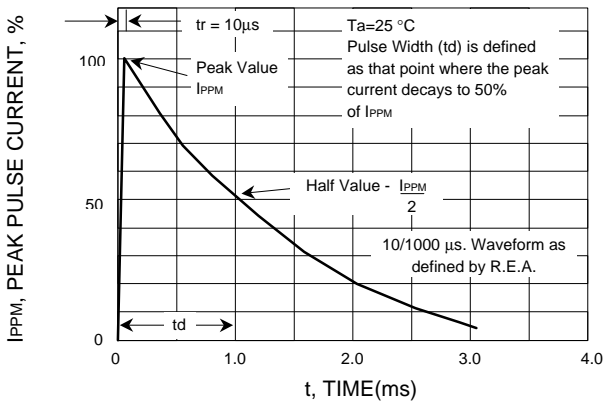


FIG.4 - PEAK PULSE POWER RATING CURVE


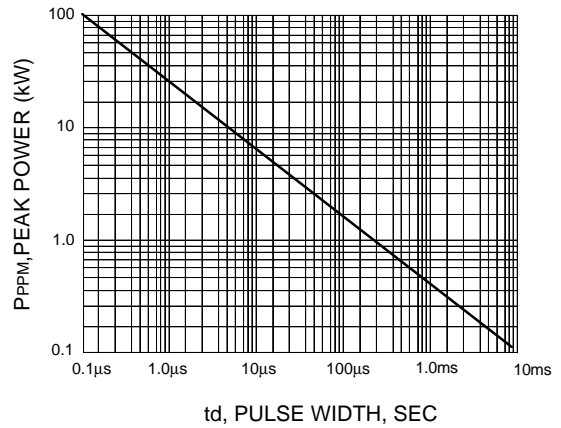


FIG.5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

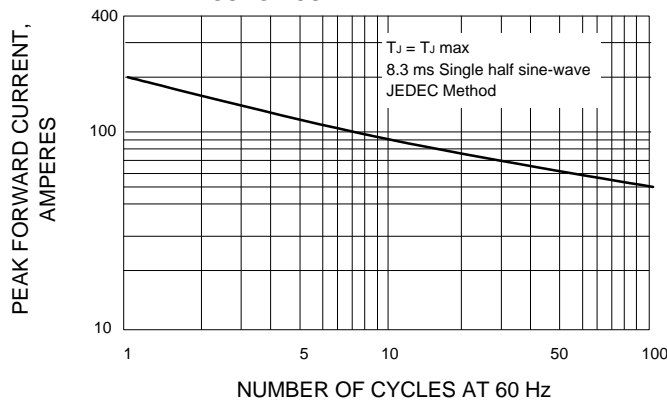

ORDERING INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Youtai](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)