

General Description

The SN74AHCT1G125 device is a single bus buffer gate/line driver with 3-state output. The output is disabled when the output-enable (\overline{OE}) input is high. When \overline{OE} is low, data is passed from the A input to the Y output.

Features

- Operating Range of 4.5 V to 5.5 V
- Max tpd of 10 ns at 5 V
- Low Power Consumption, 10 μ A Max ICC
- ± 8 mA Output Drive at 5 V
- Inputs are TTL-Voltage Compatible
- Packages are SC70-5, SOT23-5 or small DFN6
- MSL3(SC70-5, SOT23-5, DFN6(1*1.5))

Pin Configuration

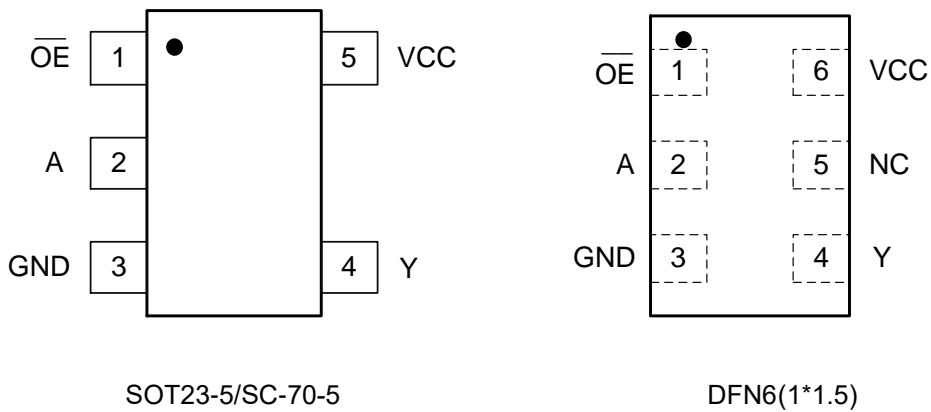


Figure1. Top View

Pin Function

SC70-5/ SOT23-5

Pin No.	Pin Name	Function
1	\overline{OE}	Enable input
2	A	Input
3	GND	Ground
4	Y	Output
5	VCC	Supply Voltage

DFN6

Pin No.	Pin Name	Function
1	\overline{OE}	Enable input
2	A	Input
3	GND	Ground
4	Y	Output
5	NC	No connect
6	VCC	Supply Voltage

Block Diagram

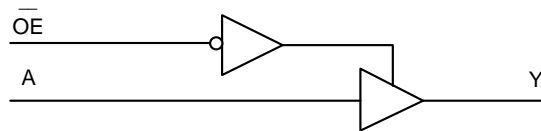


Figure2. Logic Symbol

Functional Description

Function Table

Input		Output
\overline{OE}	A	Y
L	L	L
L	H	H
H	X	Z

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	Supply Voltage Range		-0.5 to 7.0	V
V _I	Input Voltage Range ⁽¹⁾		-0.5 ≤ V _I ≤ +7.0	V
V _O	Output Voltage Range ⁽¹⁾		-0.5 to V _{CC} + 0.5	V
I _{IK}	Input Clamp Current	V _I < 0	-20	mA
I _{OK}	Output Clamp Current	V _O < GND, V _O > V _{CC}	±20	mA
I _O	Continuous Output Current V _O = 0 to V _{CC}		±25	mA
	Continuous channel current through V _{CC} or GND		±50	mA
T _{STG}	Storage Temperature Range		-65 to 150	°C
T _J	Junction Temperature Under Bias		150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±100	mA

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C/W
	SOT23-5		250	
	DFN6(1.0×1.5)		440	
P _D	SC70-5	Power Dissipation in Still Air at 85°C	215	mW
	SOT23-5		260	
	DFN6(1.0×1.5)		150	

Recommended Operating Conditions

 Over operating free-air temperature range (unless otherwise noted)⁽⁵⁾

Symbol	Parameter	Min	Max	Unit
V _{CC}	Supply Voltage	4.5	5.5	V
V _{IH}	High-level Input Voltage	2		V
V _{IL}	Low-level Input Voltage		0.8	V
V _I	Input Voltage	0	5.5	V
V _O	Output Voltage	0	V _{CC}	V
I _{OH}	High-level Output Current		-8	mA
I _{OL}	Low-level Output Current		8	mA
Δt/Δv	Input Transition Rise or Fall Rate		20	ns/V
T _A	Operating Free-air Temperature	-40	125	°C

Note5: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

Electrical Characteristics

Over recommended operating free-air temperature range (unless otherwise noted)

Symbol	Parameter	Condition	V _{CC}	T _A = 25 °C			-40°C to 85°C		-40°C to 125°C		Unit
				Min	Typ	Max	Min	Max	Min	Max	
V _{OH}	High-Level Output Voltage	I _{OH} = -50μA	4.5 V	4.4	4.5		4.4		4.4		V
		I _{OH} = -8mA		3.94			3.8		3.8		
V _{OL}	Low-Level Output Voltage	I _{OH} = 50μA	4.5 V			0.1		0.1		0.1	V
		I _{OL} = 8mA				0.36		0.44		0.44	
I _I	Input Leakage Current	V _I = 5.5 V or GND	0V to 5.5V			±0.1		±1		±1	μA
I _{oz}	OFF-state Output Current	V _O = V _{CC} or GND	5.5 V			±0.25		±2.5		±2.5	μA
I _{CC}	Quiescent Supply Current	V _I = V _{CC} or GND, I _O = 0	5.5 V			1		10		10	μA
ΔI _{CC} ⁽⁶⁾	Additional Supply Current	One input at 3.4 V, Other input at V _{CC} or GND	5.5 V			1.35		1.5		1.5	mA
C _I	Input Capacitance	V _I = V _{CC} or GND	5 V		3	10		10		10	pF
C _O	Output Capacitance	V _O = V _{CC} or GND	5 V		8						pF

Note6: This is the increase in supply current for each input at one of the specified TTL voltage levels, rather than 0 V or V_{CC}.

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted)

	Parameter	Condition	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C to } 85^\circ\text{C}$		$-40^\circ\text{C to } 125^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	Min	Max	
t_{PLH}	Propagation Delay	$C_L = 15\text{pF}$		3.8	5.7	1	10	1	11	ns
t_{PHL}		$C_L = 50\text{pF}$		5.3	8.0	1	11	1	12	
t_{PZL}	Output Enable Time	$C_L = 15\text{pF}$		3.6	5.5	1	9	1	10	ns
t_{PZH}		$C_L = 50\text{pF}$		4.3	7.5	1	10	1	11	
t_{PLZ}	Output Disable Time	$C_L = 15\text{pF}$		7.1	12	1	15	1	17	ns
t_{PHZ}		$C_L = 50\text{pF}$		8.5	13	1	16	1	18	




Operating Characteristics

$V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

Symbol	Parameter	Condition	Typ	Unit
C_{PD}	Power Dissipation Capacitance	No load, $f = 1\text{ MHz}$	10	pF

Note7: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(OPR)} = C_{PD} \times V_{CC} \times f_{in} + I_{CC} \times C_{PD}$ is used to determine the no-load dynamic power consumption; $P_D = C_{PD} \times V_{CC}^2 \times f_{in} + I_{CC} \times V_{CC} \times Fig.$

Parameter Measurement Information

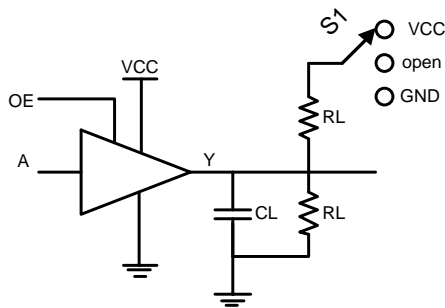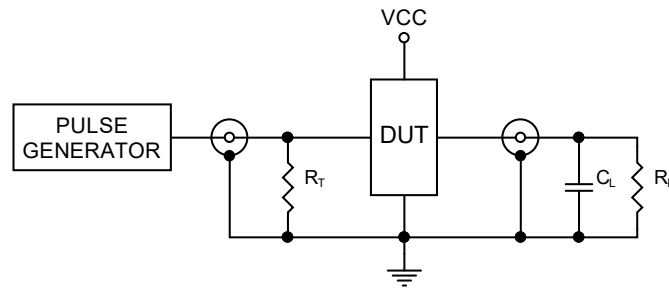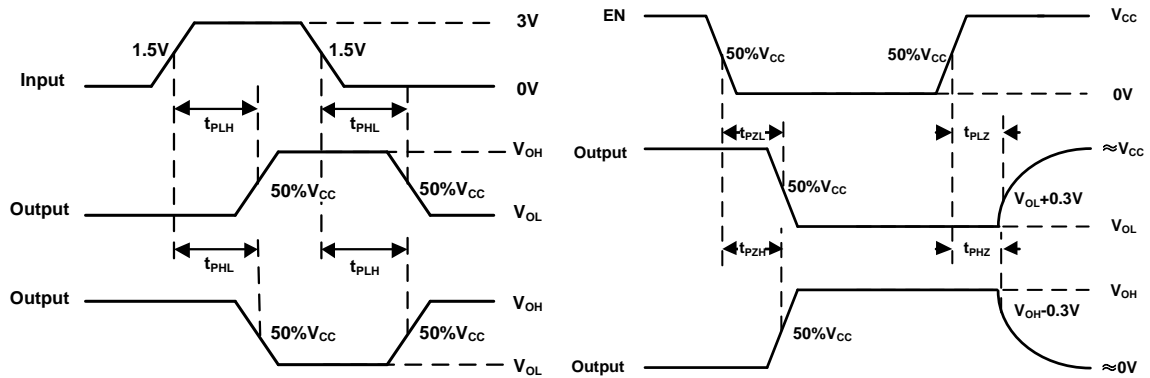

Test	Switch
tPD	Open
tPZL tPLZ	VCC
tPZH tPHZ	GND

CL includes probe and jig capacitance

All input pulses are supplied by generators having the following characteristics: PRR ≤ 1MHz, ZO=50Ω, tr ≤ 3ns, tf ≤ 3ns.

The outputs are measured one at a time with one input transition per measurement.

All parameters and waveforms are not applicable to all devices.

Figure3. Load Circuit and Voltage Waveforms

Package Dimension

SC70-5

SOT23-5

DFN6(1.0×1.5)

Ordering information

Order code	Marking code	Package	Baseqty	Delivery mode
UMW SN74AHCT1G125DBVR	B25S U	SOT23-5	3000	Tape and reel
UMW SN74AHCT1G125DCKR	BMG U	SC70-5	3000	Tape and reel
UMW SN74AHCT1G125DRYR	—	DFN6(1*1.5)	5000	Tape and reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Logic Gates](#) category:

Click to view products by [Youtai](#) manufacturer:

Other Similar products are found below :

[NL17SG32DFT2G](#) [CD4068BE](#) [NL17SG86DFT2G](#) [NLX1G11AMUTCG](#) [NLX1G97MUTCG](#) [74LS38](#) [74LVC1G08Z-7](#) [CD4025BE](#)
[NLV17SZ00DFT2G](#) [NLV17SZ126DFT2G](#) [NLV27WZ17DFT2G](#) [NLV74HC02ADR2G](#) [74HC32S14-13](#) [74LS133](#) [74LVC1G32Z-7](#)
[74LVC1G86Z-7](#) [NLV74HC14ADR2G](#) [NLV74HC20ADR2G](#) [NLVVHC1G09DFT1G](#) [NLX2G86MUTCG](#) [74LVC2G32RA3-7](#)
[74LVC2G00HD4-7](#) [NL17SG02P5T5G](#) [74LVC2G86HK3-7](#) [NLVVHC1G14DFT2G](#) [NLX1G99DMUTWG](#) [NLVVHC1G00DFT2G](#)
[NLV7SZ57DFT2G](#) [NLV74VHC04DTR2G](#) [NLV27WZ00USG](#) [NLU1G86CMUTCG](#) [NLU1G08CMUTCG](#) [NL17SZ32P5T5G](#)
[NL17SZ00P5T5G](#) [NL17SH02P5T5G](#) [74AUP2G00RA3-7](#) [NLVVHC1GT00DFT2G](#) [NLV74HC02ADTR2G](#) [NLX1G332CMUTCG](#)
[NLVHCT132ADTR2G](#) [NL17SG86P5T5G](#) [NL17SZ05P5T5G](#) [NLV74VHC00DTR2G](#) [NLVVHC1G02DFT1G](#) [NLV74HC86ADR2G](#)
[74LVC2G86RA3-7](#) [NL17SZ38DBVT1G](#) [NLV18SZ00DFT2G](#) [NLVVHC1G07DFT1G](#) [NLVVHC1G02DFT2G](#)