

60V N-Channel Enhancement Mode Power MOSFET

General Description


The 30N06 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.

Features


- $V_{DS} = 60V, I_D = 30A$
 $R_{DS(ON)}, 23m\Omega$ (Typ) @ $V_{GS} = 10V$
 $R_{DS(ON)}, 29m\Omega$ (Typ) @ $V_{GS} = 4.5V$
- Advanced Trench Technology
- Excellent $R_{DS(ON)}$ and Low Gate Charge
- Lead free product is acquired

Application

- Load Switch
- PWM Application
- Power management



1.G 2.D 3.S
TO-252(DPAK) top view



Schematic Diagram

Absolute Maximum Ratings($T_A=25^\circ C$ unless otherwise noted)

| Parameter | Symbol | Value | Unit | |
|---|-----------|-------------------|------------|---|
| Drain-Source Voltage | V_{DS} | 60 | V | |
| Gate-Source Voltage | V_{GS} | ± 20 | V | |
| Drain Current-Continuous ^{Note3} | I_D | TC=25 $^\circ C$ | 30 | A |
| | | TC=100 $^\circ C$ | 20 | A |
| Drain Current-Pulsed ^{Note1} | I_{DM} | 120 | A | |
| Avalanche Energy ^{Note4} | E_{AS} | 72 | mJ | |
| Maximum Power Dissipation | P_D | 55 | W | |
| Storage Temperature Range | T_{STG} | -55 to +150 | $^\circ C$ | |
| Operating Junction Temperature Range | T_J | -55 to +150 | $^\circ C$ | |

Thermal Resistance

| Parameter | Symbol | Min. | Typ. | Max | Unit |
|--------------------------------------|-----------------|------|------|-----|--------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | - | - | 2.7 | $^\circ C/W$ |

60V N-Channel Enhancement Mode Power MOSFET
Electrical Characteristics(T_J=25°C unless otherwise noted)

| OFF CHARACTERISTICS | | | | | | |
|---------------------------------|-------------------|---|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Drain-Source Breakdown Voltage | BV _{DSS} | V _{GS} =0V, I _{DS} =250uA | 60 | - | - | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =60V, V _{GS} =0V | - | - | 1 | uA |
| Gate-Body Leakage | I _{GSS} | V _{GS} =±20V, V _{DS} =0V | - | - | ±100 | nA |

| ON CHARACTERISTICS | | | | | | |
|----------------------------------|---------------------|---|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Gate Threshold Voltage | V _{GS(TH)} | V _{DS} =V _{GS} , I _{DS} =250uA | 1.0 | 1.6 | 2.5 | V |
| Drain-Source On-State Resistance | R _{DS(ON)} | V _{GS} =10V, I _{DS} =15A | - | 23 | 29 | mΩ |
| | | V _{GS} =4.5V, I _{DS} =10A | - | 29 | 40 | mΩ |

| DYNAMIC CHARACTERISTICS | | | | | | |
|------------------------------|------------------|---|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Input Capacitance | C _{ISS} | V _{DS} =25V, V _{GS} = 0V, f=1MHz | - | 1562 | - | pF |
| Output Capacitance | C _{OSS} | | - | 75.4 | - | |
| Reverse Transfer Capacitance | C _{rss} | | - | 66.8 | - | |

| SWITCHING CHARACTERISTICS | | | | | | |
|-----------------------------|---------------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Turn-On Delay Time | T _{d(on)} | V _{GS} =10V, V _{DS} =30V, R _{GEN} =1.8Ω I _D =15A | - | 7.5 | - | ns |
| Rise Time | t _r | | - | 21 | - | |
| Turn-Off Delay Time | T _{d(off)} | | - | 16 | - | |
| Fall Time | t _f | | - | 23.5 | - | |
| Total Gate Charge at 10V | Q _g | V _{DS} =30V, I _{DS} =15A, V _{GS} =10V | - | 25 | - | nC |
| Gate to Source Gate Charge | Q _{gs} | | - | 4.5 | - | |
| Gate to Drain"Miller"Charge | Q _{gd} | | - | 6.5 | - | |

| DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS | | | | | | |
|--|-----------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Drain-Source Diode Forward Voltage | V _{SD} | V _{GS} =0V, I _{DS} =15A | - | - | 1.2 | V |
| Reverse Recovery Time | t _{rr} | T _J =25°C, I _F =15A di/dt=100A/us | - | 29 | - | nS |
| Reverse Recovery Charge | Q _{rr} | | - | 45 | - | nC |

Notes:

- 1: Repetitive rating, pulse width limited by maximum junction temperature.
- 2: Surface mounted on FR4 Board, t_s≤10sec.
- 3: Pulse width ≤ 300μs, duty cycle ≤ 2%.
- 4: EAS condition: L=0.5mH, V_{DD}=30V, V_G=10V, V_{GATE}=60V, Start T_J=25°C.

60V N-Channel Enhancement Mode Power MOSFET

Typical Performance Characteristics

Figure 1: Output Characteristics

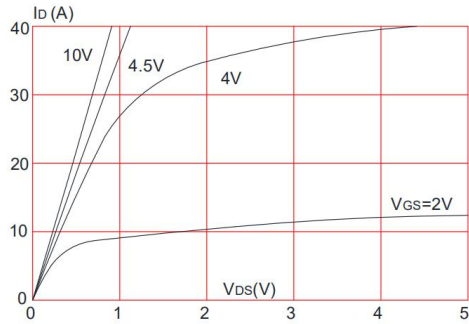


Figure 2: Typical Transfer Characteristics

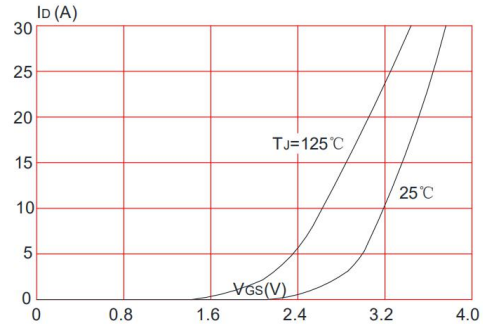


Figure 3: On-resistance vs. Drain Current

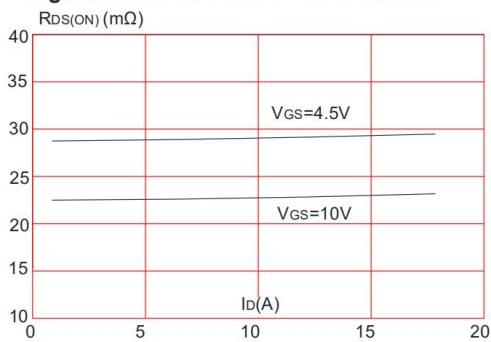


Figure 4: Body Diode Characteristics

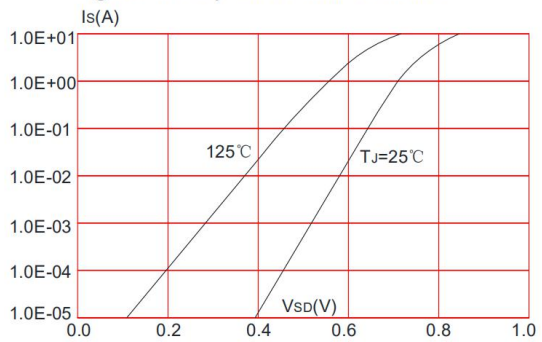


Figure 5: Gate Charge Characteristics


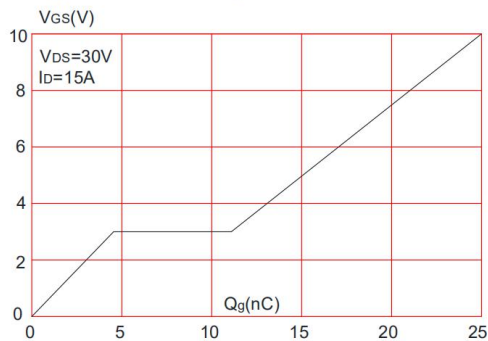


Figure 6: Capacitance Characteristics

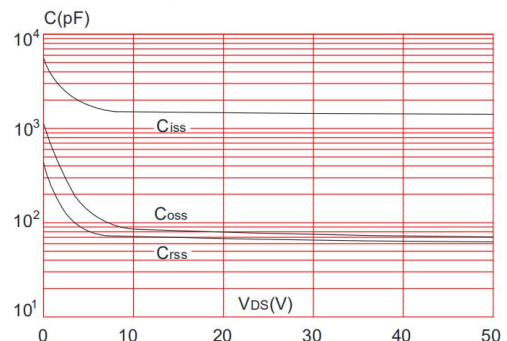

60V N-Channel Enhancement Mode Power MOSFET

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

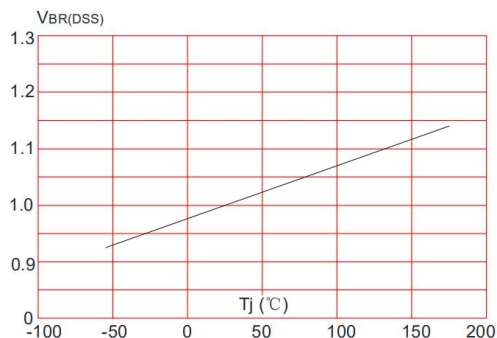


Figure 8: Normalized on Resistance vs. Junction Temperature

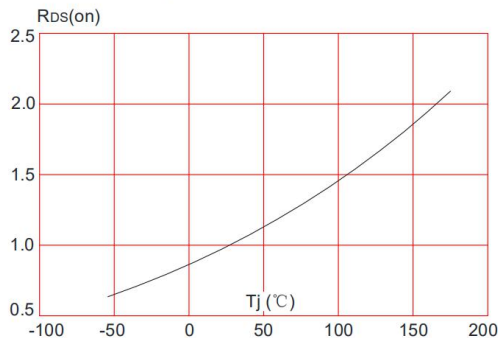


Figure 9: Maximum Safe Operating Area

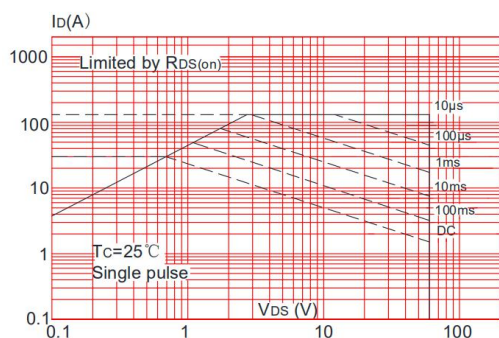


Figure 10: Maximum Continuous Drain Current vs. Case Temperature


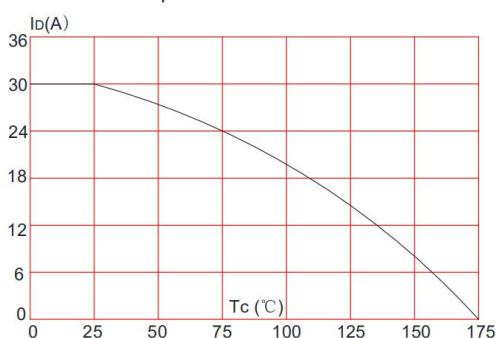


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

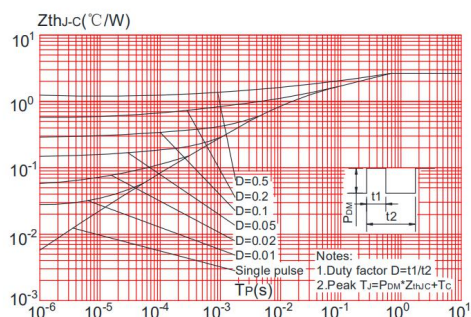

60V N-Channel Enhancement Mode Power MOSFET

Test Circuit

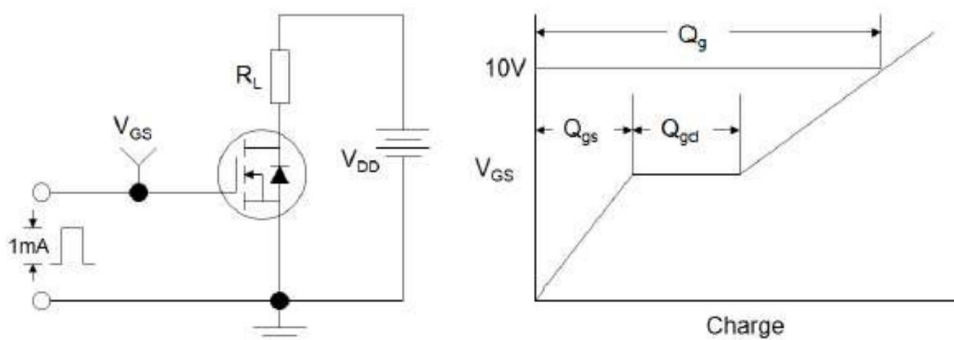


Figure1:Gate Charge Test Circuit & Waveform

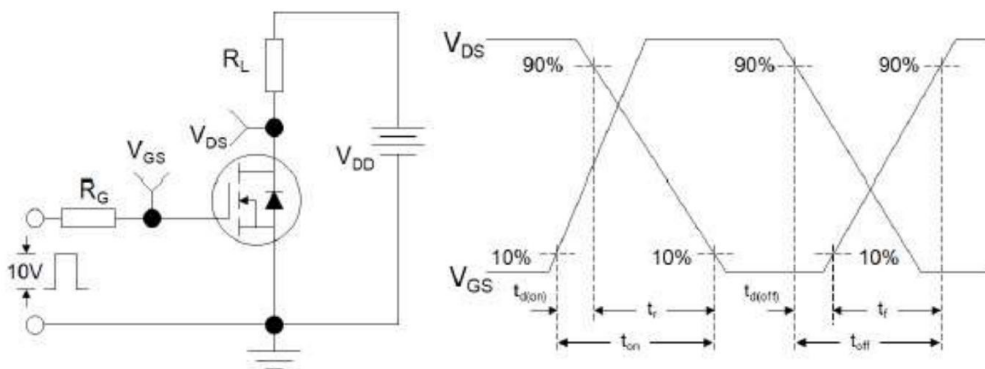


Figure 2: Resistive Switching Test Circuit & Waveforms


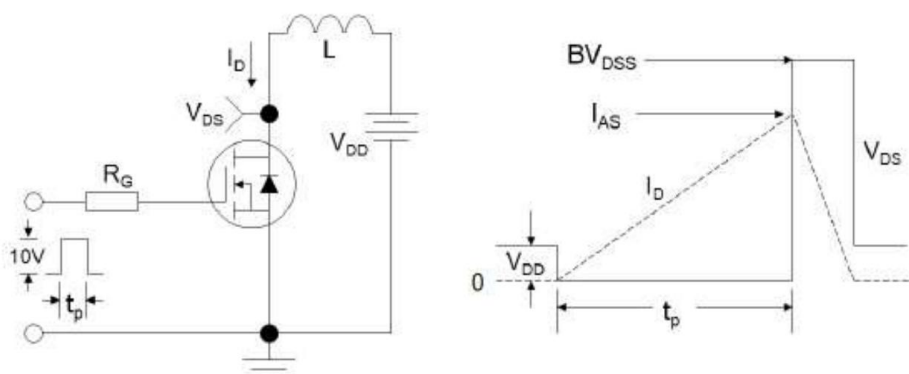


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms


60V N-Channel Enhancement Mode Power MOSFET

Package Mechanical Data

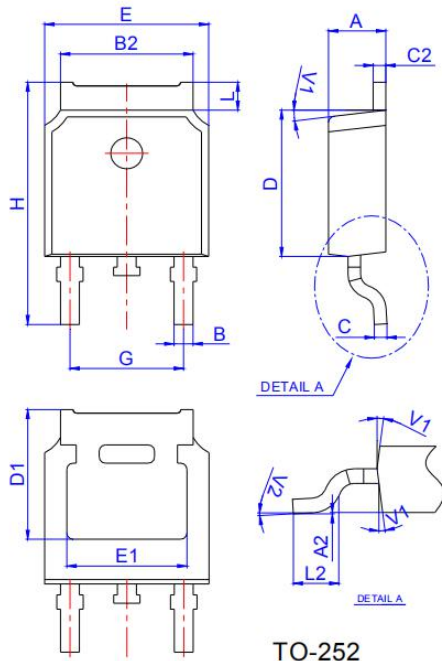

| Ref. | Dimensions | | | | | |
|------|-------------|------|-------|----------|------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 2.10 | | 2.50 | 0.083 | | 0.098 |
| A2 | 0 | | 0.10 | 0 | | 0.004 |
| B | 0.66 | | 0.86 | 0.026 | | 0.034 |
| B2 | 5.18 | | 5.48 | 0.202 | | 0.216 |
| C | 0.40 | | 0.60 | 0.016 | | 0.024 |
| C2 | 0.44 | | 0.58 | 0.017 | | 0.023 |
| D | 5.90 | | 6.30 | 0.232 | | 0.248 |
| D1 | 5.30REF | | | 0.209REF | | |
| E | 6.40 | | 6.80 | 0.252 | | 0.268 |
| E1 | 4.63 | | | 0.182 | | |
| G | 4.47 | | 4.67 | 0.176 | | 0.184 |
| H | 9.50 | | 10.70 | 0.374 | | 0.421 |
| L | 1.09 | | 1.21 | 0.043 | | 0.048 |
| L2 | 1.35 | | 1.65 | 0.053 | | 0.065 |
| V1 | | 7° | | | 7° | |
| V2 | 0° | | 6° | 0° | | 6° |


Reel Specification-TO-252

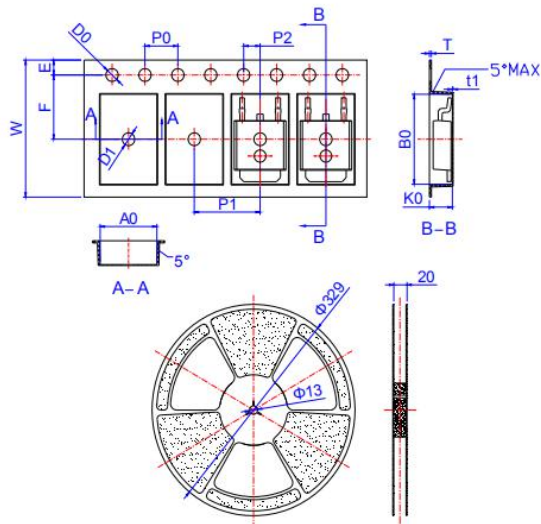

| Ref. | Dimensions | | | | | |
|------|-------------|-------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| W | 15.90 | 16.00 | 16.10 | 0.626 | 0.630 | 0.634 |
| E | 1.65 | 1.75 | 1.85 | 0.065 | 0.069 | 0.073 |
| F | 7.40 | 7.50 | 7.60 | 0.291 | 0.295 | 0.299 |
| D0 | 1.40 | 1.50 | 1.60 | 0.055 | 0.059 | 0.063 |
| D1 | 1.40 | 1.50 | 1.60 | 0.055 | 0.059 | 0.063 |
| P0 | 3.90 | 4.00 | 4.10 | 0.154 | 0.157 | 0.161 |
| P1 | 7.90 | 8.00 | 8.10 | 0.311 | 0.315 | 0.319 |
| P2 | 1.90 | 2.00 | 2.10 | 0.075 | 0.079 | 0.083 |
| A0 | 6.85 | 6.90 | 7.00 | 0.270 | 0.271 | 0.276 |
| B0 | 10.45 | 10.50 | 10.60 | 0.411 | 0.413 | 0.417 |
| K0 | 2.68 | 2.78 | 2.88 | 0.105 | 0.109 | 0.113 |
| T | 0.24 | | 0.27 | 0.009 | | 0.011 |
| t1 | 0.10 | | | 0.004 | | |
| 10P0 | 39.80 | 40.00 | 40.20 | 1.567 | 1.575 | 1.583 |

60V N-Channel Enhancement Mode Power MOSFET

Marking



Ordering information

| Order code | Package | Baseqty | Deliverymode |
|------------|---------|---------|---------------|
| UMW 30N06 | TO-252 | 2500 | Tape and reel |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Youtai](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-](#)
[7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)