
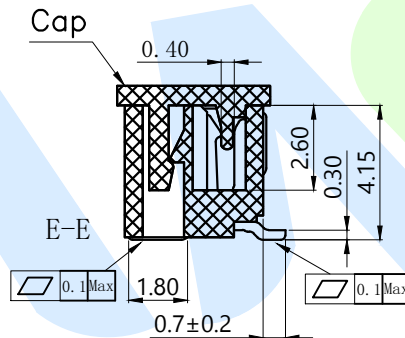
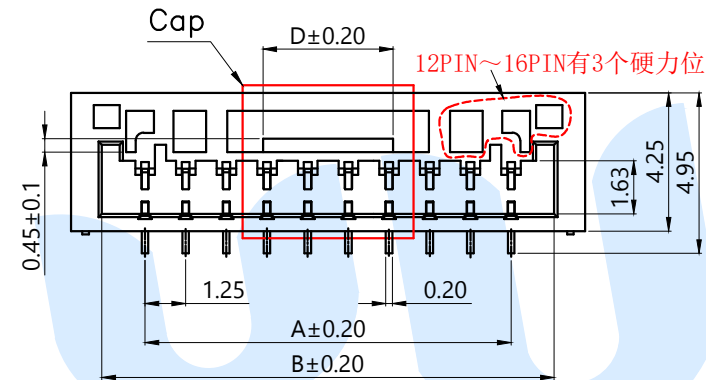
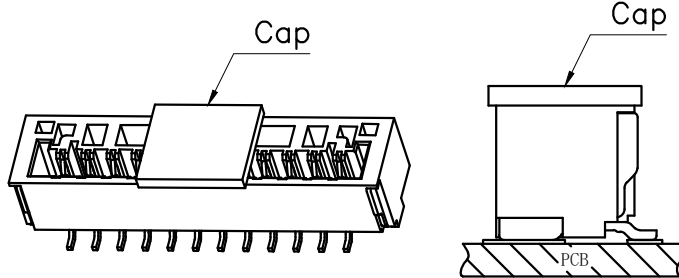


RoHS



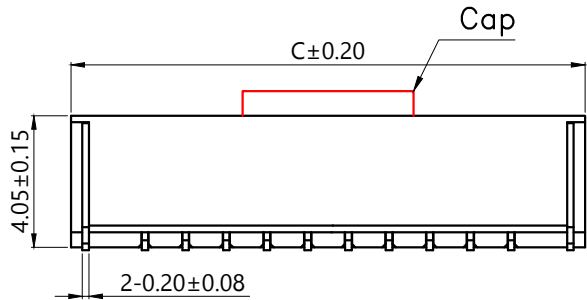


| Model No. | Pin | A | B | C | C |
|-----------------------|-----|-------|-------|-------|------|
| WAFER-GH1.25-2PLT-W1 | 2 | 1.25 | 3.85 | 5.80 | 1.00 |
| WAFER-GH1.25-3PLT-W1 | 3 | 2.50 | 5.10 | 7.05 | 1.75 |
| WAFER-GH1.25-4PLT-W1 | 4 | 3.75 | 6.35 | 8.30 | 2.00 |
| WAFER-GH1.25-5PLT-W1 | 5 | 5.00 | 7.60 | 9.55 | 3.26 |
| WAFER-GH1.25-6PLT-W1 | 6 | 6.25 | 8.85 | 10.80 | 4.52 |
| WAFER-GH1.25-7PLT-W1 | 7 | 7.50 | 10.10 | 12.05 | 4.50 |
| WAFER-GH1.25-8PLT-W1 | 8 | 8.75 | 11.35 | 13.30 | 4.50 |
| WAFER-GH1.25-9PLT-W1 | 9 | 10.00 | 12.60 | 14.55 | 4.50 |
| WAFER-GH1.25-10PLT-W1 | 10 | 11.25 | 13.85 | 15.80 | 6.50 |
| WAFER-GH1.25-11PLT-W1 | 11 | 12.50 | 15.10 | 17.05 | 6.50 |
| WAFER-GH1.25-12PLT-W1 | 12 | 13.75 | 16.35 | 18.30 | 6.50 |
| WAFER-GH1.25-13PLT-W1 | 13 | 15.00 | 17.60 | 19.55 | 6.50 |
| WAFER-GH1.25-14PLT-W1 | 14 | 16.25 | 18.85 | 20.80 | 6.50 |
| WAFER-GH1.25-15PLT-W1 | 15 | 17.50 | 20.10 | 22.05 | 6.50 |
| WAFER-GH1.25-16PLT-W1 | 16 | 18.75 | 21.35 | 23.30 | 6.50 |

WAFER-GH1.25-□□PLT-W1 (-P=盘装, 非盘装不启用)

Specifications/技术规格:

- 1.Poles/线数: 2~16P
- 2.Wire range/适用线规: AGW 32#~28#
- 3.Applicable PC board thickness/适用PC板厚度: 0.6~1.2mm
- 4.Current rating/额定电流: 1.0A
- 5.Voltage rating/额定电压: 125V DC/AC
- 6.Insulation Resistance/绝缘电阻: 100MΩ Min
- 7.Dielectric Withstanding/ 耐压: 500V AC/minute
- 8.Contact Resistance/ 接触电阻: 20mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

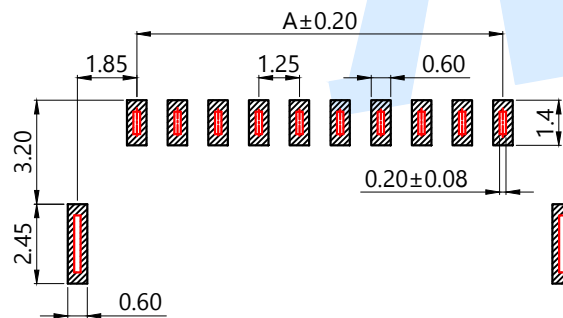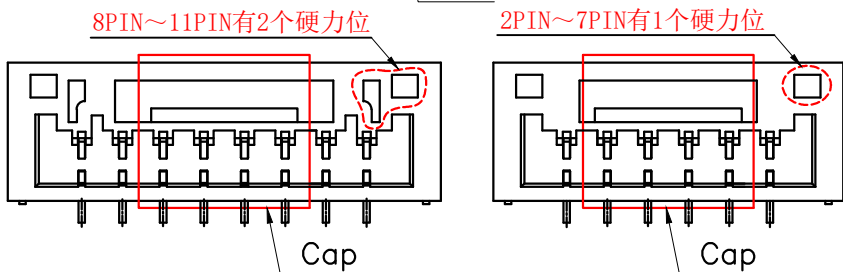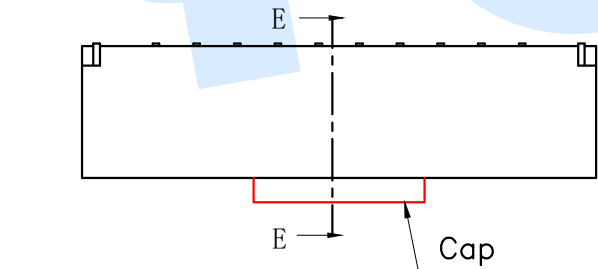

适用线路板 (PCB LAYOUT)

| NO. | Name | Number | Qty | Material | Remarks |
|-----|---------------|--------|-----|--------------------|------------|
| Ⓒ | Soldering lug | | 1 | Phosphorous copper | Plating Sn |
| Ⓑ | Terminal | | | Phosphorous copper | Plating Sn |
| Ⓐ | Housing | | 1 | LCP | Off White |

YUANDI® Yuandi Electronics Co., Ltd
元迪

| design | date | name | WAFER CONNECTOR |
|----------|------|-------|-----------------------|
| Review | date | model | WAFER-GH1.25-□□PLT-W1 |
| Approved | date | | |

| | | | | | | | | | |
|--------|--------|----------|-------------------------|------------|-----|------|----|-------------|----|
| modify | Review | Approved | Tolerance not specified | Proportion | 1:1 | unit | mm | gape number | A4 |
|--------|--------|----------|-------------------------|------------|-----|------|----|-------------|----|

| | |
|-------|-------|
| angle | ±2' |
| 10~30 | ±0.30 |
| 5~10 | ±0.20 |
| ~ 5 | ±0.10 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Yuandi](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)