


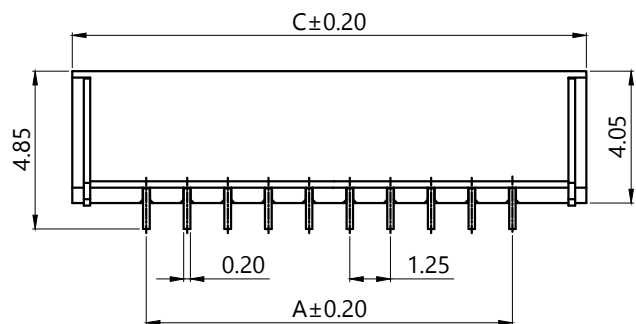



RoHS

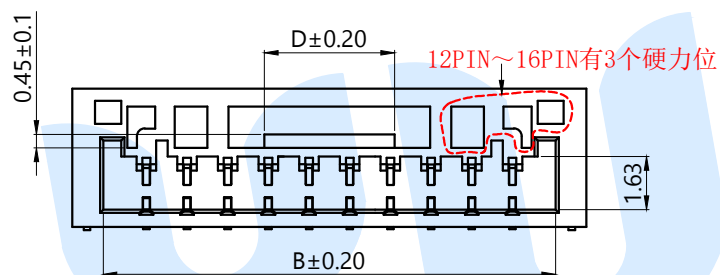

2PIN~7PIN有1个硬力位



8PIN~11PIN有2个硬力位



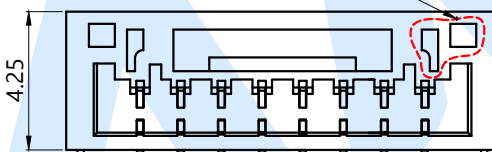


| Model No.             | Pin | A     | B     | C     | C    |
|-----------------------|-----|-------|-------|-------|------|
| WAFER-GH1.25-2PWT-W1  | 2   | 1.25  | 3.85  | 5.80  | 1.00 |
| WAFER-GH1.25-3PWT-W1  | 3   | 2.50  | 5.10  | 7.05  | 1.75 |
| WAFER-GH1.25-4PWT-W1  | 4   | 3.75  | 6.35  | 8.30  | 2.00 |
| WAFER-GH1.25-5PWT-W1  | 5   | 5.00  | 7.60  | 9.55  | 3.26 |
| WAFER-GH1.25-6PWT-W1  | 6   | 6.25  | 8.85  | 10.80 | 4.52 |
| WAFER-GH1.25-7PWT-W1  | 7   | 7.50  | 10.10 | 12.05 | 4.50 |
| WAFER-GH1.25-8PWT-W1  | 8   | 8.75  | 11.35 | 13.30 | 4.50 |
| WAFER-GH1.25-9PWT-W1  | 9   | 10.00 | 12.60 | 14.55 | 4.50 |
| WAFER-GH1.25-10PWT-W1 | 10  | 11.25 | 13.85 | 15.80 | 6.50 |
| WAFER-GH1.25-11PWT-W1 | 11  | 12.50 | 15.10 | 17.05 | 6.50 |
| WAFER-GH1.25-12PWT-W1 | 12  | 13.75 | 16.35 | 18.30 | 6.50 |
| WAFER-GH1.25-13PWT-W1 | 13  | 15.00 | 17.60 | 19.55 | 6.50 |
| WAFER-GH1.25-14PWT-W1 | 14  | 16.25 | 18.85 | 20.80 | 6.50 |
| WAFER-GH1.25-15PWT-W1 | 15  | 17.50 | 20.10 | 22.05 | 6.50 |
| WAFER-GH1.25-16PWT-W1 | 16  | 18.75 | 21.35 | 23.30 | 6.50 |


WAFER-GH1.25-□□PWT-W1 (-P=盘装, 非盘装不启用)

Specifications/技术规格:

- 1.Poles/线数: 2~16P
- 2.Wire range/适用线规: AGW 32#~28#
- 3.Applicable PC board thickness/适用PC板厚度: 0.6~1.2mm
- 4.Current rating/额定电流: 1.0A
- 5.Voltage rating/额定电压: 125V DC/AC
- 6.Insulation Resistance/绝缘电阻: 100MΩ Min
- 7.Dielectric Withstanding/ 耐压: 500V AC/minute
- 8.Contact Resistance/ 接触电阻: 20mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

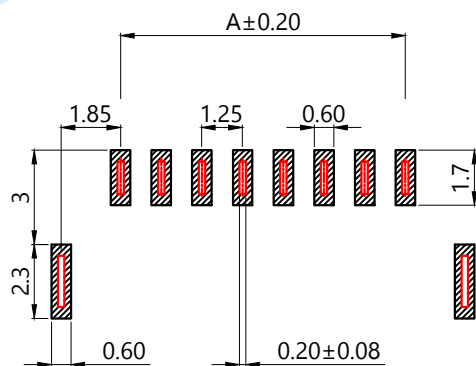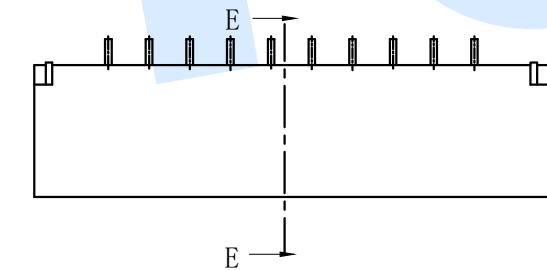

适用线路板 (PCB LAYOUT)

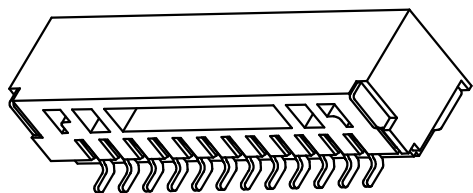

|     |               |        |     |                    |            |
|-----|---------------|--------|-----|--------------------|------------|
| Ⓒ   | Soldering lug |        | 1   | Phosphorous copper | Plating Sn |
| Ⓑ   | Terminal      |        |     | Phosphorous copper | Plating Sn |
| Ⓐ   | Housing       |        | 1   | LCP                | Off White  |
| NO. | Name          | Number | Qty | Materil            | Remarks    |

YUANDI® Yuandi Electronics Co, Ltd  
元迪

|          |      |       |                       |
|----------|------|-------|-----------------------|
| design   | date | name  | WAFER CONNECTOR       |
| Review   | date | model | WAFER-GH1.25-□□PWT-W1 |
| Approved | date |       |                       |

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved Tolerance not specified

angle ±2' 10~30 ±0.30 5~10 ±0.20 ~5 ±0.10

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Yuandi](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)  
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)  
[821-22-002-10-001101](#) [821-22-003-10-002101](#)