


# HB 系列 SERIES



- 保证 105℃、3000 小时寿命。(叠加纹波电流)  
Endurance with ripple current: 3000 hours at 105℃
- 额定工作电压范围: 16V~550V  
Rated voltage range: 16V-550V
- 适合转换太阳能光伏、电源及通用变频器等平滑用。  
Ideal for the solar energy、switching power and inverter smoothing capacitors.




## ◆ 规格表 SPECIFICATIONS

项目 Items	特性 Characteristics																															
工作温度范围 Operating Temperature Range	-40~+105℃	-25~+105℃																														
额定工作电压范围 Rated Working Voltage Range	16~100V	160~550V																														
静电容量允许偏差 Capacitance Tolerance	±20% (20℃, 120Hz)																															
损耗角正切值 Dissipation Factor (MAX) 20℃, 120Hz	<table border="1"> <tr> <td>U<sub>R</sub>(V)</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> <td>160~250</td> <td>350~400</td> <td>450~550</td> </tr> <tr> <td>tanδ</td> <td>0.50</td> <td>0.45</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.15</td> <td>0.18</td> <td>0.20</td> </tr> </table>										U <sub>R</sub> (V)	16	25	35	50	63	80	100	160~250	350~400	450~550	tanδ	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.15	0.18	0.20
U <sub>R</sub> (V)	16	25	35	50	63	80	100	160~250	350~400	450~550																						
tanδ	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.15	0.18	0.20																						
阻抗比 Impedance Ratio (MAX) 120Hz	<table border="1"> <tr> <td>U<sub>R</sub>(V)</td> <td>16~100</td> <td>160~200</td> <td>250</td> <td>350~400</td> <td>450~550</td> </tr> <tr> <td>Z<sub>25℃/Z+20℃</sub></td> <td>4</td> <td>3</td> <td>4</td> <td>7</td> <td>8</td> </tr> <tr> <td>Z<sub>40℃/Z+20℃</sub></td> <td>18</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>										U <sub>R</sub> (V)	16~100	160~200	250	350~400	450~550	Z <sub>25℃/Z+20℃</sub>	4	3	4	7	8	Z <sub>40℃/Z+20℃</sub>	18								
U <sub>R</sub> (V)	16~100	160~200	250	350~400	450~550																											
Z <sub>25℃/Z+20℃</sub>	4	3	4	7	8																											
Z <sub>40℃/Z+20℃</sub>	18																															
漏电流 Leakage Current (MAX)	I=0.01C <sub>R</sub> U <sub>R</sub> 或 1.5mA 取小者 (20℃, 施加额定电压 5 分钟后) I=0.01C <sub>R</sub> U <sub>R</sub> or 1.5mA whichever is minimum. (at 20℃, After 5 minutes application of rated voltage) I=漏电流 (µA)      U <sub>R</sub> =额定电压 (V)      C <sub>R</sub> =静电容量 (µF) Leakage Current      Rated Voltage      Rated Capacitance																															

	使用寿命 Useful Life	负荷寿命 Load Life	耐久性特性 Endurance Test	高温无负荷特性 Shelf Life
产品寿命 Life Time	5000h	>180000h	3000h	1000h
漏电流 Leakage Current	≤规定值 ≤Specified value	≤规定值 ≤Specified value	≤规定值 ≤Specified value	≤规定值 ≤Specified value
损耗角正切值变化率 tanδ change	≤规定值的 300% ≤300% of specified value	≤规定值的 200% ≤200% of specified value	≤规定值的 200% ≤200% of specified value	≤规定值的 200% ≤200% of specified value
静电容量变化率 Capacitance Change	初始值±30%以内 Within±30% of initial value	初始值±20%以内 Within±20% of initial value	初始值±20%以内 Within±20% of initial value	初始值±20%以内 Within±20% of initial value
施加条件 Condition 施加电压 Applied Voltage 施加纹波电流 Applied Ripple Current 环境温度 Applied Temperature 失效等级 Failure Rate Level	U <sub>R</sub> I <sub>R</sub> 105℃ ≤1% Failure rate	U <sub>R</sub> 1.4×I <sub>R</sub> 40℃ ≤1% Failure rate	U <sub>R</sub> I <sub>R</sub> =0 105℃ 0%	U <sub>R</sub> =0 I <sub>R</sub> =0 105℃ 0% Back up to 20℃ and placed more than 24 hours. U <sub>R</sub> to be applied for 60 min before measurement.


## ◆ 尺寸图 Dimensions

- 常用端子型式代码: Terminal Code

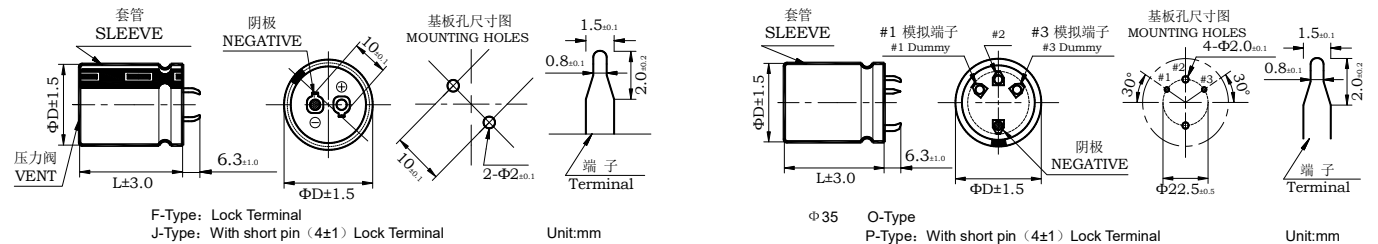

- 记载以外的端子形状, 请另行咨询。Please consult to us for the terminal type not displayed in content.

## ◆ 产品编码体系 PART NUMBER SYSTEM

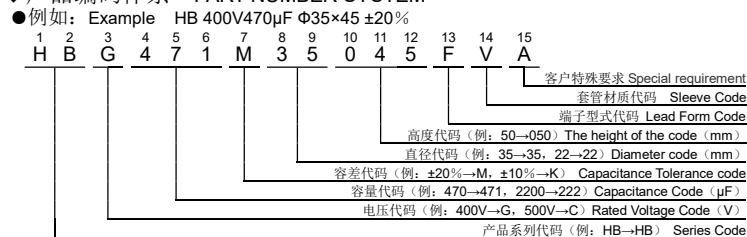

## ◆ 纹波电流修正系数 Rated Ripple Current Multiplies

● 频率修正系数 Frequency coefficient

电压范围 (V) Rated voltage	频率 (Hz) Frequency				
	50 (60)	100 (120)	300	1k	≥10k
16~50WV	0.90	1.00	1.10	1.15	1.15
63~100WV	0.85	1.00	1.17	1.32	1.45
160~550WV	0.80	1.00	1.16	1.30	1.41

● 温度修正系数 Temperature coefficient

电压范围 (V) Rated voltage	温度 (℃) Temperature				
	+40	+55	+70	+85	+105
16~550WV	2.7	2.5	2.1	1.7	1.0

# HB 系列 SERIES

## ◆ 产品一览表 Standard Ratings

WV <sub>DC</sub> (Surge Voltage) (V)	Cap (μF)	Size D×L (mm)	tanδ 20℃ 120Hz	Ripple Current 105℃ 120Hz (Arms)	Catalog Part Number
16 (20)	6800	22×25	0.50	2.25	HBV682M22025□VA
	8200	25×25	0.50	2.43	HBV822M25025□VA
	10000	22×30	0.50	2.79	HBV103M22030□VA
	10000	25×25	0.50	2.79	HBV103M25025□VA
	12000	22×35	0.50	2.90	HBV123M22035□VA
	12000	25×30	0.50	2.90	HBV123M25030□VA
	12000	30×25	0.50	2.90	HBV123M30025□VA
	15000	22×40	0.50	3.20	HBV153M22040□VA
	15000	25×35	0.50	3.20	HBV153M25035□VA
	18000	22×45	0.50	3.50	HBV183M22045□VA
	18000	25×40	0.50	3.50	HBV183M25040□VA
	18000	30×30	0.50	3.50	HBV183M30030□VA
	18000	35×25	0.50	3.50	HBV183M35025□VA
	22000	25×45	0.50	3.80	HBV223M25045□VA
	22000	30×35	0.50	3.80	HBV223M30035□VA
	27000	25×50	0.50	4.20	HBV273M25050□VA
	27000	30×40	0.50	4.20	HBV273M30040□VA
	27000	35×30	0.50	4.20	HBV273M35030□VA
	33000	30×45	0.50	4.70	HBV333M30045□VA
	33000	35×35	0.50	4.70	HBV333M35035□VA
39000	30×50	0.50	5.10	HBV393M30050□VA	
39000	35×35	0.50	5.10	HBV393M35035□VA	
47000	35×40	0.50	5.55	HBV473M35040□VA	
56000	30×60	0.50	5.90	HBV563M30060□VA	
56000	35×45	0.50	5.90	HBV563M35045□VA	
68000	35×55	0.50	6.30	HBV683M35055□VA	
82000	35×60	0.50	6.40	HBV823M35060□VA	
25 (32)	4700	22×25	0.45	2.04	HBU472M22025□VA
	5600	25×25	0.45	2.23	HBU562M25025□VA
	6800	22×30	0.45	2.40	HBU682M22030□VA
	6800	25×25	0.45	2.40	HBU682M25025□VA
	8200	22×35	0.45	2.70	HBU822M22035□VA
	8200	25×30	0.45	2.70	HBU822M25030□VA
	8200	30×25	0.45	2.70	HBU822M30025□VA
	10000	22×40	0.45	3.00	HBU103M22040□VA
	10000	25×35	0.45	3.00	HBU103M25035□VA
	12000	22×45	0.45	3.20	HBU123M22045□VA
	12000	25×40	0.45	3.20	HBU123M25040□VA
	12000	30×30	0.45	3.20	HBU123M30030□VA
	12000	35×25	0.45	3.20	HBU123M35025□VA
	15000	25×45	0.45	3.60	HBU153M25045□VA
	15000	30×35	0.45	3.60	HBU153M30035□VA
	15000	35×30	0.45	3.60	HBU153M35030□VA
	18000	25×50	0.45	3.90	HBU183M25050□VA
	18000	30×40	0.45	3.90	HBU183M30040□VA
	18000	35×30	0.45	3.90	HBU183M35030□VA
	22000	30×45	0.45	4.30	HBU223M30045□VA
22000	35×35	0.45	4.30	HBU223M35035□VA	
27000	30×50	0.45	4.80	HBU273M30050□VA	
27000	35×45	0.45	4.80	HBU273M35045□VA	
33000	35×50	0.45	5.55	HBU333M35050□VA	
35 (44)	3300	22×25	0.40	1.94	HBT332M22025□VA
	3900	22×30	0.40	2.02	HBT392M22030□VA
	4700	25×25	0.40	2.20	HBT472M25025□VA
	5600	22×35	0.40	2.40	HBT562M22035□VA
	5600	25×30	0.40	2.40	HBT562M25030□VA
	5600	30×25	0.40	2.40	HBT562M30025□VA
	6800	22×40	0.40	2.78	HBT682M22040□VA

WV <sub>DC</sub> (Surge Voltage) (V)	Cap (μF)	Size D×L (mm)	tanδ 20℃ 120Hz	Ripple Current 105℃ 120Hz (Arms)	Catalog Part Number	
35 (44)	6800	25×35	0.40	2.78	HBT682M25035□VA	
	8200	22×50	0.40	2.90	HBT822M22050□VA	
	8200	25×40	0.40	2.90	HBT822M25040□VA	
	8200	30×30	0.40	2.90	HBT822M30030□VA	
	8200	35×25	0.40	2.90	HBT822M35025□VA	
	10000	25×45	0.40	3.20	HBT103M25045□VA	
	10000	30×35	0.40	3.20	HBT103M30035□VA	
	12000	25×50	0.40	3.50	HBT123M25050□VA	
	12000	30×40	0.40	3.50	HBT123M30040□VA	
	12000	35×30	0.40	3.50	HBT123M35030□VA	
	15000	30×45	0.40	3.90	HBT153M30045□VA	
	15000	35×35	0.40	3.90	HBT153M35035□VA	
	18000	35×40	0.40	4.51	HBT183M35040□VA	
	22000	35×50	0.40	5.24	HBT223M35050□VA	
	27000	35×55	0.40	5.60	HBT273M35055□VA	
	50 (63)	1800	22×25	0.35	1.53	HBR182M22025□VA
		2200	22×30	0.35	1.72	HBR222M22030□VA
		2700	22×30	0.35	1.82	HBR272M22030□VA
		2700	25×25	0.35	1.80	HBR272M25025□VA
		3300	22×35	0.35	2.01	HBR332M22035□VA
3300		25×30	0.35	2.01	HBR332M25030□VA	
3900		22×40	0.35	2.23	HBR392M22040□VA	
3900		25×35	0.35	2.23	HBR392M25035□VA	
3900		30×25	0.35	2.23	HBR392M30025□VA	
4700		22×45	0.35	2.50	HBR472M22045□VA	
4700		30×30	0.35	2.50	HBR472M30030□VA	
4700		35×25	0.35	2.50	HBR472M35025□VA	
5600		22×50	0.35	2.80	HBR562M22050□VA	
5600		25×40	0.35	2.80	HBR562M25040□VA	
5600		30×35	0.35	2.80	HBR562M30035□VA	
6800		25×50	0.35	3.30	HBR682M25050□VA	
6800		30×40	0.35	3.30	HBR682M30040□VA	
6800		35×30	0.35	3.30	HBR682M35030□VA	
8200		30×45	0.35	3.85	HBR822M30045□VA	
8200		35×35	0.35	3.85	HBR822M35035□VA	
10000	30×50	0.35	4.49	HBR103M30050□VA		
10000	35×40	0.35	4.49	HBR103M35040□VA		
12000	35×45	0.35	4.56	HBR123M35045□VA		
15000	35×50	0.35	4.80	HBR153M35050□VA		
18000	35×60	0.35	5.10	HBR183M35060□VA		
63 (79)	1200	22×25	0.30	1.40	HBQ122M22025□VA	
	1500	22×25	0.30	1.52	HBQ152M22025□VA	
	1800	22×30	0.30	1.72	HBQ182M22030□VA	
	1800	25×25	0.30	1.72	HBQ182M25025□VA	
	2200	22×35	0.30	2.01	HBQ222M22035□VA	
	2200	25×30	0.30	2.01	HBQ222M25030□VA	
	2700	22×40	0.30	2.20	HBQ272M22040□VA	
	2700	25×35	0.30	2.20	HBQ272M25035□VA	
	2700	30×25	0.30	2.20	HBQ272M30025□VA	
	3300	22×50	0.30	2.60	HBQ332M22050□VA	
	3300	25×40	0.30	2.60	HBQ332M25040□VA	
	3300	30×30	0.30	2.60	HBQ332M30030□VA	
	3300	35×25	0.30	2.60	HBQ332M35025□VA	
	3900	25×45	0.30	2.57	HBQ392M25045□VA	
	3900	30×35	0.30	2.70	HBQ392M30035□VA	
4700	25×50	0.30	3.00	HBQ472M25050□VA		
4700	30×40	0.30	3.00	HBQ472M30040□VA		
4700	35×30	0.30	3.00	HBQ472M35030□VA		

\*产品编码中□内为产品端子引出型式代码  
\*□Enter the appropriate terminal code

# HB 系列 SERIES

## ◆ 产品一览表 Standard Ratings

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	$\tan\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number
63 (79)	5600	30×45	0.30	3.22	HBQ562M30045□VA
	5600	35×35	0.30	3.30	HBQ562M35035□VA
	6800	30×50	0.30	3.68	HBQ682M30050□VA
	6800	35×40	0.30	3.84	HBQ682M35040□VA
	8200	35×45	0.30	4.43	HBQ822M35045□VA
	10000	35×50	0.30	5.11	HBQ103M35050□VA
	12000	35×55	0.30	5.30	HBQ123M35055□VA
80 (100)	820	22×25	0.25	1.04	HBP821M22025□VA
	1000	22×25	0.25	1.19	HBP102M22025□VA
	1200	22×30	0.25	1.50	HBP122M22030□VA
	1200	25×25	0.25	1.50	HBP122M25025□VA
	1500	22×35	0.25	1.59	HBP152M22035□VA
	1500	25×30	0.25	1.59	HBP152M25030□VA
	1800	22×40	0.25	1.79	HBP182M22040□VA
	1800	30×25	0.25	1.79	HBP182M30025□VA
	2200	22×45	0.25	2.03	HBP222M22045□VA
	2200	25×35	0.25	2.10	HBP222M25035□VA
	2200	30×30	0.25	2.10	HBP222M30030□VA
	2200	35×25	0.25	2.10	HBP222M35025□VA
	2700	25×45	0.25	2.35	HBP272M25045□VA
	2700	30×35	0.25	2.35	HBP272M30035□VA
	3300	25×50	0.25	2.60	HBP332M25050□VA
	3300	30×40	0.25	2.61	HBP332M30040□VA
	3300	35×30	0.25	2.64	HBP332M35030□VA
	3900	30×45	0.25	2.97	HBP392M30045□VA
	3900	35×35	0.25	2.97	HBP392M35035□VA
	4700	30×50	0.25	3.34	HBP472M30050□VA
	4700	35×40	0.25	3.38	HBP472M35040□VA
	5600	35×45	0.25	3.80	HBP562M35045□VA
6800	35×50	0.25	3.90	HBP682M35050□VA	
8200	35×55	0.25	4.20	HBP822M35055□VA	
10000	35×60	0.25	4.48	HBP103M35060□VA	
100 (125)	560	22×25	0.20	0.95	HBO561M22025□VA
	680	22×30	0.20	1.15	HBO681M22030□VA
	820	22×30	0.20	1.40	HBO821M22030□VA
	820	25×25	0.20	1.40	HBO821M25025□VA
	1000	22×35	0.20	1.47	HBO102M22035□VA
	1000	25×30	0.20	1.47	HBO102M25030□VA
	1200	22×40	0.20	1.69	HBO122M22040□VA
	1200	25×35	0.20	1.68	HBO122M25035□VA
	1200	30×25	0.20	1.68	HBO122M30025□VA
	1500	22×45	0.20	1.97	HBO152M22045□VA
	1500	25×40	0.20	1.98	HBO152M25040□VA
	1500	30×30	0.20	1.95	HBO152M30030□VA
	1500	35×25	0.20	1.95	HBO152M35025□VA
	1800	25×45	0.20	2.20	HBO182M25045□VA
	1800	30×35	0.20	2.20	HBO182M30035□VA
	1800	35×30	0.20	2.20	HBO182M35030□VA
	2200	25×50	0.20	2.53	HBO222M25050□VA
	2200	30×40	0.20	2.55	HBO222M30040□VA
	2200	35×30	0.20	2.60	HBO222M35030□VA
	2700	30×45	0.20	2.86	HBO272M30045□VA
	2700	35×35	0.20	2.90	HBO272M35035□VA
	3300	30×50	0.20	3.30	HBO332M30050□VA
3300	35×40	0.20	3.30	HBO332M35040□VA	
3900	35×45	0.20	3.67	HBO392M35045□VA	
4700	35×50	0.20	3.80	HBO472M35050□VA	
5600	35×60	0.20	4.05	HBO562M35060□VA	

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	$\tan\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number	
160 (200)	330	22×25	0.15	1.20	HBN331M22025□VA	
	390	22×30	0.15	1.30	HBN391M22030□VA	
	470	22×35	0.15	1.55	HBN471M22035□VA	
	470	25×25	0.15	1.55	HBN471M25025□VA	
	560	22×40	0.15	1.67	HBN561M22040□VA	
	560	25×30	0.15	1.67	HBN561M25030□VA	
	680	22×45	0.15	1.82	HBN681M22045□VA	
	680	25×35	0.15	1.82	HBN681M25035□VA	
	680	30×25	0.15	1.82	HBN681M30025□VA	
	820	22×50	0.15	2.04	HBN821M22050□VA	
	820	25×40	0.15	2.04	HBN821M25040□VA	
	820	30×30	0.15	2.04	HBN821M30030□VA	
	820	35×25	0.15	2.04	HBN821M35025□VA	
	1000	25×45	0.15	2.40	HBN102M25045□VA	
	1000	30×35	0.15	2.25	HBN102M30035□VA	
	1200	25×50	0.15	2.49	HBN122M25050□VA	
	1200	30×40	0.15	2.49	HBN122M30040□VA	
	1200	35×30	0.15	2.49	HBN122M35030□VA	
	1500	30×45	0.15	2.84	HBN152M30045□VA	
	1500	35×35	0.15	2.84	HBN152M35035□VA	
	1800	35×45	0.15	3.32	HBN182M35045□VA	
	2200	35×50	0.15	3.60	HBN222M35050□VA	
	2700	35×60	0.15	4.16	HBN272M35060□VA	
	200 (250)	220	22×25	0.15	1.00	HBL221M22025□VA
		330	22×30	0.15	1.25	HBL331M22030□VA
		330	25×25	0.15	1.25	HBL331M25025□VA
		390	22×35	0.15	1.35	HBL391M22035□VA
470		22×40	0.15	1.50	HBL471M22040□VA	
470		25×30	0.15	1.50	HBL471M25030□VA	
470		30×25	0.15	1.50	HBL471M30025□VA	
560		22×45	0.15	1.67	HBL561M22045□VA	
560		25×35	0.15	1.60	HBL561M25035□VA	
680		22×50	0.15	1.78	HBL681M22050□VA	
680		25×40	0.15	1.78	HBL681M25040□VA	
680		30×30	0.15	1.78	HBL681M30030□VA	
680		35×25	0.15	1.78	HBL681M35025□VA	
820		25×50	0.15	2.00	HBL821M25050□VA	
820		30×35	0.15	2.04	HBL821M30035□VA	
820		35×30	0.15	2.00	HBL821M35030□VA	
1000		30×45	0.15	2.30	HBL102M30045□VA	
1000		35×35	0.15	2.30	HBL102M35035□VA	
1200		30×50	0.15	2.65	HBL122M30050□VA	
1200		35×40	0.15	2.65	HBL122M35040□VA	
1500		35×45	0.15	3.12	HBL152M35045□VA	
1800		35×50	0.15	3.50	HBL182M35050□VA	
2200		35×60	0.15	4.32	HBL222M35060□VA	
250 (300)		180	22×25	0.15	0.90	HBJ181M22025□VA
		220	22×30	0.15	1.00	HBJ221M22030□VA
		220	25×25	0.15	1.00	HBJ221M25025□VA
		270	22×35	0.15	1.18	HBJ271M22035□VA
	330	22×40	0.15	1.30	HBJ331M22040□VA	
	330	25×30	0.15	1.30	HBJ331M25030□VA	
	330	30×25	0.15	1.30	HBJ331M30025□VA	
	390	22×45	0.15	1.49	HBJ391M22045□VA	
	390	25×35	0.15	1.49	HBJ391M25035□VA	
	470	22×50	0.15	1.65	HBJ471M22050□VA	
	470	25×40	0.15	1.65	HBJ471M25040□VA	
	470	30×30	0.15	1.65	HBJ471M30030□VA	

\*产品编码中□内为产品端子引出型式代码  
\*□Enter the appropriate terminal code

# HB 系列 SERIES

## ◆ 产品一览表 Standard Ratings

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	$\tan\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number
250 (300)	470	35×25	0.15	1.65	HBH471M35025□VA
	560	25×45	0.15	1.80	HBH561M25045□VA
	560	30×35	0.15	1.80	HBH561M30035□VA
	560	35×30	0.15	1.80	HBH561M35030□VA
	680	25×50	0.15	2.00	HBH681M25050□VA
	680	30×40	0.15	2.00	HBH681M30040□VA
	820	30×45	0.15	2.30	HBH821M30045□VA
	820	35×35	0.15	2.30	HBH821M35035□VA
	1000	30×50	0.15	2.70	HBH102M30050□VA
	1000	35×40	0.15	2.70	HBH102M35040□VA
	1200	35×45	0.15	3.09	HBH122M35045□VA
350 (400)	68	22×25	0.18	0.47	HBG680M22025□VA
	100	22×30	0.18	0.60	HBH101M22030□VA
	100	25×25	0.18	0.60	HBH101M25025□VA
	120	22×35	0.18	0.70	HBH121M22035□VA
	150	22×40	0.18	0.77	HBH151M22040□VA
	150	25×30	0.18	0.78	HBH151M25030□VA
	150	30×25	0.18	0.78	HBH151M30025□VA
	180	22×45	0.18	0.87	HBH181M22045□VA
	180	25×35	0.18	0.92	HBH181M25035□VA
	180	30×30	0.18	0.90	HBH181M30030□VA
	220	22×50	0.18	1.04	HBH221M22050□VA
	220	25×40	0.18	1.04	HBH221M25040□VA
	220	35×25	0.18	1.04	HBH221M35025□VA
	270	25×50	0.18	1.28	HBH271M25050□VA
	270	30×35	0.18	1.26	HBH271M30035□VA
	270	35×30	0.18	1.24	HBH271M35030□VA
	330	30×45	0.18	1.32	HBH331M30045□VA
	330	35×35	0.18	1.32	HBH331M35035□VA
	390	30×50	0.18	1.64	HBH391M30050□VA
	390	35×40	0.18	1.64	HBH391M35040□VA
	470	30×50	0.18	1.78	HBH471M30050□VA
	470	35×45	0.18	1.86	HBH471M35045□VA
	560	30×60	0.18	2.10	HBH561M30060□VA
	560	35×50	0.18	2.10	HBH561M35050□VA
	680	35×55	0.18	2.36	HBH681M35055□VA
	820	35×60	0.18	2.70	HBH821M35060□VA
	1000	35×60	0.18	3.06	HBH102M35060□VA
1000	35×65	0.18	3.10	HBH102M35065□VA	
1000	40×55	0.18	3.10	HBH102M40055□VA	
1200	35×75	0.18	3.80	HBH122M35075□VA	
1200	40×65	0.18	3.86	HBH122M40065□VA	
1500	40×80	0.18	4.56	HBH152M40080□VA	
1500	45×65	0.18	4.36	HBH152M45065□VA	
1800	40×95	0.18	5.32	HBH182M40095□VA	
1800	45×75	0.18	5.14	HBH182M45075□VA	
2200	45×90	0.18	5.90	HBH222M45090□VA	
2200	50×75	0.18	5.70	HBH222M50075□VA	
2700	45×100	0.18	6.80	HBH272M45100□VA	
2700	50×90	0.18	6.90	HBH272M50090□VA	
3300	50×105	0.18	8.00	HBH332M50105□VA	
400 (450)	68	22×25	0.18	0.58	HBE680M22025□VA
	82	22×30	0.18	0.68	HBE820M22030□VA
	82	25×25	0.18	0.68	HBE820M25025□VA
	100	22×30	0.18	0.74	HBE101M22030□VA
	100	25×25	0.18	0.74	HBE101M25025□VA
	120	22×35	0.18	0.80	HBE121M22035□VA
	120	25×30	0.18	0.80	HBE121M25030□VA

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	$\tan\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number
400 (450)	120	30×25	0.18	0.80	HBE121M30025□VA
	150	22×40	0.18	0.84	HBE151M22040□VA
	150	25×35	0.18	0.86	HBE151M25035□VA
	150	30×25	0.18	0.86	HBE151M30025□VA
	180	22×50	0.18	1.00	HBE181M22050□VA
	180	25×40	0.18	1.02	HBE181M25040□VA
	180	30×30	0.18	1.02	HBE181M30030□VA
	180	35×25	0.18	1.02	HBE181M35025□VA
	220	25×45	0.18	1.10	HBE221M25045□VA
	220	30×35	0.18	1.08	HBE221M30035□VA
	220	35×25	0.18	1.14	HBE221M35025□VA
	270	25×50	0.18	1.34	HBE271M25050□VA
	270	30×40	0.18	1.26	HBE271M30040□VA
	270	35×30	0.18	1.26	HBE271M35030□VA
	330	30×45	0.18	1.60	HBE331M30045□VA
	330	35×35	0.18	1.54	HBE331M35035□VA
	390	30×50	0.18	1.66	HBE391M30050□VA
	390	35×40	0.18	1.66	HBE391M35040□VA
	470	30×50	0.18	1.96	HBE471M30050□VA
	470	35×45	0.18	1.96	HBE471M35045□VA
	560	35×50	0.18	2.16	HBE561M35050□VA
	680	35×60	0.18	2.36	HBE681M35060□VA
	820	35×65	0.18	2.90	HBE821M35065□VA
	820	40×55	0.18	3.10	HBE821M40055□VA
	1000	35×80	0.18	3.50	HBE102M35080□VA
	1000	40×65	0.18	3.40	HBE102M40065□VA
	1200	35×90	0.18	4.00	HBE122M35090□VA
1200	40×80	0.18	4.10	HBE122M40080□VA	
1200	45×60	0.18	3.90	HBE122M45060□VA	
1500	40×90	0.18	4.40	HBE152M40090□VA	
1500	45×75	0.18	4.60	HBE152M45075□VA	
1500	50×70	0.18	4.90	HBE152M50070□VA	
1800	45×90	0.18	5.60	HBE182M45090□VA	
1800	50×80	0.18	5.60	HBE182M50080□VA	
2200	50×90	0.18	6.40	HBE222M50090□VA	
2700	50×105	0.18	7.20	HBE272M50105□VA	
450 (500)	56	22×25	0.20	0.50	HBE560M22025□VA
	68	22×30	0.20	0.60	HBE680M22030□VA
	68	25×25	0.20	0.60	HBE680M25025□VA
	82	22×35	0.20	0.70	HBE820M22035□VA
	82	25×30	0.20	0.70	HBE820M25030□VA
	100	22×40	0.20	0.74	HBE101M22040□VA
	100	25×30	0.20	0.74	HBE101M25030□VA
	100	30×25	0.20	0.82	HBE101M30025□VA
	120	22×45	0.20	0.80	HBE121M22045□VA
	120	25×35	0.20	0.80	HBE121M25035□VA
	120	30×30	0.20	0.80	HBE121M30030□VA
	150	22×50	0.20	0.84	HBE151M22050□VA
	150	25×40	0.20	0.88	HBE151M25040□VA
	150	30×30	0.20	0.88	HBE151M30030□VA
	150	35×25	0.20	0.88	HBE151M35025□VA
	180	25×45	0.20	1.00	HBE181M25045□VA
	180	30×35	0.20	1.00	HBE181M30035□VA
180	35×30	0.20	1.04	HBE181M35030□VA	
220	25×50	0.20	1.12	HBE221M25050□VA	
220	30×40	0.20	1.12	HBE221M30040□VA	
220	35×30	0.20	1.12	HBE221M35030□VA	
270	30×45	0.20	1.28	HBE271M30045□VA	

\*产品编码中□内为产品端子引出型式代码

\*□Enter the appropriate terminal code

# HB 系列 SERIES

## ◆ 产品一览表 Standard Ratings

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	tan $\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number
450 (500)	270	35×35	0.20	1.28	HBE271M35035□VA
	330	30×50	0.20	1.38	HBE331M30050□VA
	330	35×40	0.20	1.46	HBE331M35040□VA
	390	30×60	0.20	1.66	HBE391M30060□VA
	390	35×45	0.20	1.66	HBE391M35045□VA
	470	35×50	0.20	1.88	HBE471M35050□VA
	560	35×60	0.20	2.16	HBE561M35060□VA
	680	35×65	0.20	2.60	HBE681M35065□VA
	680	40×60	0.20	2.80	HBE681M40060□VA
	820	35×75	0.20	3.10	HBE821M35075□VA
	820	40×65	0.20	3.20	HBE821M40065□VA
	1000	35×90	0.20	3.66	HBE102M35090□VA
	1000	40×80	0.20	3.76	HBE102M40080□VA
	1200	40×95	0.20	4.50	HBE122M40095□VA
	1200	45×75	0.20	4.30	HBE122M45075□VA
	1200	50×65	0.20	4.30	HBE122M50065□VA
	1500	40×100	0.20	4.80	HBE152M40100□VA
	1500	45×90	0.20	5.10	HBE152M45090□VA
	1500	50×80	0.20	5.20	HBE152M50080□VA
	1800	50×95	0.20	5.80	HBE182M50095□VA
2200	50×110	0.20	6.70	HBE222M50110□VA	
500 (550)	47	22×30	0.20	0.46	HBC470M22030□VA
	56	22×40	0.20	0.46	HBC560M22040□VA
	68	22×45	0.20	0.60	HBC680M22045□VA
	68	25×30	0.20	0.60	HBC680M25030□VA
	82	22×50	0.20	0.68	HBC820M22050□VA
	82	25×40	0.20	0.68	HBC820M25040□VA
	100	22×45	0.20	0.72	HBC101M22045□VA
	100	25×40	0.20	0.72	HBC101M25040□VA
	100	30×30	0.20	0.70	HBC101M30030□VA
	120	22×50	0.20	0.80	HBC121M22050□VA
	120	25×40	0.20	0.80	HBC121M25040□VA
	120	30×35	0.20	0.80	HBC121M30035□VA
	120	35×30	0.20	0.80	HBC121M35030□VA
	150	25×45	0.20	0.86	HBC151M25045□VA
	150	30×40	0.20	0.90	HBC151M30040□VA
	150	35×35	0.20	0.90	HBC151M35035□VA
	180	25×50	0.20	1.00	HBC181M25050□VA
	180	30×45	0.20	1.02	HBC181M30045□VA
	220	30×50	0.20	1.18	HBC221M30050□VA
	220	35×40	0.20	1.18	HBC221M35040□VA
	270	30×55	0.20	1.36	HBC271M30055□VA
	270	35×50	0.20	1.36	HBC271M35050□VA
	330	35×60	0.20	1.66	HBC331M35060□VA
	390	35×60	0.20	1.80	HBC391M35060□VA
	470	35×60	0.20	2.20	HBC471M35060□VA
	560	35×65	0.20	2.40	HBC561M35065□VA
	560	40×55	0.20	2.40	HBC561M40055□VA
	680	35×75	0.20	2.80	HBC681M35075□VA
680	40×70	0.20	2.90	HBC681M40070□VA	
820	40×75	0.20	3.30	HBC821M40075□VA	

WV <sub>DC</sub> (Surge Voltage) (V)	Cap ( $\mu$ F)	Size D×L (mm)	tan $\delta$ 20°C 120Hz	Ripple Current 105°C 120Hz (Arms)	Catalog Part Number
500 (550)	820	45×60	0.20	3.20	HBC821M45060□VA
	1000	40×90	0.20	3.90	HBC102M40090□VA
	1000	45×75	0.20	3.80	HBC102M45075□VA
	1200	40×100	0.20	4.40	HBC122M40100□VA
	1200	45×85	0.20	4.30	HBC122M45085□VA
	1500	45×100	0.20	5.00	HBC152M45100□VA
	1500	50×90	0.20	5.10	HBC152M50090□VA
	1800	50×105	0.20	5.90	HBC182M50105□VA
550 (600)	180	30×50	0.20	1.10	HBZ181M30050□VA
	220	30×60	0.20	1.30	HBZ221M30060□VA
	270	35×50	0.20	1.50	HBZ271M35050□VA
	330	35×60	0.20	1.70	HBZ331M35060□VA
	390	35×70	0.20	2.00	HBZ391M35070□VA
	390	40×60	0.20	2.00	HBZ391M40060□VA
	470	35×80	0.20	2.40	HBZ471M35080□VA
	470	40×70	0.20	2.40	HBZ471M40070□VA
	560	35×90	0.20	2.70	HBZ561M35090□VA
	560	40×80	0.20	2.70	HBZ561M40080□VA
	680	40×90	0.20	3.10	HBZ681M40090□VA
	680	45×70	0.20	3.00	HBZ681M45070□VA
	820	45×85	0.20	3.50	HBZ821M45085□VA
	820	50×70	0.20	3.40	HBZ821M50070□VA
	1000	45×100	0.20	4.10	HBZ102M45100□VA
	1000	50×80	0.20	3.90	HBZ102M50080□VA
1200	50×90	0.20	4.60	HBZ122M50090□VA	

\*产品编码中□内为产品端子引出型式代码

\*□Enter the appropriate terminal code

\*记载之外的体积，请另行咨询。

\* Please ask for advice for other sizes.

\*铝电解电容器由于承受纹波电流而发热，随着温升而发生性能劣化。请在使用中降低产品承受的纹波电流。

\*Aluminum electrolytic capacitor will emit heat when ripple current is applied, the performance will deteriorate when temp. rises. Please reduce the ripple current when using capacitor.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [Zeasset](#) manufacturer:*

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)  
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)  
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)  
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)  
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)  
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)  
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)  
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)  
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)