


TA系列 SERIES



- 全焊结构，确保可靠的电气接触性
All-welded construction ensures reliable electrical contact
- 额定工作电压750V以下
Working voltage below 750V
- 保证85°C、2000小时寿命。(叠加纹波电流)
Endurance with ripple current: 2000 hours at 85°C
- 应用：变频器、不间断电源和电焊机
Application: Frequency converters, Uninterruptible power supplies and Electric welding machine




规格表 SPECIFICATIONS

项目 Items	特性 Characteristics															
工作温度范围 Operating	- 40 ~ +85°C	- 25 ~ +85°C														
额定工作电压范围 Rated	10 ~ 250V	350 ~ 750V														
静电容量范围	820 ~ 820000μF															
静电容量允许偏差 Capacitance Tolerance	±20% (20°C,120Hz)															
损耗角正切值 Dissipation Factor (MAX) 20°C, 120Hz	<table border="1"> <tr> <td>(V)</td> <td>10-100</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> <td>500</td> <td>550</td> <td>600</td> <td>650</td> <td>700</td> <td>750</td> </tr> </table>		(V)	10-100	160	200	250	350	400	450	500	550	600	650	700	750
(V)	10-100	160	200	250	350	400	450	500	550	600	650	700	750			
漏电流 Leakage Current (MAX)	$I = 0.01C_R U_R$ 或 5mA 取小者 (20°C, 施加额定电压5分钟后) $I = 0.01C_R U_R$ or 5mA whichever is minimum. (at 20°C, After 5 minutes application of rated voltage) I = 漏电流 (μA) U_R = 额定电压 (V) C_R = 静电容量 (μF) Leakage Current Rated Voltage Rated Capacitance															

	使用寿命 Useful Life	负荷寿命 Load Life	耐久性特性 Endurance Test	高温无负荷特性 Shelf Life
产品寿命 Life Time	4000h	>65000h	2000h	1000h $U_R \leq 550V$ 500h $U_R \geq 600V$
漏电流 Leakage Current	≤规定值 ≤Specified value	≤规定值 ≤Specified value	≤规定值 ≤Specified value	≤规定值 ≤Specified value
损耗角正切值变化率 tanδ Change	≤规定值的300% ≤300% of specified value	≤规定值的175% ≤175% of specified value	≤规定值的130% ≤130% of specified value	≤规定值的150% ≤150% of specified value
静电容量变化率 Capacitance Change	初始值±30%以内 Within ±30% of initial value	初始值±15%以内 Within ±15% of initial value	初始值±10%以内 Within ±10% of initial value	初始值±15%以内 Within ±15% of initial value
施加条件 Condition 施加电压 Applied Voltage 施加纹波电流 Applied Ripple Current 环境温度 Applied Temperature 失效率等级 Failure Rate Level	I_R 85°C ≤1% Failure rate	$1.2 \times I_R$ 40°C ≤1% Failure rate	I_R 85°C 0%	$I_R=0$ 85°C 0% Back up to 20°C and placed more than 24 hours, to be applied for 60 min before measurement.

尺寸图 Dimensions

- 常用端子型式代码：Terminal Code

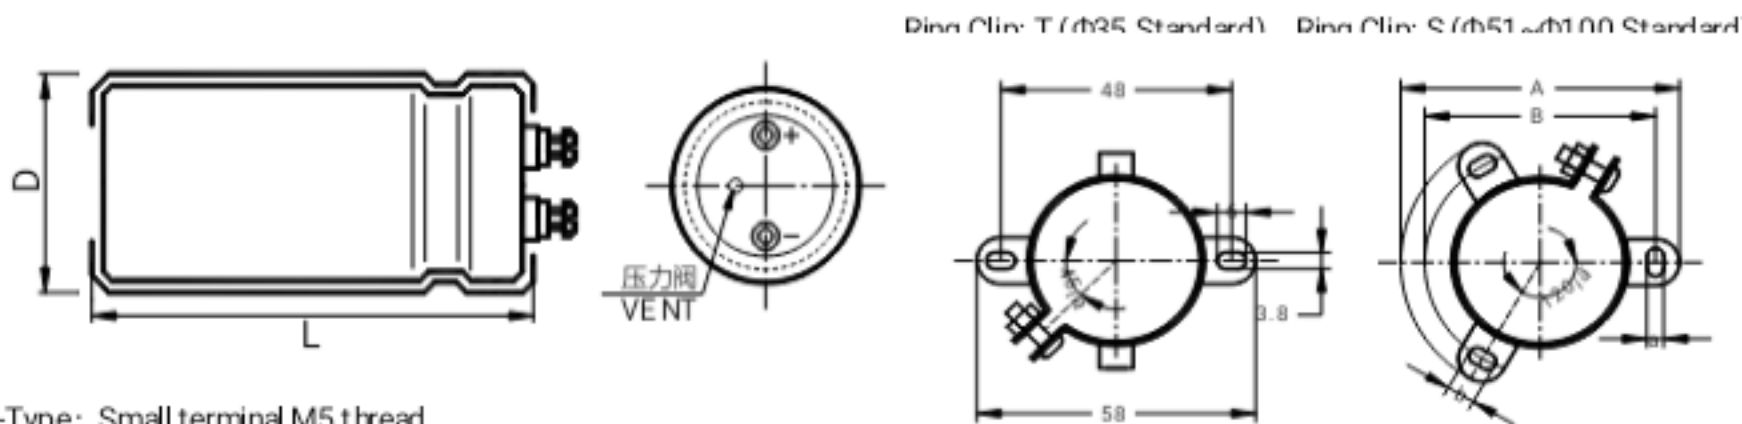


Ring Clip Dimensions:

ΦD	A	B	a	b
51	73.0	63.5	4.5	7
64	85.1	76.2	4.5	7
76	98.4	88.9	4.5	7
89	111.1	101.6	4.5	7
100	127.0	115.0	6.2	8

产品详细尺寸和公差请参照P130
For detailed dimension & tolerance, please refer to P130

- L-Type: Small terminal M5 thread
- S-Type: Large terminal, if D:76~89mm, M6 thread, if D:100mm M8 thread
- 记载以外的端子形状，请另行咨询。Please consult to us for the terminal type not displayed in content.

产品编码体系 PART NUMBER SYSTEM

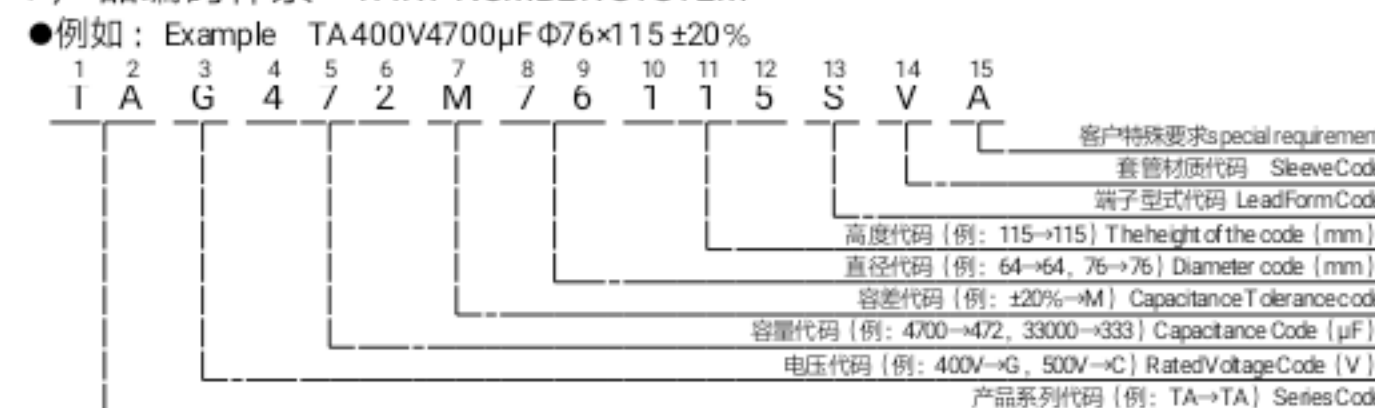

纹波电流修正系数 Rated Ripple Current Multiplies

●频率修正系数 Frequency coefficient

电压范围 (v) Rated voltage	频率 (Hz) Frequency				
	50 (60)	100 (120)	300	1k	≥10k
10 ~ 50WV	0.95	1.00	1.04	1.10	1.15
63 ~ 100WV	0.95	1.00	1.06	1.16	1.30
160 ~ 500WV	0.80	1.00	1.10	1.25	1.50
550WV ~ 750WV	0.80	1.00	1.10	1.30	1.40

●温度修正系数 Temperature coefficient

电压范围 (v) Rated voltage	温度 (°C) Temperature			
	+40	+60	+70	+85
10 ~ 500WV	2.70	2.00	1.70	1.00
550 ~ 750WV	1.89	1.67	-	1.00

◆ 产品一览表 Standard Ratings

WV _{DC} (Surge Voltage)	Cap (μ F)	Size DxL (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
10 (13)	33000	35x60	0.80	5.1	TAW333M35060□VA
	39000	35x60	0.80	5.6	TAW393M35060□VA
	47000	35x60	0.80	6.2	TAW473M35060□VA
	56000	35x80	0.80	7.3	TAW563M35080□VA
	68000	35x80	0.80	8.0	TAW683M35080□VA
	82000	35x100	0.80	9.2	TAW823M35100□VA
	100000	35x100	0.80	10.5	TAW104M35100□VA
	120000	35x120	0.80	12.0	TAW124M35120□VA
	150000	35x120	1.00	12.9	TAW154M35120□VA
	180000	51x95	1.00	13.4	TAW184M51095□VA
	220000	51x115	1.50	14.4	TAW224M51115□VA
	270000	51x115	1.50	15.3	TAW274M51115□VA
	330000	64x95	1.50	18.3	TAW334M64095□VA
	390000	64x115	1.50	20.7	TAW394M64115□VA
	470000	64x130	2.00	20.2	TAW474M64130□VA
	560000	76x115	2.00	22.8	TAW564M76115□VA
680000	76x130	2.00	26.0	TAW684M76130□VA	
820000	76x155	2.00	29.5	TAW824M76155□VA	
16 (20)	22000	35x60	0.60	4.9	TAV223M35060□VA
	27000	35x60	0.60	5.4	TAV273M35060□VA
	33000	35x60	0.60	6.0	TAV333M35060□VA
	39000	35x60	0.60	7.1	TAV393M35060□VA
	47000	35x80	0.60	7.6	TAV473M35080□VA
	56000	35x80	0.60	8.7	TAV563M35080□VA
	68000	35x100	0.60	10.0	TAV683M35100□VA
	82000	35x100	0.80	9.9	TAV823M35100□VA
	100000	35x120	0.80	11.5	TAV104M35120□VA
	120000	35x120	0.80	13.0	TAV124M35120□VA
	150000	51x95	1.00	13.5	TAV154M51095□VA
	180000	51x115	1.00	14.0	TAV184M51115□VA
	220000	51x130	1.00	18.3	TAV224M51130□VA
	270000	64x95	1.00	19.3	TAV274M64095□VA
	330000	64x115	1.50	18.4	TAV334M64115□VA
	390000	64x130	1.50	21.9	TAV394M64130□VA
470000	76x115	1.50	25.5	TAV474M76115□VA	
560000	76x130	1.50	28.3	TAV564M76130□VA	
680000	76x155	1.50	33.1	TAV684M76155□VA	
820000	89x157	2.00	32.5	TAV824M89157□VA	
25 (32)	15000	35x60	0.50	4.4	TAU153M35060□VA
	18000	35x60	0.50	4.9	TAU183M35060□VA
	22000	35x60	0.50	5.4	TAU223M35060□VA
	27000	35x60	0.50	6.0	TAU273M35060□VA
	33000	35x80	0.50	7.1	TAU333M35080□VA
	39000	35x80	0.50	8.0	TAU393M35080□VA
	47000	35x100	0.50	9.2	TAU473M35100□VA
	56000	35x100	0.60	9.4	TAU563M35100□VA
	68000	35x120	0.60	11.0	TAU683M35120□VA
	82000	35x120	0.60	12.4	TAU823M35120□VA
	100000	51x95	0.60	12.9	TAU104M51095□VA
	120000	51x115	0.80	14.5	TAU124M51115□VA
	150000	51x130	0.80	16.9	TAU154M51130□VA
	180000	64x95	0.80	18.8	TAU184M64095□VA
	220000	64x115	1.00	19.3	TAU224M64115□VA
	270000	64x130	1.00	22.3	TAU274M64130□VA
330000	64x150	1.00	26.3	TAU334M64150□VA	
390000	76x115	1.20	26.5	TAU394M76115□VA	
470000	76x155	1.20	30.2	TAU474M76155□VA	
560000	89x130	1.20	32.9	TAU564M89130□VA	

WV _{DC} (Surge Voltage)	Cap (μ F)	Size DxL (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
25(32)	680000	89x157	1.20	38.3	TAU684M89157□VA
35 (44)	10000	35x60	0.40	3.9	TAT103M35060□VA
	12000	35x60	0.40	4.2	TAT123M35060□VA
	15000	35x60	0.40	4.8	TAT153M35060□VA
	18000	35x80	0.40	5.4	TAT183M35080□VA
	22000	35x80	0.40	6.5	TAT223M35080□VA
	27000	35x100	0.40	7.2	TAT273M35100□VA
	33000	35x100	0.40	8.2	TAT333M35100□VA
	39000	35x120	0.50	9.5	TAT393M35120□VA
	47000	51x95	0.50	10.0	TAT473M51095□VA
	56000	51x95	0.60	9.8	TAT563M51095□VA
	68000	51x115	0.60	11.2	TAT683M51115□VA
	82000	64x95	0.60	13.3	TAT823M64095□VA
	100000	64x115	0.60	15.3	TAT104M64115□VA
	120000	64x115	0.80	17.0	TAT124M64115□VA
	150000	64x130	0.80	17.1	TAT154M64130□VA
	180000	76x115	0.80	19.5	TAT184M76115□VA
220000	76x130	0.80	23.0	TAT224M76130□VA	
270000	76x155	1.00	23.3	TAT274M76155□VA	
330000	89x130	1.00	27.0	TAT334M89130□VA	
390000	89x157	1.00	30.3	TAT394M89157□VA	
470000	89x157	1.00	33.9	TAT474M89157□VA	
50 (63)	5600	35x60	0.30	3.4	TAR562M35060□VA
	6800	35x60	0.30	3.7	TAR682M35060□VA
	8200	35x60	0.30	4.1	TAR822M35060□VA
	10000	35x60	0.30	4.6	TAR103M35060□VA
	12000	35x80	0.30	5.4	TAR123M35080□VA
	15000	35x80	0.30	6.3	TAR153M35080□VA
	18000	35x100	0.30	7.1	TAR183M35100□VA
	22000	35x120	0.40	7.2	TAR223M35120□VA
	27000	35x120	0.40	8.1	TAR273M35120□VA
	33000	51x95	0.40	9.4	TAR333M51095□VA
	39000	51x95	0.50	9.3	TAR393M51095□VA
	47000	51x115	0.50	10.7	TAR473M51115□VA
	56000	64x95	0.50	12.0	TAR563M64095□VA
	68000	64x95	0.50	13.8	TAR683M64095□VA
	82000	64x115	0.50	15.7	TAR823M64115□VA
	100000	76x115	0.60	16.9	TAR104M76115□VA
120000	76x115	0.60	19.2	TAR124M76115□VA	
150000	76x130	0.60	22.1	TAR154M76130□VA	
180000	76x155	0.60	25.1	TAR184M76155□VA	
220000	89x130	0.60	24.6	TAR224M89130□VA	
270000	89x157	0.60	28.6	TAR274M89157□VA	
63 (79)	3900	35x60	0.25	3.1	TAQ392M35060□VA
	4700	35x60	0.25	3.4	TAQ472M35060□VA
	5600	35x60	0.25	3.7	TAQ562M35060□VA
	6800	35x60	0.25	4.1	TAQ682M35060□VA
	8200	35x80	0.25	4.9	TAQ822M35080□VA
	10000	35x80	0.25	5.6	TAQ103M35080□VA
	12000	35x100	0.25	6.4	TAQ123M35100□VA
	15000	35x100	0.30	6.7	TAQ153M35100□VA
	18000	35x120	0.30	7.7	TAQ183M35120□VA
	22000	35x120	0.30	8.9	TAQ223M35120□VA
	27000	51x95	0.40	8.5	TAQ273M51095□VA
	33000	51x95	0.40	9.6	TAQ333M51095□VA
	39000	51x115	0.40	10.9	TAQ393M51115□VA
	47000	51x130	0.40	12.9	TAQ473M51130□VA
	56000	64x115	0.40	14.7	TAQ563M64115□VA

*产品编码中□内为产品端子引出型式代码
*□ Enter the appropriate terminal code

◆ 产品一览表 Standard Ratings

WV _{DC} (Surge Voltage)	Cap (μ F)	Size D \times L (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
63 (79)	68000	64 \times 115	0.50	15.4	TAQ683M64115□VA
	82000	64 \times 130	0.50	16.0	TAQ823M64130□VA
	100000	76 \times 115	0.50	18.4	TAQ104M76115□VA
	120000	76 \times 130	0.50	20.9	TAQ124M76130□VA
	150000	76 \times 155	0.50	24.6	TAQ154M76155□VA
	180000	89 \times 130	0.60	24.6	TAQ184M89130□VA
	220000	89 \times 157	0.60	28.8	TAQ224M89157□VA
80 (100)	3300	35 \times 60	0.25	2.8	TAP332M35060□VA
	3900	35 \times 60	0.25	3.2	TAP392M35060□VA
	4700	35 \times 60	0.25	3.4	TAP472M35060□VA
	5600	35 \times 80	0.25	4.1	TAP562M35080□VA
	6800	35 \times 80	0.25	4.4	TAP682M35080□VA
	8200	35 \times 80	0.25	5.1	TAP822M35080□VA
	10000	35 \times 100	0.25	5.9	TAP103M35100□VA
	12000	35 \times 100	0.25	6.7	TAP123M35100□VA
	15000	35 \times 120	0.25	7.8	TAP153M35120□VA
	18000	35 \times 120	0.25	8.9	TAP183M35120□VA
	22000	51 \times 95	0.30	9.2	TAP223M51095□VA
	27000	51 \times 95	0.30	10.5	TAP273M51095□VA
	33000	51 \times 115	0.30	12.0	TAP333M51115□VA
	39000	51 \times 130	0.30	13.8	TAP393M51130□VA
	47000	64 \times 115	0.30	16.6	TAP473M64115□VA
	56000	64 \times 130	0.40	15.4	TAP563M64130□VA
	68000	76 \times 115	0.40	17.7	TAP683M76115□VA
	82000	76 \times 130	0.40	19.9	TAP823M76130□VA
	100000	76 \times 155	0.40	23.1	TAP104M76155□VA
	120000	89 \times 130	0.40	24.6	TAP124M89130□VA
150000	89 \times 157	0.40	29.0	TAP154M89157□VA	
100 (125)	3300	35 \times 60	0.25	2.9	TAO332M35060□VA
	3900	35 \times 80	0.25	3.3	TAO392M35080□VA
	4700	35 \times 80	0.25	3.8	TAO472M35080□VA
	5600	35 \times 100	0.25	4.3	TAO562M35100□VA
	6800	35 \times 100	0.25	5.0	TAO682M35100□VA
	8200	35 \times 120	0.25	5.6	TAO822M35120□VA
	10000	35 \times 120	0.25	6.5	TAO103M35120□VA
	12000	51 \times 80	0.25	7.0	TAO123M51080□VA
	15000	51 \times 95	0.25	7.7	TAO153M51095□VA
	18000	51 \times 115	0.25	9.1	TAO183M51115□VA
	22000	51 \times 130	0.25	11.0	TAO223M51130□VA
	27000	64 \times 115	0.25	12.6	TAO273M64115□VA
	33000	64 \times 130	0.25	13.1	TAO333M64130□VA
	39000	76 \times 115	0.25	14.7	TAO393M76115□VA
	47000	76 \times 130	0.35	15.7	TAO473M76130□VA
	56000	76 \times 155	0.35	17.6	TAO563M76155□VA
	68000	89 \times 130	0.35	20.7	TAO683M89130□VA
	82000	89 \times 157	0.35	22.6	TAO823M89157□VA
100000	89 \times 170	0.35	26.4	TAO104M89170□VA	
160 (200)	3900	51 \times 80	0.20	5.8	TAN392M51080□VA
	4700	51 \times 80	0.20	6.4	TAN472M51080□VA
	5600	51 \times 95	0.20	7.7	TAN562M51095□VA
	6800	51 \times 95	0.20	8.6	TAN682M51095□VA
	8200	51 \times 115	0.20	10.0	TAN822M51115□VA
	10000	64 \times 95	0.20	11.4	TAN103M64095□VA
	12000	64 \times 95	0.20	12.4	TAN123M64095□VA
	15000	64 \times 130	0.20	15.7	TAN153M64130□VA
	18000	64 \times 130	0.20	17.2	TAN183M64130□VA
	22000	76 \times 130	0.20	20.1	TAN223M76130□VA
27000	76 \times 130	0.20	22.2	TAN273M76130□VA	

WV _{DC} (Surge Voltage)	Cap (μ F)	Size D \times L (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
160 (200)	33000	89 \times 130	0.20	26.2	TAN333M89130□VA
	39000	89 \times 157	0.20	30.7	TAN393M89157□VA
	47000	89 \times 170	0.20	34.9	TAN473M89170□VA
	56000	89 \times 195	0.20	38.1	TAN563M89195□VA
	68000	89 \times 220	0.20	40.3	TAN683M89220□VA
	200 (250)	2200	35 \times 100	0.20	3.9
2700		35 \times 120	0.20	4.7	TAL272M35120□VA
3300		51 \times 80	0.20	5.3	TAL332M51080□VA
3900		51 \times 80	0.20	5.7	TAL392M51080□VA
4700		51 \times 95	0.20	6.4	TAL472M51095□VA
5600		51 \times 115	0.20	7.6	TAL562M51115□VA
6800		51 \times 130	0.20	8.8	TAL682M51130□VA
8200		64 \times 95	0.20	9.4	TAL822M64095□VA
10000		64 \times 95	0.20	10.5	TAL103M64095□VA
12000		76 \times 95	0.20	12.1	TAL123M76095□VA
15000		76 \times 95	0.20	14.4	TAL153M76095□VA
18000		76 \times 130	0.20	16.5	TAL183M76130□VA
22000		76 \times 155	0.20	19.6	TAL223M76155□VA
27000		89 \times 130	0.20	21.5	TAL273M89130□VA
33000		76 \times 170	0.20	24.0	TAL333M76170□VA
33000		89 \times 160	0.20	25.5	TAL333M89160□VA
36000		89 \times 160	0.20	26.8	TAL363M89160□VA
47000		89 \times 195	0.20	35.1	TAL473M89195□VA
56000		89 \times 220	0.20	39.1	TAL563M89220□VA
68000		100 \times 220	0.20	47.5	TAL683M00220□VA
250 (300)	1800	35 \times 100	0.20	3.8	TAJ182M35100□VA
	2200	51 \times 80	0.20	4.4	TAJ222M51080□VA
	2700	51 \times 80	0.20	5.0	TAJ272M51080□VA
	3300	51 \times 95	0.20	5.9	TAJ332M51095□VA
	3900	51 \times 115	0.20	6.9	TAJ392M51115□VA
	4700	64 \times 95	0.20	7.8	TAJ472M64095□VA
	5600	64 \times 95	0.20	8.6	TAJ562M64095□VA
	6800	64 \times 115	0.20	10.0	TAJ682M64115□VA
	8200	64 \times 115	0.20	11.0	TAJ822M64115□VA
	10000	64 \times 130	0.20	12.9	TAJ103M64130□VA
	12000	76 \times 115	0.20	14.3	TAJ123M76115□VA
	15000	76 \times 130	0.20	16.6	TAJ153M76130□VA
	18000	76 \times 155	0.20	19.5	TAJ183M76155□VA
	22000	89 \times 160	0.20	23.2	TAJ223M89160□VA
33000	89 \times 170	0.20	29.4	TAJ333M89170□VA	
47000	89 \times 235	0.20	39.6	TAJ473M89235□VA	
56000	100 \times 235	0.20	44.6	TAJ563M00235□VA	
350 (400)	1500	51 \times 95	0.15	5.4	TAH152M51095□VA
	1800	51 \times 95	0.15	6.0	TAH182M51095□VA
	2200	51 \times 115	0.15	7.2	TAH222M51115□VA
	2700	51 \times 130	0.15	8.4	TAH272M51130□VA
	3300	51 \times 130	0.15	8.8	TAH332M51130□VA
	3900	64 \times 115	0.15	10.9	TAH392M64115□VA
	4700	64 \times 130	0.15	12.6	TAH472M64130□VA
	5600	76 \times 115	0.15	13.7	TAH562M76115□VA
	6800	76 \times 130	0.15	15.9	TAH682M76130□VA
	8200	76 \times 155	0.15	18.9	TAH822M76155□VA
	10000	89 \times 157	0.15	21.5	TAH103M89157□VA
	12000	89 \times 157	0.15	23.6	TAH123M89157□VA
	15000	89 \times 195	0.15	26.7	TAH153M89195□VA
	18000	89 \times 235	0.15	33.4	TAH183M89235□VA
	18000	100 \times 155	0.15	31.6	TAH183M00235□VA
	22000	100 \times 220	0.15	34.5	TAH223M00220□VA
	39000	100 \times 237	0.15	47.6	TAH393M00237□VA

*产品编码中□内为产品端子引出型式代码
*Enter the appropriate terminal code

TA SERIES

◆ 产品一览表 Standard Ratings

W _{DC} (Surge Voltage)	Cap (μ F)	Size D \times L (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
400 (450)	820	35 \times 100	0.15	3.5	TAG821M35100□VA
	1000	51 \times 80	0.15	4.5	TAG102M51080□VA
	1200	51 \times 80	0.15	4.9	TAG122M51080□VA
	1500	51 \times 95	0.15	6.0	TAG152M51095□VA
	1800	51 \times 95	0.15	6.5	TAG182M51095□VA
	2200	51 \times 115	0.15	7.5	TAG222M51115□VA
	2200	51 \times 105	0.15	7.2	TAG222M51105□VA
	2200	64 \times 80	0.15	7.3	TAG222M64080□VA
	2700	64 \times 95	0.15	9.8	TAG272M64095□VA
	2700	76 \times 95	0.15	10.8	TAG272M76095□VA
	3300	64 \times 105	0.15	10.1	TAG332M64105□VA
	3300	64 \times 110	0.15	10.3	TAG332M64110□VA
	3300	64 \times 115	0.15	10.5	TAG332M64115□VA
	3300	76 \times 95	0.15	10.7	TAG332M76095□VA
	3900	64 \times 130	0.15	12.0	TAG392M64130□VA
	3900	76 \times 95	0.15	11.5	TAG392M76095□VA
	4700	76 \times 115	0.15	13.8	TAG472M76115□VA
	5600	76 \times 130	0.15	15.8	TAG562M76130□VA
	6800	76 \times 145	0.15	17.2	TAG682M76145□VA
	6800	76 \times 150	0.15	17.5	TAG682M76150□VA
	6800	76 \times 155	0.15	17.8	TAG682M76155□VA
	6800	89 \times 130	0.15	18.1	TAG682M89130□VA
	8200	89 \times 145	0.15	19.3	TAG822M89145□VA
	8200	89 \times 157	0.15	20.0	TAG822M89157□VA
	10000	89 \times 157	0.15	22.0	TAG103M89157□VA
	12000	89 \times 195	0.15	25.0	TAG123M89195□VA
	15000	89 \times 220	0.15	28.7	TAG153M89220□VA
	15000	89 \times 235	0.15	29.5	TAG153M89235□VA
18000	89 \times 235	0.15	32.3	TAG183M89235□VA	
22000	100 \times 237	0.15	34.9	TAG223M00237□VA	
450 (500)	820	51 \times 80	0.15	4.1	TAE821M51080□VA
	1000	51 \times 80	0.15	4.5	TAE102M51080□VA
	1200	51 \times 95	0.15	5.3	TAE122M51095□VA
	1500	51 \times 115	0.15	6.5	TAE152M51115□VA
	1800	51 \times 130	0.15	7.3	TAE182M51130□VA
	2200	64 \times 95	0.15	8.2	TAE222M64095□VA
	2700	64 \times 115	0.15	9.9	TAE272M64115□VA
	3300	64 \times 130	0.15	11.5	TAE332M64130□VA
	3900	76 \times 115	0.15	13.1	TAE392M76115□VA
	4700	76 \times 130	0.15	14.8	TAE472M76130□VA
	5600	76 \times 155	0.15	17.4	TAE562M76155□VA
	6800	89 \times 157	0.15	19.6	TAE682M89157□VA
	8200	89 \times 157	0.15	21.6	TAE822M89157□VA
	10000	89 \times 195	0.15	24.5	TAE103M89195□VA
	12000	89 \times 235	0.15	27.3	TAE123M89235□VA
	15000	89 \times 235	0.15	30.5	TAE153M89235□VA
	18000	100 \times 220	0.15	33.4	TAE183M00220□VA
	22000	100 \times 260	0.15	38.7	TAE223M00260□VA
500 (550)	1000	51 \times 115	0.20	5.3	TAC102M51115□VA
	1200	51 \times 115	0.20	5.8	TAC122M51115□VA
	1500	51 \times 130	0.20	6.8	TAC152M51130□VA
	1800	64 \times 115	0.20	8.1	TAC182M64115□VA
	2200	64 \times 130	0.20	9.4	TAC222M64130□VA
	2700	76 \times 115	0.20	10.9	TAC272M76115□VA
	3300	76 \times 130	0.20	12.4	TAC332M76130□VA

W _{DC} (Surge Voltage)	Cap (μ F)	Size D \times L (mm)	tan δ 20°C/120Hz	Ripple Cur rent 85°C/120Hz (Arms)	Catalog Part Number
500 (550)	3900	76 \times 130	0.20	13.4	TAC392M76130□VA
	4700	76 \times 155	0.20	15.9	TAC472M76155□VA
	5600	89 \times 157	0.20	17.7	TAC562M89157□VA
	6800	89 \times 170	0.20	20.3	TAC682M89170□VA
	8200	76 \times 220	0.20	21.7	TAC822M76220□VA
	10000	89 \times 235	0.20	26.9	TAC103M89235□VA
	550 (600)	1000	51 \times 130	0.20	5.2
1200		51 \times 130	0.20	5.7	TAZ122M51130□VA
1500		64 \times 115	0.20	6.9	TAZ152M64115□VA
1800		76 \times 95	0.20	7.6	TAZ182M76095□VA
2200		76 \times 115	0.20	8.5	TAZ222M76115□VA
2700		76 \times 130	0.20	10.0	TAZ272M76130□VA
3300		89 \times 130	0.20	11.7	TAZ332M89130□VA
4700		89 \times 157	0.20	15.0	TAZ472M89157□VA
5600		89 \times 170	0.20	17.1	TAZ562M89170□VA
6800		89 \times 195	0.20	19.5	TAZ682M89195□VA
8200		89 \times 220	0.20	23.6	TAZ822M89220□VA
10000	89 \times 250	0.20	25.3	TAZ103M89250□VA	
600 (650)	1000	64 \times 80	0.20	6.2	TAB102M64080□VA
	1200	64 \times 95	0.20	6.7	TAB122M64095□VA
	1500	64 \times 115	0.20	8.0	TAB152M64115□VA
	1800	76 \times 95	0.20	9.6	TAB182M76095□VA
	2200	76 \times 115	0.20	11.5	TAB222M76115□VA
	2700	76 \times 130	0.20	12.1	TAB272M76130□VA
	3300	76 \times 155	0.20	15.3	TAB332M76155□VA
	3900	76 \times 195	0.20	18.4	TAB392M76195□VA
	4700	89 \times 157	0.20	19.2	TAB472M89157□VA
	5600	89 \times 195	0.20	22.0	TAB562M89195□VA
6800	89 \times 220	0.20	24.0	TAB682M89220□VA	
650 (700)	1000	64 \times 115	0.20	6.0	TAA102M64115□VA
	1200	64 \times 130	0.20	6.9	TAA122M64130□VA
	1500	76 \times 115	0.20	8.1	TAA152M76115□VA
	1800	76 \times 130	0.20	9.5	TAA182M76130□VA
	2200	76 \times 155	0.20	10.6	TAA222M76155□VA
	2700	89 \times 130	0.20	12.5	TAA272M89130□VA
	3300	89 \times 157	0.20	14.5	TAA332M89157□VA
	3900	89 \times 170	0.20	16.0	TAA392M89170□VA
	4700	89 \times 195	0.20	18.6	TAA472M89195□VA
5600	89 \times 220	0.20	21.4	TAA562M89220□VA	
700 (750)	1000	64 \times 130	0.20	5.2	TA5102M64130□VA
	1200	76 \times 115	0.20	5.9	TA5122M76115□VA
	1500	76 \times 130	0.20	6.9	TA5152M76130□VA
	1800	76 \times 155	0.20	8.2	TA5182M76155□VA
	2200	89 \times 157	0.20	9.9	TA5222M89157□VA
	2700	89 \times 170	0.20	11.5	TA5272M89170□VA
	3300	89 \times 195	0.20	13.1	TA5332M89195□VA
	3900	89 \times 220	0.20	15.0	TA5392M89220□VA
750 (800)	820	64 \times 115	0.20	4.5	TA6821M64115□VA
	1000	64 \times 130	0.20	5.3	TA6102M64130□VA
	1200	76 \times 115	0.20	6.0	TA6122M76115□VA
	1500	76 \times 145	0.20	7.1	TA6152M76145□VA
	1800	76 \times 170	0.20	8.4	TA6182M76170□VA
	2200	76 \times 195	0.20	10.2	TA6222M76195□VA
	2700	89 \times 170	0.20	11.8	TA6272M89170□VA
3300	89 \times 195	0.20	13.4	TA6332M89195□VA	

*产品编码中□内为产品端子引出型式代码
*Enter the appropriate terminal code

*记载之外的体积，请另行咨询。

*Please ask for advice for other sizes.

*铝电解电容器由于承受纹波电流而发热，随着温升而发生性能劣化。请在使用中降低产品承受的纹波电流。

*Aluminum electrolytic capacitor will emit heat when ripple current is applied, the performance will deteriorate when temp. rises. Please reduce the ripple current when using capacitor.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Zeasset](#) manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)