


AZ6991

SENSITIVE SUBMINIATURE RELAY

FEATURES

- Small footprint, extremely small width of only 5 mm
- 8 A switching capability
- High sensitivity version with 95 mW pickup power
- Dielectric strength of 4000 V_{RMS} between coil and contacts
- Isolation spacing greater than 8 mm
- Horizontal and vertical versions available
- Epoxy sealed version available
- Reinforced insulation, EN 60730-1, EN 60335-1
- UL, CUR file E43203, VDE certificate 40020561

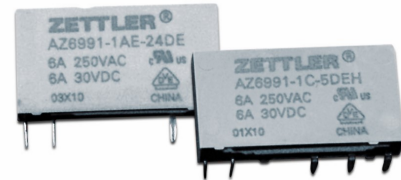

CONTACTS

Arrangement	SPST (1 Form A), SPDT (1 Form C)
Ratings (max.)	(resistive load)
switched power	180 W or 2216 VA
switched current	8 A
switched voltage	125 VDC* or 400 VAC

* Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.

Rated Loads UL, CUR

1 Form A

- 8 A at 277 VAC, resistive, 85°C, 10k cycles ^{[1][2]}
- 6 A at 277 VAC, resistive, 85°C, 60k cycles ^{[1][2]}
- 6 A at 277 VAC, general use, 85°C, 30k cycles ^[1]
- 6 A at 277 VAC, general use, 85°C, 20k cycles ^[2]
- B300, R300 pilot duty, 85°C ^{[1][2]}
- C300, R300 pilot duty, 28°C, 30k cycles ^{[1][2]}
- 6 A at 30 VDC, 85°C, 6k cycles ^{[1][2]}

1 Form C

- 8 A at 277 VAC, res., 85°C, 10k cycles (N.O.) ^{[1][2]}
- 6 A at 277 VAC, res., 85°C, 30k cycles (N.O.) ^{[1][2]}
- 6 A at 277 VAC, res., 85°C, 10k cycles (N.C.) ^{[1][2]}
- 6 A at 277 VAC, gen.use, 85°C, 30k cycles (N.O.) ^[1]
- 6 A at 277 VAC, gen.use, 85°C, 20k cycles (N.O.) ^[2]
- 6 A at 277 VAC, gen.use, 85°C, 20k cyc. (N.C.) ^{[1][2]}
- C300, R300 pilot duty, 28°C, 30k cycles (N.O.) ^{[1][2]}
- 6 A at 30 VDC, 85°C, 6k cycles ^{[1][2]}
- B300, R300 pilot duty, 85°C ^{[1][2]}

VDE

1 Form A

- 6 A at 250 VAC, 85°C, 50k cycles ^{[1][2]}
- 6 A at 30 VDC, 85°C, 60k cycles ^{[1][2]}

1 Form C

- 6 A at 250 VAC, 85°C, 10k cycles ^{[1][2]}
- 6 A at 30 VDC, 85°C, 60k cycles ^{[1][2]}

Contact materials	AgNi (silver-nickel) ^[1] AgSnO ₂ (silver-tin-oxide) ^[2] gold plating available
--------------------------	---

Initial resistance	< 100 mΩ
---------------------------	----------

COIL

Nominal coil DC voltages	see coil voltage specifications table
Dropout	> 5% of nominal coil voltage
Nominal power	(typ.)
5 to 24 VDC coils	170 mW
48 to 60 VDC coils	210 mW
Power at pickup voltage	(typ.)
5 to 24 VDC coils	95 mW
48 to 60 VDC coils	120 mW
Temperature Rise	20 K (typ., at nominal coil voltage)
Max. temperature	105°C (221°F) - Class A

GENERAL DATA

Life Expectancy	(minimum operations)
mechanical	1 x 10 ⁷
electrical	1 x 10 ⁵ at 5 A, 250 VAC
Operate Time	8 ms (max.) at nominal coil voltage
Release Time	4 ms (max.) at nominal coil voltage, without coil suppression
Dielectric Strength	(at sea level for 1 min.) 4000 V _{RMS} coil to contact 1000 V _{RMS} between open contacts
Surge voltage	coil to contact
	6000 V (at 1.2 x 50 μs)
Insulation Resistance	1000 MΩ (min.) at 20°C, 500 VDC, 50% RH
Temperature Range	(at nominal coil voltage)
operating	-40°C (-40°F) to 85°C (185°F)
Vibration resistance	1 mm DA at 10–55 Hz
Shock	5 g (operating)
Enclosure	P.B.T. polyester
type	flux proof, wash tight
material group	IIIa
flammability	UL94 V-0
Terminals	Tinned copper alloy, P. C.
Soldering	
max. temperature	260°C (500°F)
max. time	5 seconds
Cleaning	
max. solvent temp.	80°C (176°F)
max. immersion time	30 seconds
Outline Dimensions	28.0 mm X 5.0mm X 15.0 mm
Weight	5 grams (approx.)
Packing unit in pcs	
horizontal version	20 per plastic tube / 1000 per carton box
vertical version	100 per plastic tube / 2000 per carton box
Compliance	UL 508, IEC 61810-1, RoHS, REACH

ZETTLER electronics GmbH

- A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0
fax: +49 89 800 97-200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

page 1 of 2 2019-03-06

AZ6991


COIL SPECIFICATIONS

Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm
5	3.75	7.5	147 (±10%)
6	4.5	9.0	212 (±10%)
9	6.75	13.5	476 (±10%)
12	9.0	18	848 (±10%)
18	13.5	27	1906 (±15%)
24	18.0	36	3390 (±15%)
48	36.0	72	10600 (±15%)
60	45.0	90	16600 (±15%)


MECHANICAL DATA

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

Vertical Mount

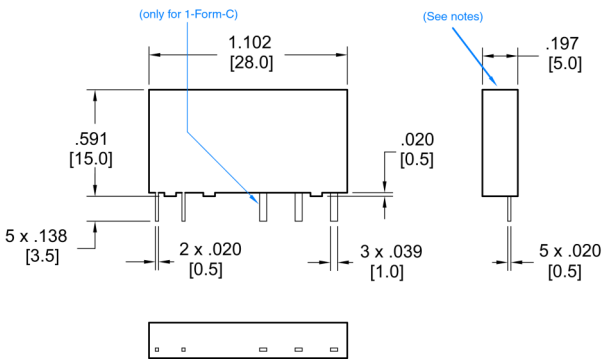

Horizontal Mount

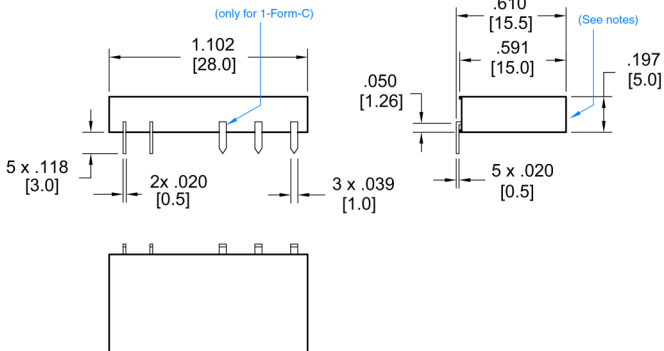


WIRING DIAGRAMS

Viewed towards terminals


Vertical Mount



Horizontal Mount

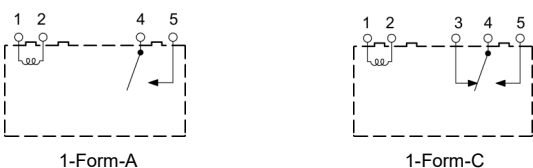


ORDERING DATA

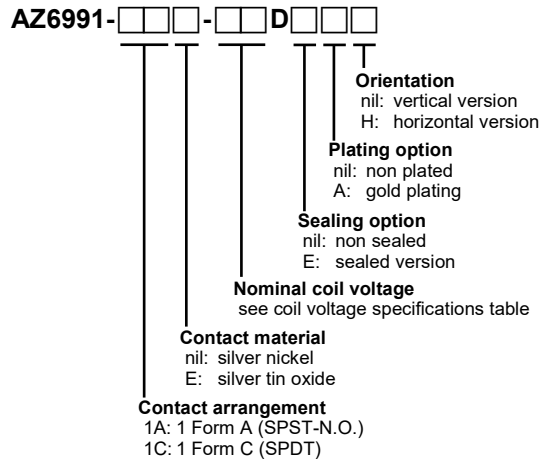


PC BOARD LAYOUT

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"
Viewed towards terminals

Vertical Mount

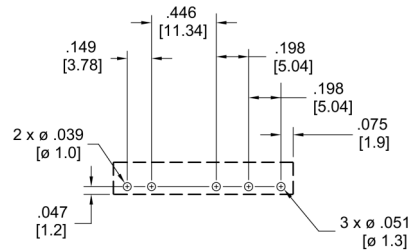

Horizontal Mount



Note: Mounting hole diameters and center to center dimensions are the same for vertical and horizontal mounting version.

NOTES

- Specifications subject to change without notice.
- All values at 20°C (68°F) unless otherwise stated.
- Relay may pull in with less than "Must Operate" value.
- Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time.
- Do not mount SPDT (1 Form C) types so that the marked side is facing downwards. See mechanical drawings for details.

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf

The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER electronics GmbH

- A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0
fax: +49 89 800 97-200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

page 2 of 2 2019-03-06

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2-US-AC120](#) [LY2-US-DC24](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#)
[M115C60](#) [M115N010](#) [M115N0150](#) [603-12D](#) [60HE1-5DC](#) [60HE2S-12DC](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#)
[61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#)
[61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)