

# AZ979

## 80 AMP AUTOMOTIVE RELAY

### FEATURES

- 80 Amp contact rating
- High momentary carry current
- High operating temperature (85°C)
- SPST N.O. (1 Form A), SPDT (1 Form C), SPST N.C. (1 Form B)
- Quick connect terminals
- Epoxy sealed version available

### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPST (1 Form B) SPDT (1 Form C)
<b>Ratings</b>	Resistive load:  <b>1 Form A</b> Max. switched power: 1120 W Max. switched current: 80 A Max. switched voltage: 28 VDC  <b>1 Form B</b> Max. switched power: 840 W Max. switched current: 60 A Max. switched voltage: 28 VDC  <b>1 Form C</b> Max. switched power: 840 W Max. switched current: 60 A Max. switched voltage: 28 VDC
<b>Rated Load</b>	Resistive load:  <b>1 Form A</b> 80 A at 14 VDC Resistive, 20°C 40 A at 28 VDC Resistive, 20°C 40 A at 14 VDC Resistive, 85°C 20 A at 28 VDC Resistive, 85°C  120 A at 28 VDC Resistive, 85°C (inrush for 3 seconds with make/break ratio 1:10)  <b>1 Form B</b> 60 A at 14 VDC Resistive, 20°C 30 A at 28 VDC Resistive, 20°C 30 A at 14 VDC Resistive, 85°C 15 A at 28 VDC Resistive, 85°C  <b>1 Form C</b> 60 A at 14 VDC Resistive, 20°C, (N.O.) 40 A at 28 VDC Resistive, 20°C, (N.O.) 40 A at 14 VDC Resistive, 85°C, (N.O.) 20 A at 28 VDC Resistive, 85°C, (N.O.)  60 A at 14 VDC Resistive, 20°C, (N.C.) 30 A at 28 VDC Resistive, 20°C, (N.C.) 30 A at 14 VDC Resistive, 85°C, (N.C.) 15 A at 28 VDC Resistive, 85°C, (N.C.)
<b>Material</b>	Silver tin oxide
<b>Resistance</b>	< 50 milliohms initially (at 24 V, 1 A, voltage drop method)



### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 80 A 14 VDC Res.
<b>Operate Time (typical)</b>	7 ms at nominal coil voltage
<b>Release Time (typical)</b>	5 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength</b> <b>(at sea level for 1 min.)</b>	500 Vrms coil to contact 500 Vrms between open contacts
<b>Insulation Resistance</b>	100 megohms min. at 500 VDC, 20°C 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b> <b>Storage</b>	-40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	0.062" (1.5 mm) DA at 10-55 Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	PA 66
<b>Terminals</b>	Copper alloy Quick Connect Note: Allow suitable slack on leads when wiring and do not subject the terminals to excessive force.
<b>Weight</b>	48 grams

### COIL

<b>Power</b>	
<b>At Pickup Voltage</b> <b>(typical)</b>	0.76 W
<b>Max. Continuous</b> <b>Dissipation</b>	3.0 W at 20°C (68°F)
<b>Temperature Rise</b>	56°C (101°F) at nominal coil voltage
<b>Temperature</b>	Max.155°C (311°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com  
fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes  
which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2011-07-28


# AZ979

## RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	SPST	SPDT
6	3.9	7.8	20	AZ979-1A-6D	AZ979-1C-6D
12	7.8	15.6	90	AZ979-1A-12D	AZ979-1C-12D
24	15.6	31.2	360	AZ979-1A-24D	AZ979-1C-24D

\* For SPST (N.C.) (1 Form B) relay, substitute "1B" for "1A".  
 Add suffix "R" for resistor in parallel with coil. Resistor values: 6V: 180  $\Omega$ , 12V: 680  $\Omega$ , 24V: 2700  $\Omega$ .  
 Add suffix "D" for diode across coil option (+ pole of power supply at terminal #86).  
 Add suffix "E" for epoxy sealed version.

## MECHANICAL DATA

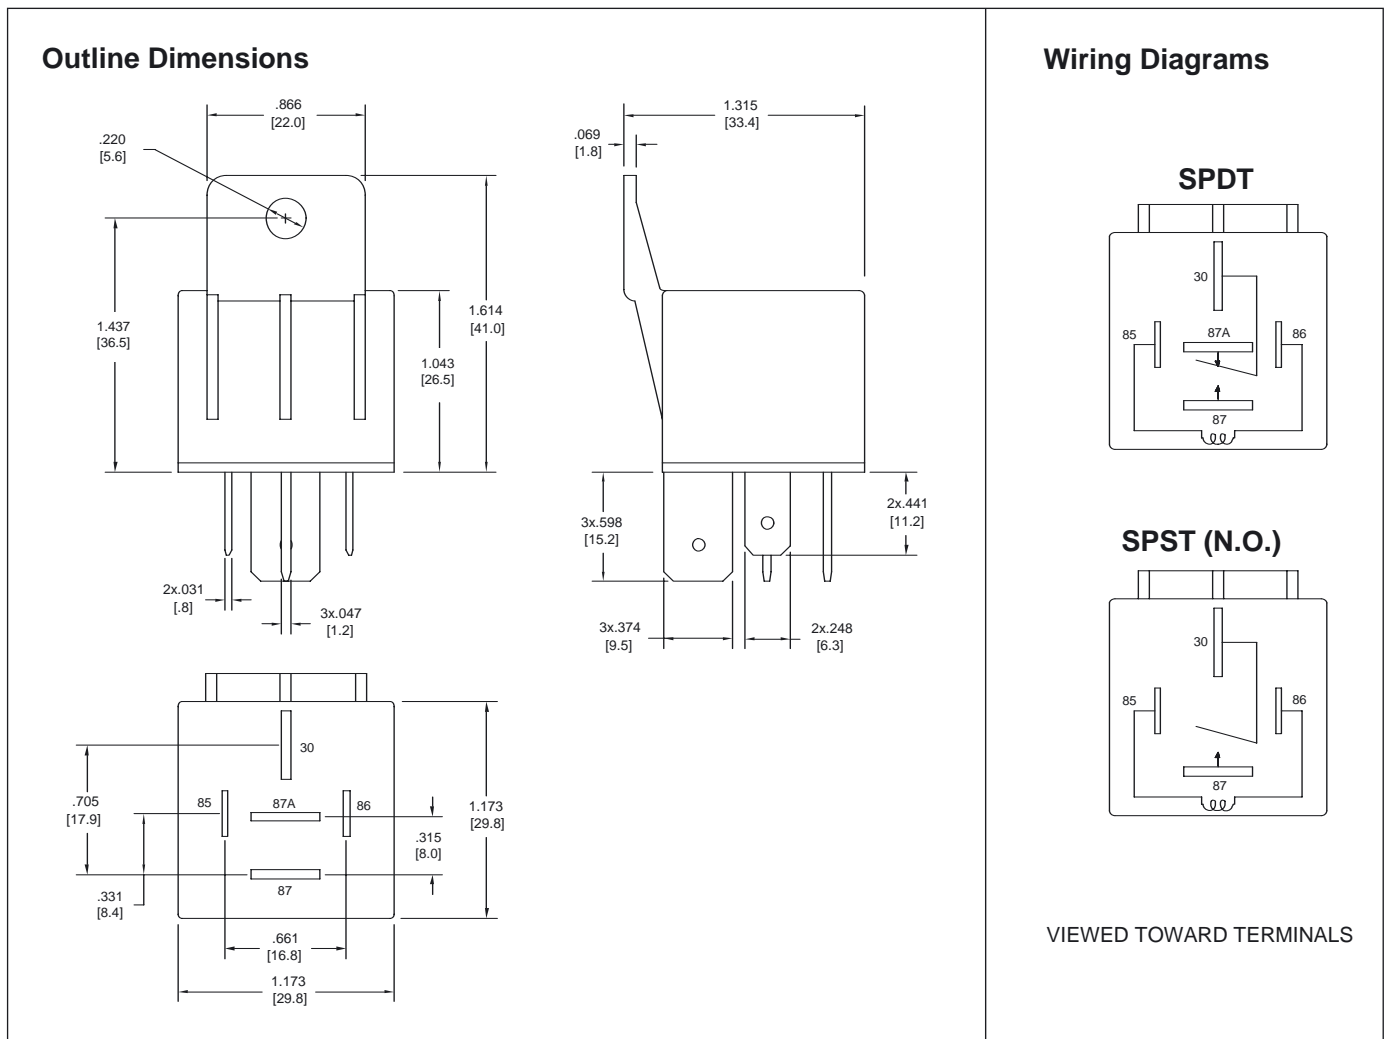

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0

office@ZETTLERelectronics.com

fax: +49 89 800 97-200

www.ZETTLERelectronics.com

This product specification to be used only together with the application notes

which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2011-07-28

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Relays](#) category:*

*Click to view products by [Zettler](#) manufacturer:*

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#) [1617057-2](#)  
[1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#) [AR4-15F11](#) [AR4-41F11](#) [41FZ-200ACG-](#)  
[BSL](#) [5-1616920-2](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [1-1617059-9](#) [V23134A1052X299](#) [6-1393298-2](#) [6-1393302-1](#) [CP112J](#)  
[897H-1AH-D-R1-U01-12VDC](#) [871-1A-S-12VDC](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [V23134M0052G242](#) [1393204-](#)  
[1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [V23134B0052C642](#) [V23234-A1001-X036](#) [V23234C0001X006](#) [V23134A 53C643](#)  
[V23134J0065X497](#) [V23134J2053X194](#) [VF4A-45H11](#) [VF7-11F11-S01](#) [LD-12P](#) [FBR56ND12-W1](#) [FBR572ND24-W](#) [LQ-12S](#) [S11-1A-C1-](#)  
[12VDC](#)