

SEALED TRANSFORMER, PCB 0.5VA EE20-10.5 SERIES


PAGE REV	DESCRIPTION	DATE	BY
A0	CREATED	2010-03-30	Jacise
A1	Modified	2015-10-30	ye

1. ELECTRICAL SPECIFICATIONS:






- A. Input Voltage and Frequency: 115/230V @ 50/60 Hz
- B. Secondary Voltage: See Electrical Table
- C. Ambient Temperature: 50° C MAX allowed.
- D. Insulation Resistance:
100M Ohm Min @ 500VDC PRI. to SEC.
- E. Hi-Pot:
4200Vrms 1 minute @ PRI. to SEC., when the primary input voltage is 230V
2800Vrms 1 minute @ PRI. to SEC., when the primary input voltage is 115V

F. APPROVALS:

- UL 5085 class 2 and class 3 recognized.
- Conforms to EN 60950 .

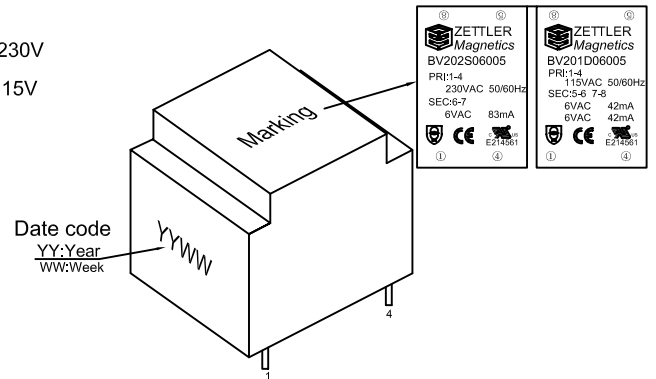

2. MECHANICAL SPECIFICATIONS:

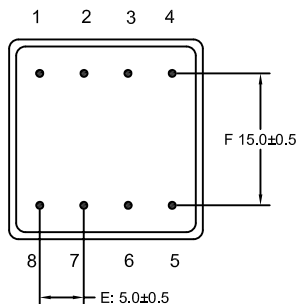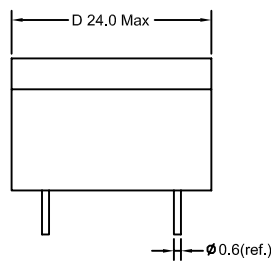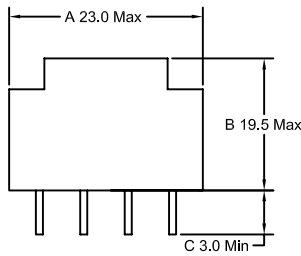

UNIT MM	TOLERANCE	
	X.X = ±0.5	
	X.XX = ±0.3	
	ANG = -	
3RD ANGLE 		
SCALE:		DATA
DRAWN:	ye	2015-10-30
CHECKED:		
APPROVED:		

ZETTLER MAGNETICS

TITLE: SEALED TRANSFORMER, PCB 0.5VA




PART NO: BV20XXXX005	ZM Project:	SPEC REV: A/1
	Customers p/n:	SH NO 1/3

Web: www.zettlermagnetics.com
E-mail: sales@zettlermagnetics.com

PAGE REV	DESCRIPTION	DATE	BY
A0	CREATED	2010-03-30	Jacise
A1	Modified	2015-10-30	ye

- LAMINATION
- COIL
- X

 BOBBIN

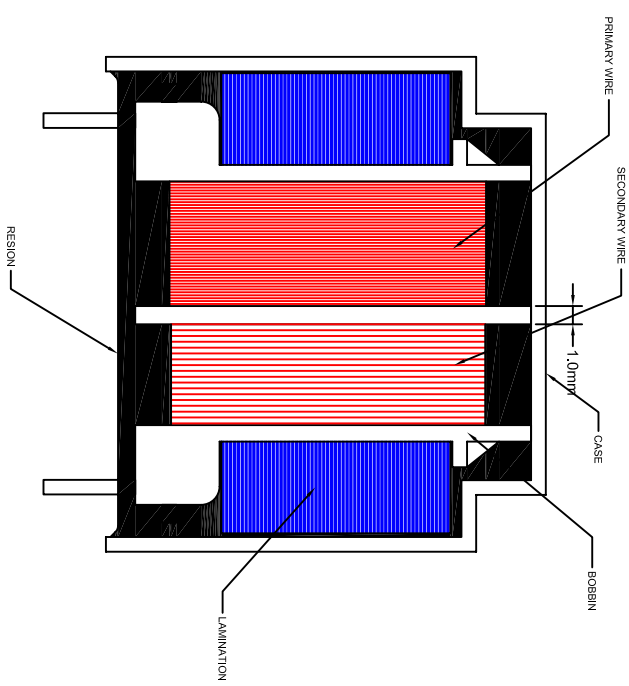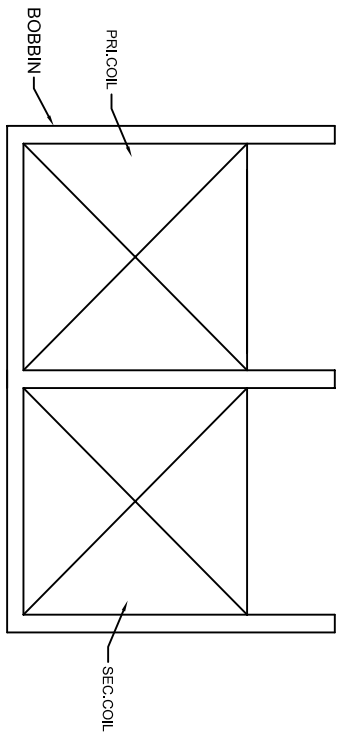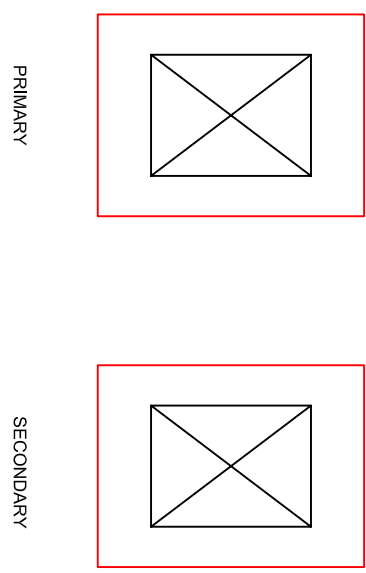

UNIT	TOLERANCE
MM	X.X = ±0.5
3RD ANGLE	X.XX = ±0.3
	ANG = -
SCALE:	DATA
DRAWN: ye	2015-10-26
CHECKED:	
APPROVED:	

ZETTLER MAGNETICS

TITLE: SEALED TRANSFORMER, PCB 0.5VA

PART NO: **BV20XXXXX005**

ZM Project:	SPEC REV: A1
Customer's p/n:	SH NO: 3/3

Web: www.zettlermagnetics.com E-mail: sdles@zettlermagnetics.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Transformers](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[MP3500](#) [BV UI 302 0156](#) [45029](#) [BV EI 302 2863](#) [BV EI 303 2809](#) [BV EI 303 3060](#) [BV EI 305 2309](#) [BV EI 306 3604](#) [BV EI 481 1295](#) [BV EI 481 1325](#) [BV UI 301 0133](#) [BV UI 302 0144](#) [BV UI 302 0161](#) [BV UI 304 0019](#) [BV UI 304 0129](#) [BV UI 304 0159](#) [BV UI 304 0173](#) [TI-EF16-2X4V-4W](#) [SPCT62/40150/5AVA3CL1](#) [SPCT62/30100/5AVA1CL1](#) [SPCT62/3075/5AVA1CL3](#) [SPCT62/40150/5AVA1.5CL1](#) [SPCT62/40200/5AVA2.5CL0.5](#) [SPCT62/40300/5AVA3CL0.5](#) [CTD-KIT](#) [44013](#) [44017](#) [44021](#) [44098](#) [44101](#) [44134](#) [44171](#) [44174](#) [44178](#) [44180](#) [44248](#) [44250](#) [44278](#) [44339](#) [44340](#) [44373](#) [44375](#) [44376](#) [44378](#) [44379](#) [44436](#) [44831](#) [B82801B0925A200](#) [PA3655NL](#) [PA3828NL](#)