








SEALED TRANSFORMER, PCB 2.3VA EI 30-18 SERIES

1. ELECTRICAL SPECIFICATIONS:

- A. Input Voltage and Frequency: 115/230V @ 50/60 Hz
- B. Secondary Voltage: See Electrical Table
- C. Ambient Temperature: 70° C MAX allowed.
- D. Insulation Resistance:
 - 100M Ohm Min @ 500VDC PRI. to SEC.
- E. Hi-Pot:
 - 4200Vrms 1mA 1second @ PRI. to SEC.
- F. Approvals:
 - UL506,UL1585 class 2 and class 3,VDE,EN61558,EN60950
- G. When the primary is 115V input,the transformer are non CQC approval.

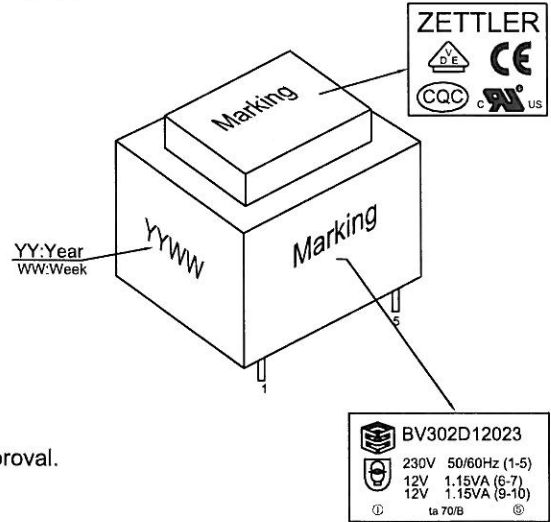

2. MECHANICAL SPECIFICATIONS:

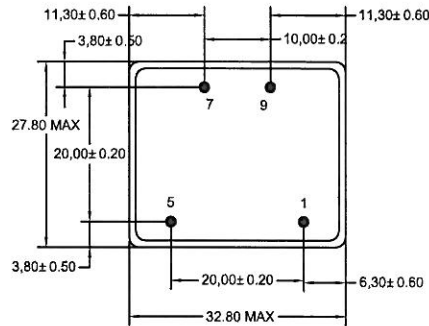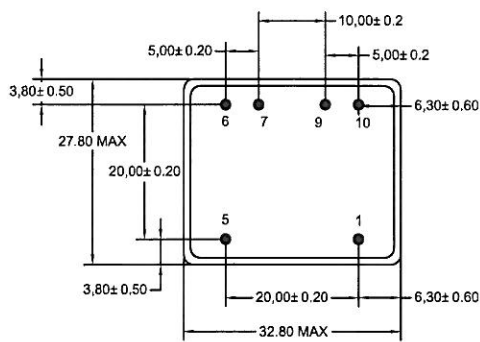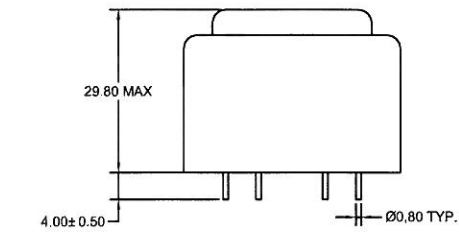


Dual outputs

Single output

A2	Added dimension measurements	Winston	2008-7-17
A1	Changed the hi-pot from 2800V to 4200V,for 115V primary	Winston	2008-3-18
REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)

TOLERANCE	SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	MODEL DESCRIPTION	
X	± 0.3	DRAWN	Janise	ZETTLER MAGNETICS	MATERIAL 120° C or higher
X.X	± 0.2	CHECKED			MODEL: EI 30-18 2.3VA
X.XX	± 0.1	APPROVED		TITLE EI 30-18 2.3VA	SHEET: 1 OF 2
THICKNESS	/				
REV.	A0				

3. SCHEMATIC DIAGRAM:

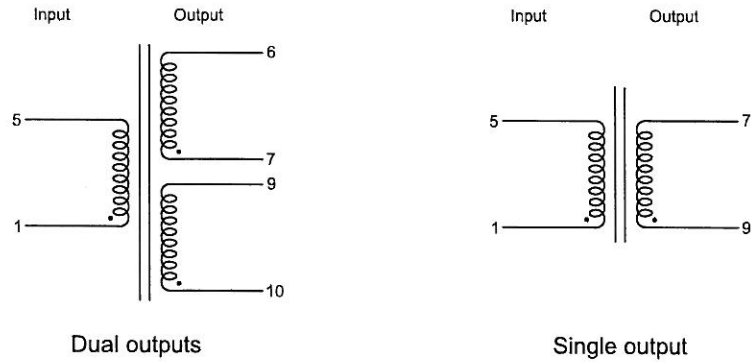


4. ELECTRICAL TABLE:

Part Number (Input: 115V)	Part Number (Input: 230V)	Secondary Voltage (V)		Secondary current (mA)	No-load Voltage (V)(max)	Ambient temperature (°C)	Rated Power (VA)
BV301S06023	BV302S06023	6±10%		383	10.5	T 70 B	2.3
BV301S09023	BV302S09023	9±10%		256	15.7	T 70 B	2.3
BV301S12023	BV302S12023	12±10%		192	21	T 70 B	2.3
BV301S15023	BV302S15023	15±10%		153	25.9	T 70 B	2.3
BV301S18023	BV302S18023	18±10%		128	31.4	T 70 B	2.3
BV301S24023	BV302S24023	24±10%		96	41.9	T 70 B	2.3
BV301D06023	BV302D06023	6±10%	6±15%	2×192	2×10.5	T 70 B	2.3
BV301D09023	BV302D09023	9±10%	9±15%	2×128	2×15.7	T 70 B	2.3
BV301D12023	BV302D12023	12±10%	12±15%	2×96	2×21	T 70 B	2.3
BV301D15023	BV302D15023	15±10%	15±15%	2×77	2×25.0	T 70 B	2.3
BV301D18023*	BV302D18023*	18±10%	18±15%	2×64	2×31.4	T 70 B	2.3
BV301D24023*	BV302D24023*	24±10%	24±15%	2×48	2×41.9	T 70 B	2.3

* To be noted:*marked transformers are non VDE approved.
Those transformers meet all requirement of EN61558-2-4.

TOLERANCE		SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)
X	± 0.3	DRAWN	Janise	2008-1-16				
X.X	± 0.2	CHECKED						
X.XX	± 0.1	APPROVED						
THICKNESS	/							
REV.	A0							

MODEL DESCRIPTION		MATERIAL 120° C or higher
 ZETTLER MAGNETICS TITLE EI 30-18 2.3VA		MODEL: EI 30-18 2.3VA
		SHEET: 2 OF 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)