








SEALED TRANSFORMER, PCB 2.8VA EI 30-18 SERIES

1. ELECTRICAL SPECIFICATIONS:

- A. Input Voltage and Frequency: 115/230V @ 50/60 Hz
- B. Secondary Voltage: See Electrical Table
- C. Ambient Temperature: 40° C MAX allowed.
- D. Insulation Resistance:
100M Ohm Min @ 500VDC PRI. to SEC.
- E. Hi-Pot:
4200Vrms 1mA 1second @ PRI. to SEC.
- F. Approvals:
UL506,VDE,EN61558,EN60950
- G. When the primary is 115V input,the transformer are non CQC approval.

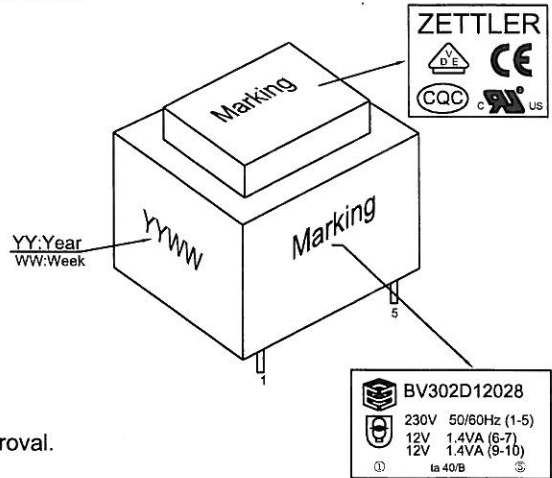

2. MECHANICAL SPECIFICATIONS:

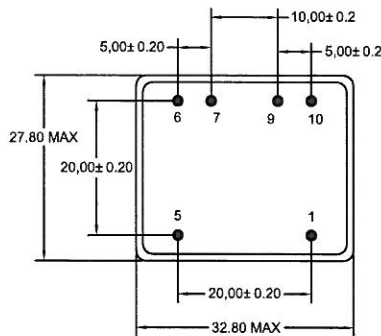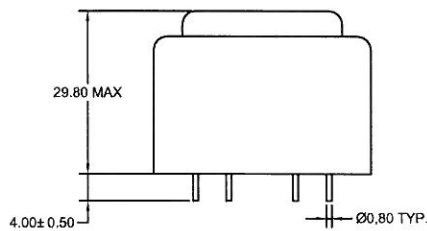


Dual outputs

Single output

A1	Changed the hi-pot from 2800V to 4200V,for 115V primary	Winston	2008-3-18
REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)

TOLERANCE	SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	MODEL DESCRIPTION	
X	± 0.3	DRAWN	Janise	ZETTLER MAGNETICS	MATERIAL 120° C or higher
X.X	± 0.2	CHECKED			MODEL: EI 30-18 2.8VA
X.XX	± 0.1	APPROVED		TITLE EI 30-18 2.8VA	SHEET: 1 OF 2
THICKNESS	/				
REV.	A0				


3. SCHEMATIC DIAGRAM:

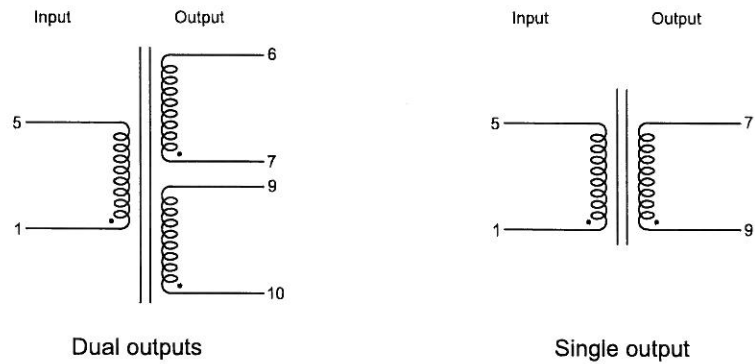

4. ELECTRICAL TABLE:

Part Number (Input: 115V)	Part Number (Input: 230V)	Secondary Voltage (V)		Secondary current (mA)	No-load Voltage (V)(max)	Ambient temperature (°C)	Rated Power (VA)
BV301S06028	BV302S06028	6±10%		467	10.5	T 40 B	2.8
BV301S09028	BV302S09028	9±10%		311	15.4	T 40 B	2.8
BV301S12028	BV302S12028	12±10%		233	21.1	T 40 B	2.8
BV301S15028	BV302S15028	15±10%		187	26.3	T 40 B	2.8
BV301S18028	BV302S18028	18±10%		156	30.9	T 40 B	2.8
BV301S24028	BV302S24028	24±10%		117	42.1	T 40 B	2.8
BV301D06028	BV302D06028	6±10%	6±15%	2×233	2X10.5	T 40 B	2.8
BV301D09028	BV302D09028	9±10%	9±15%	2×156	2X15.4	T 40 B	2.8
BV301D12028	BV302D12028	12±10%	12±15%	2×117	2X21.1	T 40 B	2.8
BV301D15028	BV302D15028	15±10%	15±15%	2×93	2X25.0	T 40 B	2.8
BV301D18028*	BV302D18028*	18±10%	18±15%	2×70	2X31.5	T 40 B	2.8
BV301D24028*	BV302D24028*	24±10%	24±15%	2×58	2X42.1	T 40 B	2.8

* To be noted:*marked transformers are non VDE approved.
Those transformers meet all requirement of EN61558-2-4.

TOLERANCE		SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	MODEL DESCRIPTION	REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)
X	± 0.3	DRAWN	Janise	2008-2-18	 ZETTLER MAGNETICS TITLE EI 30-18 2.8VA				
X.X	± 0.2	CHECKED							
X.XX	± 0.1	APPROVED							
THICKNESS	/								
REV.	A0								
								MATERIAL 120° C or higher	
								MODEL: EI 30-18 2.8VA	
								SHEET: 2 OF 2	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)