


RoHS

ORDERING CODE (命名规则)

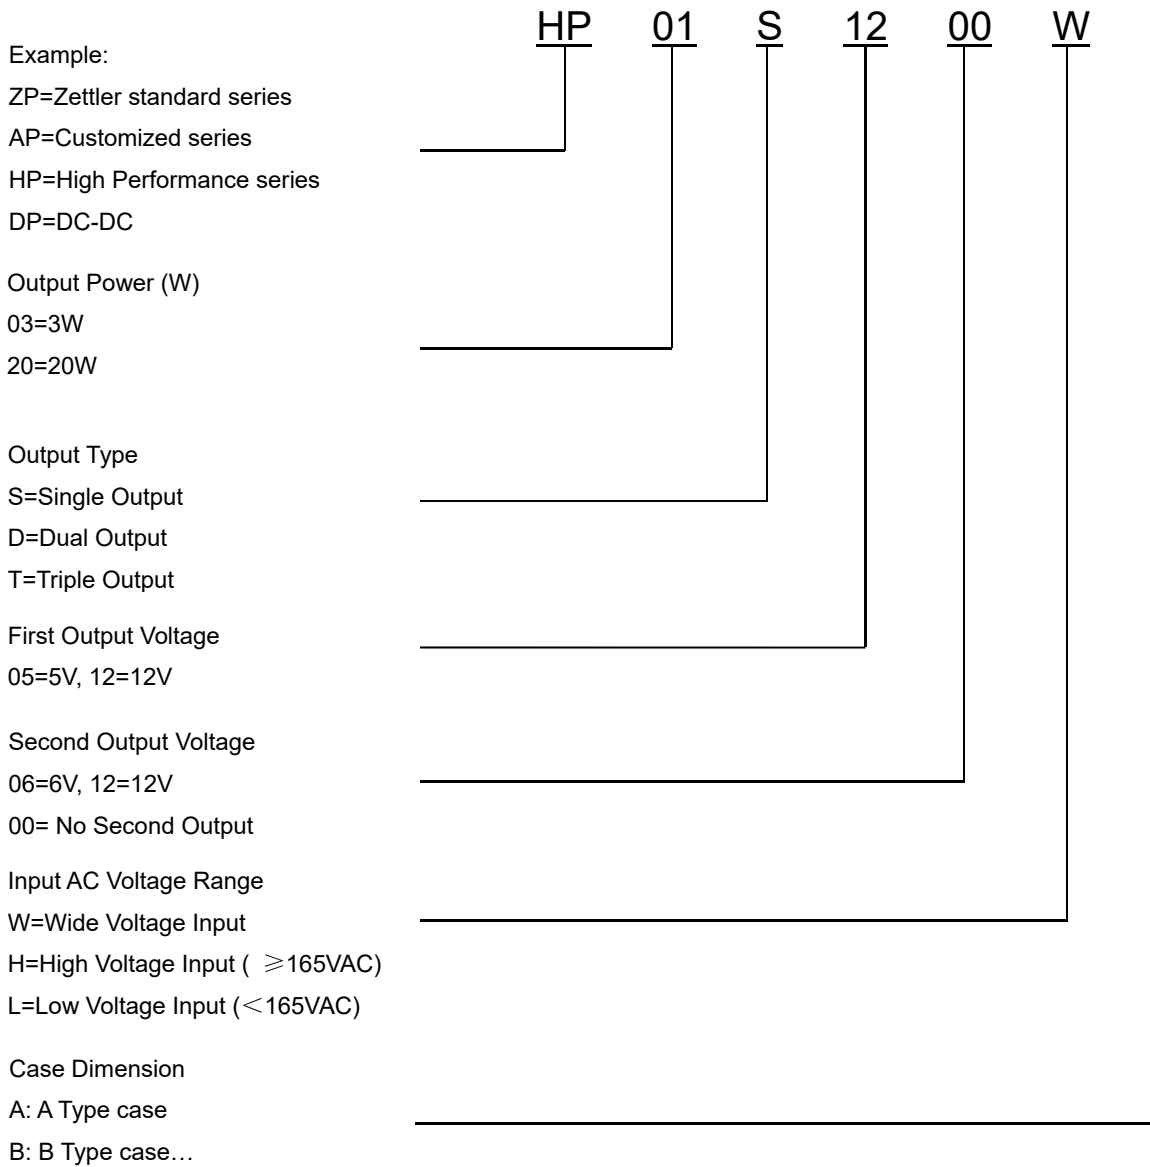

FEATURES (产品特点)

- PCB mounted switching Power module
- AC input voltage range: 85VAC~305VAC
- DC input voltage range: 100VDC~430VDC
- Ambient temperature range: -25°C~85°C
- Storage temperature range: -40°C~105°C
- Leakage current (Input :305VAC): <0.25mA
- Isolation voltage: Input –Output ≥3600VAC 60S
- Insulation Resistance: Input –Output 500VDC ≥100M Ohms
- MTBF:1000Khrs Min MIL-HDBK-217F (25°C)
- Compact size, easy installation
- High efficiency low standby power consumption <0.15W, Environment-friendly
- Built-in output over current protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55032 class B standard
- Class II Construction

APPLICATIONS (应用)

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.

NOTE: Contact Zettler for information on halogen free options



MODEL LIST (型号列表)

Model No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple&Noise (max)	Ambient TEMP(°C)	Weight	Certificate			
								UL	TUV	CE	CB
HP01S0300WI	1W	3.3Vdc	300mA	66%	150mVp-p	85	20g	●	●	●	●
HP01S0500WI	1W	5 Vdc	200mA	70%	150mVp-p	85	20g	●	●	●	●
HP01S0600WI	1W	6 Vdc	166mA	70%	150mVp-p	85	20g	●	●	●	●
HP01S0700WI	1W	7.5Vdc	133mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S0800WI	1W	8Vdc	125mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S0900WI	1W	9Vdc	111mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S1000WI	1W	10Vdc	100mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S1200WI	1W	12Vdc	83mA	74%	150mVp-p	85	20g	●	●	●	●
HP01S1500WI	1W	15Vdc	66mA	75%	200mVp-p	85	20g	●	●	●	●
HP01S1800WI	1W	18Vdc	55mA	77%	200mVp-p	85	20g	●	●	●	●
HP01S2400WI	1W	24Vdc	42mA	77%	200mVp-p	85	20g	●	●	●	●


ELECTRICAL SPECIFICATION (电性能参数)

Model No. / 型号		HP01SXX00WI		
Input 输入参数	Rated Voltage / 额定电压	100-277VAC		
	Voltage Range / 输入电压范围	85-305VAC or 100-430VDC		
	Frequency (Hz) / 输入频率范围	47-63 Hz		
	Current (Full load) / 输入电流	115VAC	230VAC	277VAC
		25mA	18mA	15mA
	Inrush Current (<500us) / 冲击电流	6A	10A	
	No Load Loss / 待机功耗	0.15W Max@230VAC		
HOT PLUG / 热拔插	Unavailable			
Output 输出参数	Voltage (V) / 输出电压	Refer to "Model List"		
	Current (mA) max. / 输出额定电流	Refer to "Model List"		
	Voltage Accuracy / 输出电压精度	±3%		
	Line Regulation / 线性调节率	±0.5%		
	Load Regulation / 负载调节率	±0.5%		
	Minimum Load (mA) / 最小负载	0		
	Ripple & Noise / 输出纹波	Refer to "Model List"		
	Efficiency (typ.) / 工作效率	Refer to "Model List"		
	Set-up Time / 开机时间	≤50ms/230VAC, ≤30ms/115VAC		
	Hold up Time / 掉电保持时间(典型值)	>40ms/230VAC, 12ms/115VAC		
Protection 保护特性	Over Current Protection / 过流保护	≥120%Io Self-recovery		
	Short Circuit Protection / 短路保护	Hiccup ,continuous ,short capable, self-recovery		
Environment 环境	Operating Temperature / 工作温度	-25°C...+85°C @Free air convection		
	Operating Humidity / 工作湿度	10-90% RH		
	Storage Temperature / 存储温度	-40°C...+105°C		
	Storage Humidity / 存储湿度	5~95% RH (No Condensing) at full load		
	Temperature Coefficient/温度漂移系数	±0.03%/°C (0~85°C)		
Physical 外观结构	Case Material / 外壳材质	Plastic (UL 94V-0 rated)		
	Weight / 产品净重	20g (ref.)		
Safety & EMC 安全认证及 电磁兼容	Dielectric Strength / 绝缘强度	I/P-O/P : 3600VAC		
	Safety Standards / 安全标准	Compliance With UL/EN62368-1 ,EN61558-2-16		
	EMI / 电磁兼容	Compliance With EN55032 CLASS B, EN61000-3-2, EN61000-3-3		
	EMS (Noise Immunity)/ 电磁抗干扰	Compliance With EN55035	Need to add external EMC component (Refer to the Schematic)	
Reliability Requirement 可靠性要求	MTBF/平均故障间隔时间	1000Khrs Min MIL-HDBK-217F (25°C)		
	Burn-In Test/ 老化测试	The unit shall be burned in for 2~4 Hours under 277Vac input and with full load at 25°C		

PRODUCT CHARACTERISTIC CURVE (产品特性曲线)

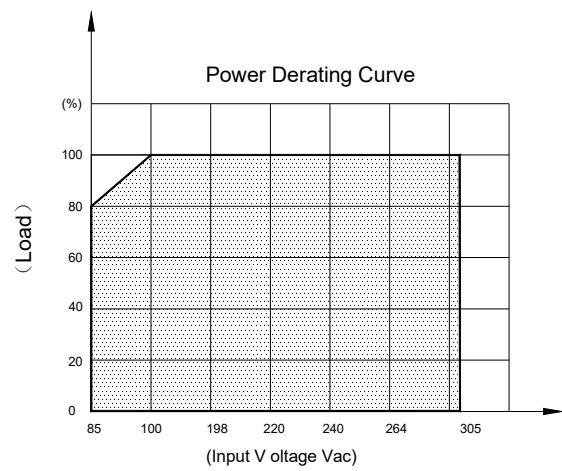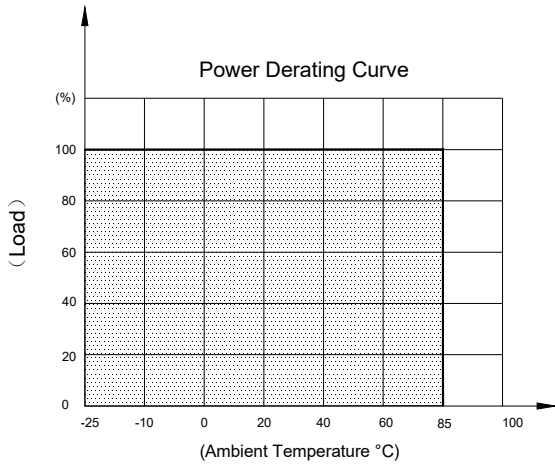


TYPICAL APPLICATION SCHEMATIC (典型应用电路)

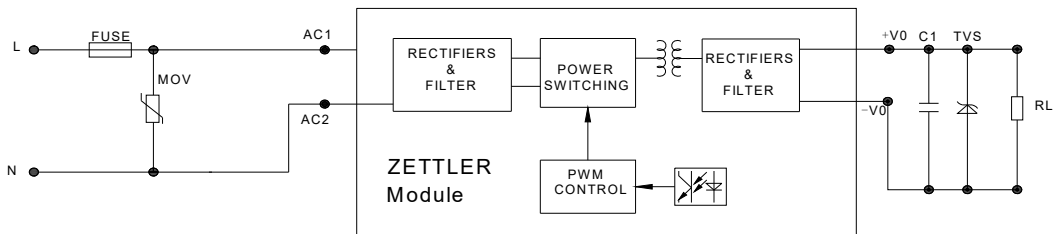

ITEM	MOV	FUSE
1~2W	14D561K	1A/300V
3-10W	14D561K	2A/300V
10~20W	14D561K	3.15A/300V

Note: External circuit components are only recommendations, customers should choose their own components and values according to their specific system application requirements.

MECHANICAL SPECIFICATION (尺寸图)

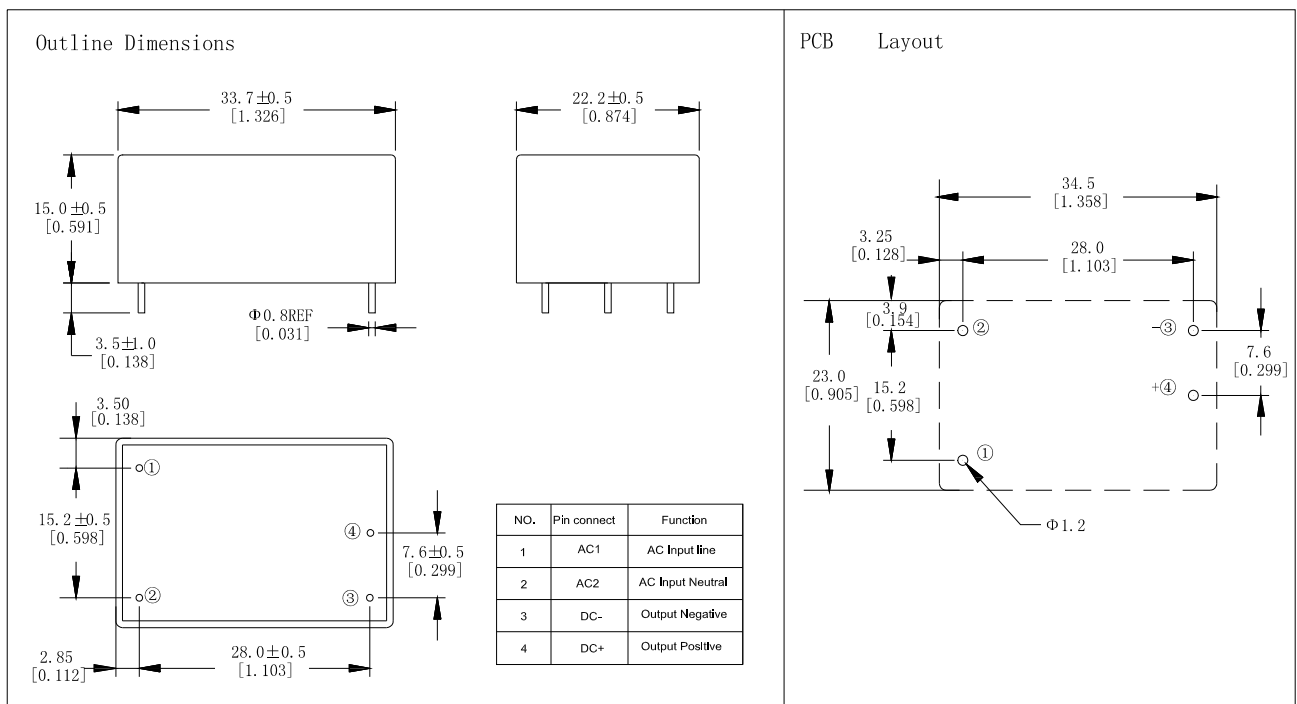

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC/DC Power Modules](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[ERP-350-12](#) [RAC05-05SK/PD3/H](#) [AMEOF65-12SJZ](#) [AMEOFL10-24S480PEVZ-B](#) [AMEOFL10-3S480PEVZ-B](#) [AMEL10-12S277HAVZ-B](#)
[AMEOFL5-3S480HANZ-B](#) [AMEOFL5-5S480HANZ-B](#) [AMEOFL5-12S480HANZ-B](#) [RAC05-12SK/PD3/H](#) [AME30-9S480JZ-B](#) [AMEL20-3S277HAVZ-B](#) [AMEL45-24SJZ](#) [AMEL30-12S277HAVZ](#) [AMEL30-15S277HAVZ](#) [AMEL30-3S277HAVZ](#) [AMEL30-5S277HAVZ](#)
[AMEL30-9S277HAVZ](#) [AMEM5-9S277HAVZ-B](#) [AMESP100-24S277NZ](#) [AMESP100-48S277NZ](#) [AMESP150-24S277NZ](#) [AMESP200-24S277NZ](#) [AMESP320-24S277NZ](#) [AMESP320-48S277NZ](#) [AMESP75-12S277NZ](#) [AMESP75-24S277NZ](#) [AMESP75-48S277NZ](#) [AME30-3S480JZ-B](#) [ZP05S1200WB](#) [AME30-5S480JZ-B](#) [AME10-24S277PEVZ](#) [AMEL60-24SJZ](#) [AMEL60-48SJZ](#) [AMEM3-15S277HAVZ-B](#)
[AMEM3-24S277HAVZ-B](#) [AMEM3-3S277HAVZ-B](#) [AMEM3-9S277HAVZ-B](#) [AMEM5-12S277HAVZ-B](#) [AMEM5-15S277HAVZ-B](#)
[AMEM5-5S277HAVZ-B](#) [AMEOF225-12SHAMJZ](#) [AMEL15-24S277HAVZ-B](#) [AMEL15-5S277HAVZ](#) [AMEL15-5S277HAVZ-ST](#) [AMEL20-12S277HAVZ-B](#) [AMEL20-24S277HAVZ-STD](#) [AMEOF450-24SHAMJZ](#) [AMEOF450-48SHAMJZ](#) [AMEL10-5S277HAVZ-B](#)