


RoHS

ORDERING CODE (命名规则)

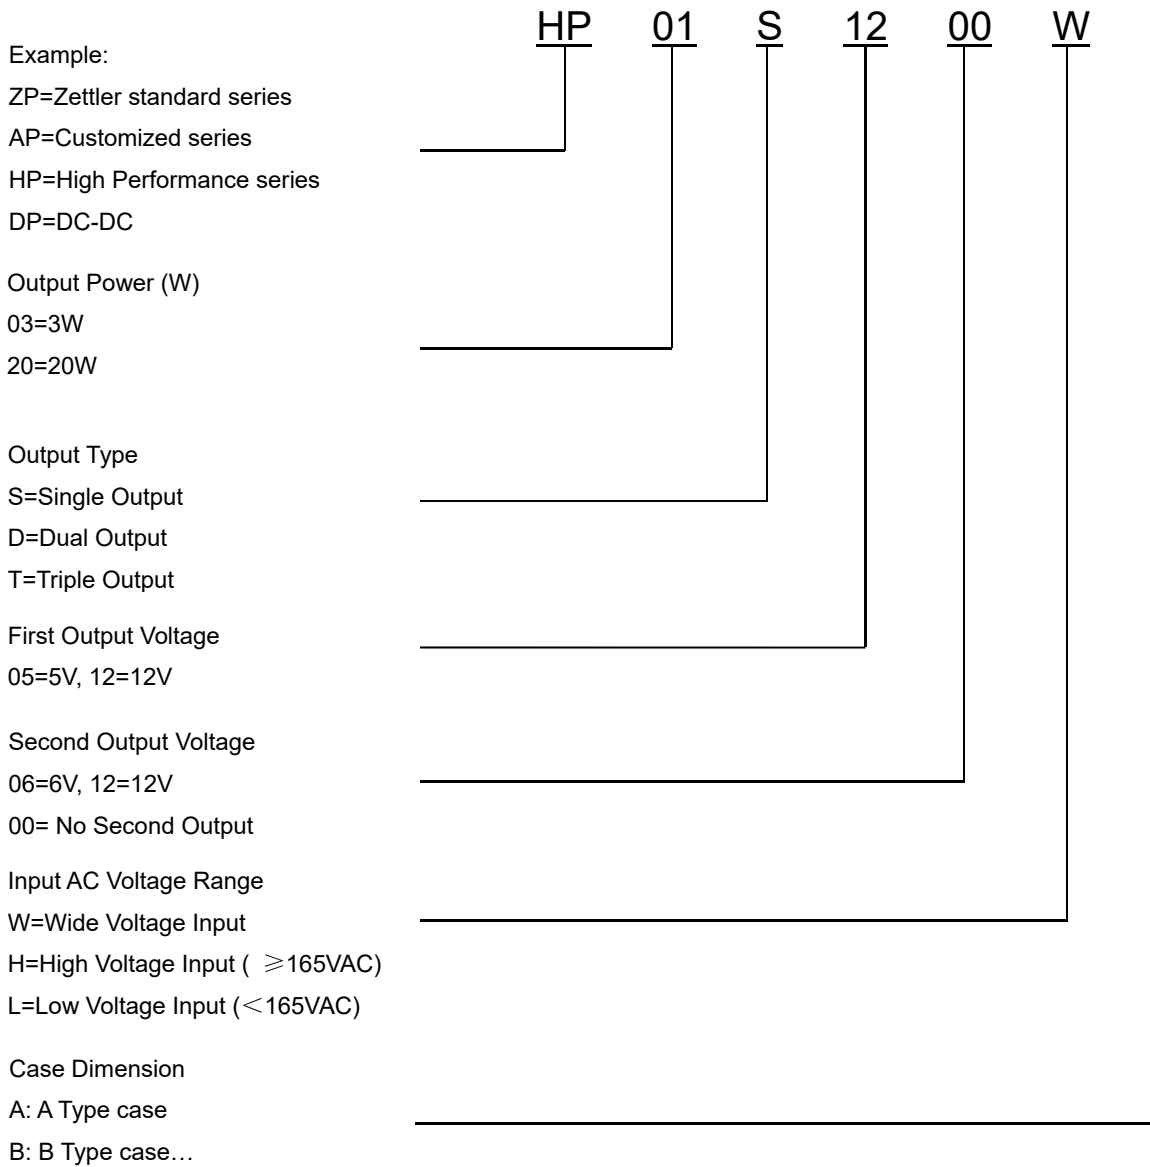

FEATURES (产品特点)

- PCB mounted switching Power module
- AC input voltage range: 85VAC~305VAC
- DC input voltage range: 100VDC~430VDC
- Ambient temperature range: -25°C~85°C
- Storage temperature range: -40°C~105°C
- Leakage current (Input :305VAC): <0.25mA
- Isolation voltage: Input –Output ≥3600VAC 60S
- Insulation Resistance: Input –Output 500VDC ≥100M Ohms
- MTBF:1000Khrs Min MIL-HDBK-217F (25°C)
- Compact size, easy installation
- High efficiency low standby power consumption <0.15W, Environment-friendly
- Built-in output over current protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55032 class B standard
- Class II Construction

APPLICATIONS (应用)

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.

NOTE: Contact Zettler for information on halogen free options



MODEL LIST (型号列表)

Model No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple&Noise (max)	Ambient TEMP(°C)	Weight	Certificate			
								UL	TUV	CE	CB
HP01S0300WI	1W	3.3Vdc	300mA	66%	150mVp-p	85	20g	●	●	●	●
HP01S0500WI	1W	5 Vdc	200mA	70%	150mVp-p	85	20g	●	●	●	●
HP01S0600WI	1W	6 Vdc	166mA	70%	150mVp-p	85	20g	●	●	●	●
HP01S0700WI	1W	7.5Vdc	133mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S0800WI	1W	8Vdc	125mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S0900WI	1W	9Vdc	111mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S1000WI	1W	10Vdc	100mA	72%	150mVp-p	85	20g	●	●	●	●
HP01S1200WI	1W	12Vdc	83mA	74%	150mVp-p	85	20g	●	●	●	●
HP01S1500WI	1W	15Vdc	66mA	75%	200mVp-p	85	20g	●	●	●	●
HP01S1800WI	1W	18Vdc	55mA	77%	200mVp-p	85	20g	●	●	●	●
HP01S2400WI	1W	24Vdc	42mA	77%	200mVp-p	85	20g	●	●	●	●


ELECTRICAL SPECIFICATION (电性能参数)

Model No. / 型号		HP01SXX00WI		
Input 输入参数	Rated Voltage / 额定电压	100-277VAC		
	Voltage Range / 输入电压范围	85-305VAC or 100-430VDC		
	Frequency (Hz) / 输入频率范围	47-63 Hz		
	Current (Full load) / 输入电流	115VAC	230VAC	277VAC
		25mA	18mA	15mA
	Inrush Current (<500us) / 冲击电流	6A	10A	
	No Load Loss / 待机功耗	0.15W Max@230VAC		
HOT PLUG / 热拔插	Unavailable			
Output 输出参数	Voltage (V) / 输出电压	Refer to "Model List"		
	Current (mA) max. / 输出额定电流	Refer to "Model List"		
	Voltage Accuracy / 输出电压精度	±3%		
	Line Regulation / 线性调节率	±0.5%		
	Load Regulation / 负载调节率	±0.5%		
	Minimum Load (mA) / 最小负载	0		
	Ripple & Noise / 输出纹波	Refer to "Model List"		
	Efficiency (typ.) / 工作效率	Refer to "Model List"		
	Set-up Time / 开机时间	≤50ms/230VAC, ≤30ms/115VAC		
	Hold up Time / 掉电保持时间(典型值)	>40ms/230VAC, 12ms/115VAC		
Protection 保护特性	Over Current Protection / 过流保护	≥120%Io Self-recovery		
	Short Circuit Protection / 短路保护	Hiccup ,continuous ,short capable, self-recovery		
Environment 环境	Operating Temperature / 工作温度	-25°C...+85°C @Free air convection		
	Operating Humidity / 工作湿度	10-90% RH		
	Storage Temperature / 存储温度	-40°C...+105°C		
	Storage Humidity / 存储湿度	5~95% RH (No Condensing) at full load		
	Temperature Coefficient/温度漂移系数	±0.03%/°C (0~85°C)		
Physical 外观结构	Case Material / 外壳材质	Plastic (UL 94V-0 rated)		
	Weight / 产品净重	20g (ref.)		
Safety & EMC 安全认证及 电磁兼容	Dielectric Strength / 绝缘强度	I/P-O/P : 3600VAC		
	Safety Standards / 安全标准	Compliance With UL/EN62368-1 ,EN61558-2-16		
	EMI / 电磁兼容	Compliance With EN55032 CLASS B, EN61000-3-2, EN61000-3-3		
	EMS (Noise Immunity)/ 电磁抗干扰	Compliance With EN55035	Need to add external EMC component (Refer to the Schematic)	
Reliability Requirement 可靠性要求	MTBF/平均故障间隔时间	1000Khrs Min MIL-HDBK-217F (25°C)		
	Burn-In Test/ 老化测试	The unit shall be burned in for 2~4 Hours under 277Vac input and with full load at 25°C		

PRODUCT CHARACTERISTIC CURVE (产品特性曲线)

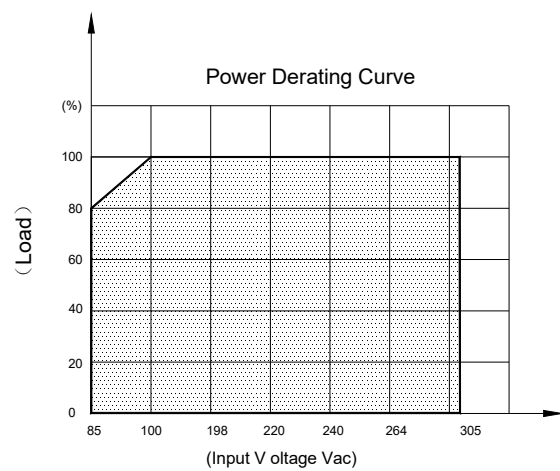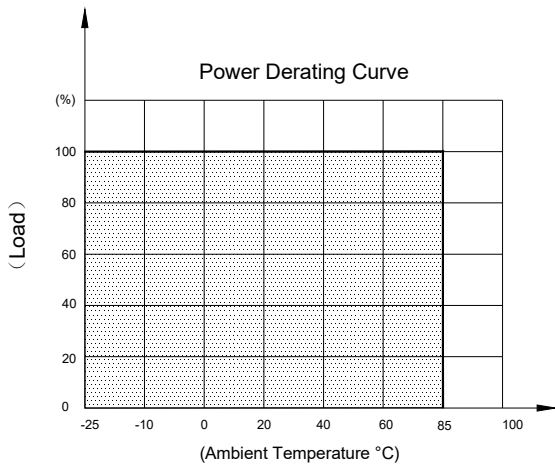


TYPICAL APPLICATION SCHEMATIC (典型应用电路)

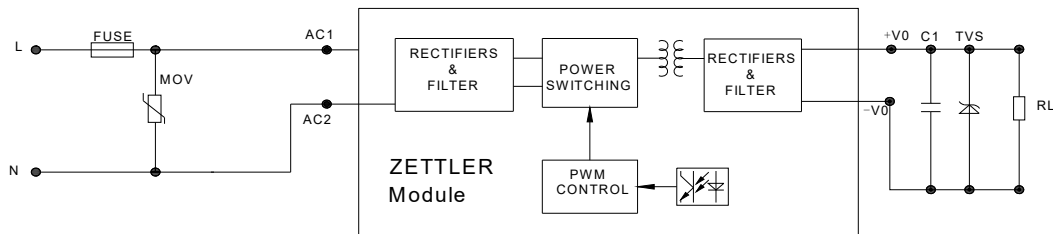

ITEM	MOV	FUSE
1~2W	14D561K	1A/300V
3-10W	14D561K	2A/300V
10~20W	14D561K	3.15A/300V

Note: External circuit components are only recommendations, customers should choose their own components and values according to their specific system application requirements.

MECHANICAL SPECIFICATION (尺寸图)

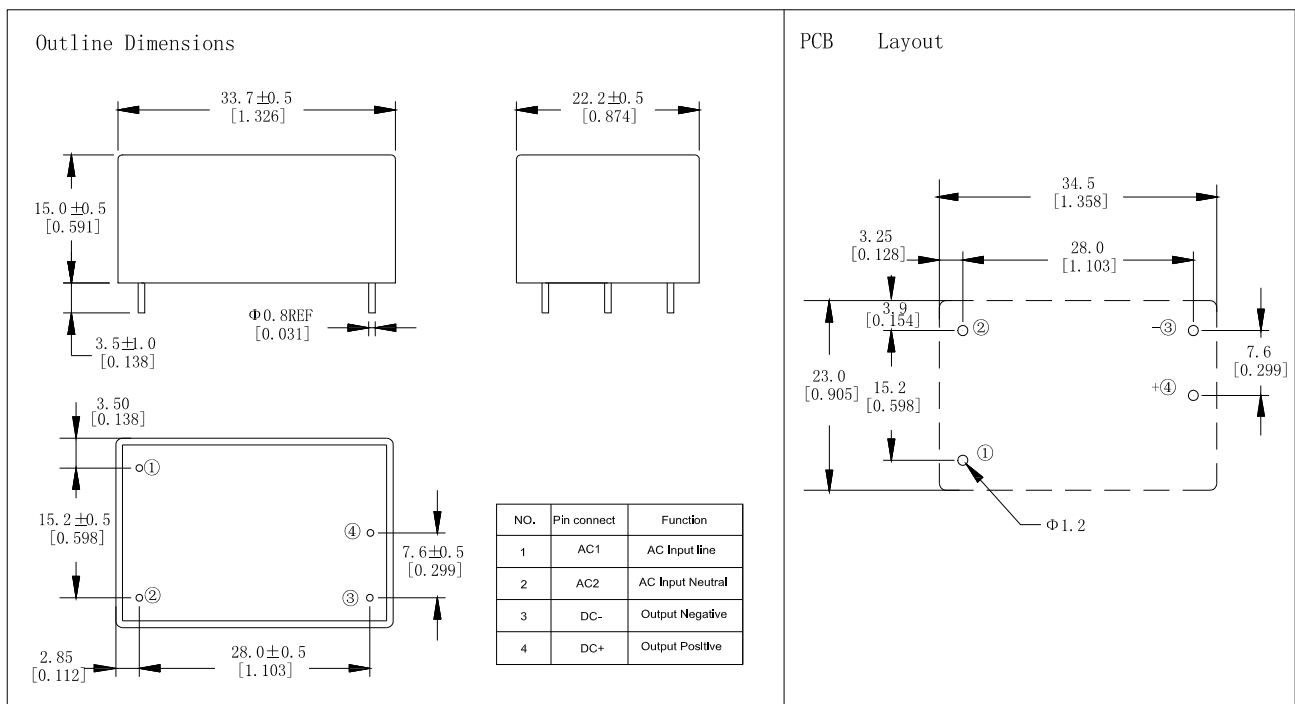

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zettler](#) manufacturer:

Other Similar products are found below :

[AZ1530-08-2](#) [AZ2100-1C-6DE](#) [AZ2110-1A-6D](#) [AZ2111-1C-18D](#) [AZ2428-035-40LUS](#) [AZ2510P2-1A-24D](#) [AZ2693-560-2](#) [AZ2800-2A-6DE](#) [AZ428-035-4H](#) [AZ429-V12-10L](#) [AZ431-V09-11](#) [AZ439-13-1H](#) [AZ5-5DSE](#) [AZ692-560-2](#) [AZ732-125-2](#) [AZ743-2C-5D](#) [AZ826-2C-24DSE](#) [AZ847P2-24](#) [AZ941-1C-5DE](#) [AZ973-1A-12DC2](#) [AZ973-1C-12DC2](#) [AZ973-1C-24DC1](#) [AZ976-1C-12DE](#) [AZ988-1CT-12DC1](#)
[AZ2150-1A-6D](#) [AZ2428-56-40LUS](#) [AZ2428-V80-201](#) [AZ2700-2A-12D](#) [AZ420-40-40L](#) [AZ420-40-40LUS](#) [AZ428-1011-4T](#) [AZ428-70-40H](#)
[AZ428-V10-4H](#) [AZ429-V05-10L](#) [AZ531-045-1](#) [AZ6-4CH-24D](#) [AZ725-1C-12DE](#) [AZ762-1C-115AF](#) [AZ762-1C-48DEF](#) [AZ830-4C-5DSEA](#)
[AZ420-70-40L](#) [AZ733-2C-24DA](#) [A2428-221-201](#) [AZ164-4C-9D](#) [AZ2110-1A-70D](#) [AZ2110-1A-9D](#) [AZ2110-1C-6D](#) [AZ2110-1C-70D](#)
[AZ2111-1A-18D](#) [AZ2280-1C-24D](#)