

# Miniature Snap Switch

## Single Pole D4 Series



### Features

- Choice of standard or light operating force
- Long life coil spring mechanism
- RoHS compliant
- Cadmium free
- Various aux actuators
- Various terminal types
- Agency approved extended life versions available

### Standard Parts<sup>1</sup> (note "G2" suffix does not affect fit, form or function)

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| D413-R1AA | D429-R1TD | D433-R1AA | D443-R1LD | D449-R1LL | D453-R1RA |
| D413-R1LA | D429-R1AA | D433-R1LD | D443-R1MD | D449-R1MD | D453-R1RD |
| D413-R1LD | D429-R1LD | D433-R1RA | D443-R1RA | D449-R1ML | D459-R1AA |
| D413-R1RA | D429-R1LL | D433-R1RD | D443-R1RD | D449-R1RA | D459-R1LD |
| D419-R1AA | D429-R1MD | D439-R1LL | D449-R1AA | D449-R1RD | D459-R1LL |
| D423-R1RA | D429-R1ML | D439-V1ML | D449-R1LD | D453-B8AA | D459-R1ML |
| D423-R1RD |           | D443-R1AA |           | D453-R1AA |           |

<sup>1</sup>The part number configuration matrix below provides details to the part numbers above.  
For configurable part numbers that are not listed above, not listed in your region, or for custom part numbers, contact the factory or your distributor.  
For information on crossing discontinued U.S. only part numbers, see D4 cross-reference chart at [www.switches-sensors.zf.com](http://www.switches-sensors.zf.com).

### Part Number Breakdown

D413-R1AA

| Series | Contact Rating <sup>2</sup> |       | Configuration <sup>3</sup> |           |                        |        |           |        |           |                 |
|--------|-----------------------------|-------|----------------------------|-----------|------------------------|--------|-----------|--------|-----------|-----------------|
| D4     | 1                           | 0.1 A | 85 °C                      |           |                        | 125 °C |           | 150 °C |           |                 |
|        | 2                           | 3 A   | 1                          | SPST – NO | Standard Op. Force "Y" | G      | SPST – NO | S      | SPST – NO | Light Op. Force |
|        | 3                           | 5 A   | 2                          | SPST – NC |                        | H      | SPST – NC | T      | SPST – NC |                 |
|        | 4                           | 10 A  | 3                          | SPDT      |                        | M      | SPDT      | U      | SPDT      |                 |
|        | 5                           | 15 A  | 7                          | SPST – NO | Light Op. Force "X"    | N      | SPST – NO |        |           |                 |
|        | 8                           | 21 A  | 8                          | SPST – NC |                        | P      | SPST – NC |        |           |                 |
|        |                             |       | 9                          | SPDT      |                        | R      | SPDT      |        |           |                 |

<sup>2</sup>UL AC current rating; see table on reverse for complete details

<sup>3</sup>D48 only available with light operating force

|    |  |
|----|--|
| A1 | Welding                                      |
| B8 | Short solder                                 |
| P4 | 1.2 x 0.5 (0.047 x 0.020) PCB, underside*    |
| P5 | 1.2 x 0.5 (0.047 x 0.020) PCB, rear*         |
| PA | 1.2 x 0.5 (0.047 x 0.020) PCB, housing side* |
| PB | 1.2 x 0.5 (0.047 x 0.020) PCB, cover side*   |
| Q1 | 4.8 x 0.8 (0.187 x 0.032) QC, straight*      |
| Q3 | 4.8 x 0.8 (0.187 x 0.032) QC, dog leg*       |

\*not available for D48

\*\*not available for D45 or D48

| Terminal Type mm (inches) |   |
|---------------------------|---|
| R1                        | 4.8 x 0.5 (0.187 x 0.020) QC, straight*   |
| R3                        | 4.8 x 0.5 (0.187 x 0.020) QC, dog leg**   |
| S1                        | Solder with temp stop                     |
| V1                        | 6.3 x 0.8 (0.250 x 0.032) QC, straight    |
| V3                        | 6.3 x 0.8 (0.250 x 0.032) QC, dog leg     |
| W9                        | Screw*                                    |
| X5                        | 1.5 x 0.8 (0.059 x 0.032) QC, 2.5 mm grid |
| Y5                        | 6.3 x 0.8 (0.250 x 0.032) QC, 5 mm grid   |

Actuator Type mm (inches)

| Actuation length |                          |              |
|------------------|--------------------------|--------------|
| AA               | Button                   | N/A          |
| JA               | SS lever, standard ratio | 21.2 (0.835) |
| JD               | SS lever, standard ratio | 35.6 (1.4)   |
| JL               | SS lever, standard ratio | 69.9 (2.75)  |
| KA               | SS lever, high ratio     | 25.7 (1.01)  |
| KD               | SS lever, high ratio     | 40.1 (1.58)  |
| KL               | SS lever, high ratio     | 74.4 (2.93)  |
| LA               | Lever, standard ratio    | 21.2 (0.835) |
| LD               | Lever, standard ratio    | 35.6 (1.4)   |
| LL               | Lever, standard ratio    | 69.9 (2.75)  |

| Actuation length |                                |              |
|------------------|--------------------------------|--------------|
| MA               | Lever, high ratio              | 25.7 (1.01)  |
| MD               | Lever, high ratio              | 40.1 (1.58)  |
| ML               | Lever, high ratio              | 74.4 (2.93)  |
| RA               | Roller, standard ratio         | 20.6 (0.811) |
| RD               | Roller, standard ratio         | 34.1 (1.34)  |
| SA               | Roller, simulated, rear mount  | 20.6 (0.811) |
| TA               | Roller, high ratio             | 25.1 (0.988) |
| TD               | Roller, high ratio             | 38.6 (1.52)  |
| UA               | Roller, simulated, front mount | 25.1 (0.988) |

For actuator details, see D4 actuator reference sheet at <http://switches-sensors.zf.com/us/>

[www.switches-sensors.zf.com](http://www.switches-sensors.zf.com) ZF Electronics Systems Pleasant Prairie, LLC ("ZF") acquired the rights to the CHERRY branded switches and sensors in 2008. Although ZF divested its interest in the CHERRY name in 2015, the switches and sensors remain unchanged and are now sold under the ZF brand.

Page 1 of 2, Last update 2018-03-16, Specifications subject to change without notice.



## Electrical Specifications – Contact Ratings

| Contact | EN61058 <sup>4</sup>                                  | UL1054  |
|---------|---|---|
| 1       | 0.1 (0.5) A, 250 VAC; 0.5 A, 30 VDC; 1 (1) A, 250 VAC | 0.1 A, 125/250 VAC; 0.5 A, 30 VDC; 1 A, 125 VAC   |
| 2       | 3 (1) A, 250 VAC                                      | 3 A, 125/250 VAC; 1/10 HP, 250 VAC                |
| 3       | 6 (2) A, 250 VAC                                      | 5 A, 125/250 VAC; ¼ HP, 250 VAC                   |
| 4       | 10 (3) A, 250 VAC                                     | 10 A, 125/250 VAC; 6 A, 30 VDC; ½ HP, 125/250 VAC |
| 5       | 16 (4) A, 250 VAC                                     | 15 A, 125/250 VAC; ½ HP, 125-250 VAC              |
| 8       | 21 (8) A, 250 VAC                                     | 21 A, 250 VAC; 1 HP, 125 VAC; 2 HP, 250 VAC       |

UL file number E314201

<sup>4</sup>D45 with R1 terminals are not 61508 certified

## Environmental and Mechanical Specifications

|   |  |                     |
|---|--|---------------------|
| Operating Temperature                                 | -40 °C to 85, 125 or 150 °C (-40 °F to 185, 257 or 302 °F) |                     |
| Flammability Rating                                   | UL 94V-0   |                     |
| Operating life – electrical life at rated load, 85 °C |  |                     |
|   | Contact  | UL1054 <sup>5</sup> |
|   | 1  | 6,000               |
|   | 2  | 6,000               |
|   | 3  | 6,000               |
|   | 4  | 6,000               |
|   | 5  | 6,000               |
|   | 7  | 6,000               |
|   | EN61058  |                     |
|   | 1  | 50,000              |
|   | 2  | 50,000              |
|   | 3  | 50,000              |
|   | 4  | 50,000              |
|   | 5  | 50,000              |
|   | 7  | 10,000              |

<sup>5</sup>Extended life available


## Material Specifications

|                    |   |
|--------------------|---|
| Case               | Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C             |
| Cover              | Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C             |
| Actuating Button   | Thermoplastic Acetyl (POM) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C |
| Contacts           | Gold Cross Point (D41), Silver (D42), Silver Alloy (D43-D48)                  |
| Terminals          | Brass   |
| Auxiliary Actuator | Stainless Steel or Cold-Rolled Steel (Nickel Plated)                          |
| Moving Blade       | Silver Plated Brass   |

## Environmental Specifications

|                     |  |
|---------------------|--|
| Ambient Temperature | -40 °C to 85 °C/120 °C (-40 °F to 185 °F/248 °F) |
| Operating Force     | 45 – 400 cN (model dependent, without actuator)  |
| Total Travel        | 1.6 mm   |
| Ingress Protection  | IP40   |

## Dimensions mm (inches) and terminal configurations

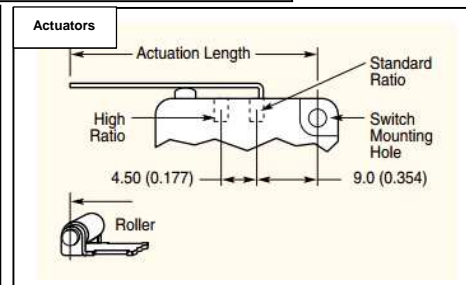

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [ZF Cherry](#) manufacturer:*

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)  
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)  
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)  
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)  
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)