
# Subminiature Snap Action Switch DG Series



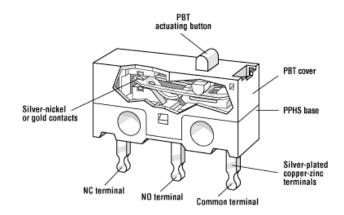

#### **Features**

- Small size, just 0.504" x 0.228" x 0.256" (12.8mm x 5.8mm x 6.5mm)
- Contact rating of 0.05A up to 3A
- Can be mounted to circuit boards in upright position or horizontally with terminals bent left or right
- Mechanical life: min 1 x 10<sup>6</sup> operations (depending on model)
- RoHS compliant

| Electric | cal Ratings and Operating Life |                  |                       |                       |  |
|----------|--------------------------------|------------------|-----------------------|-----------------------|--|
| Switch   | According                      | g to UL1054      |                       |                       |  |
| Series   | Nominal Load                   | Operation cycles | Mechanical Life (min) | Electrical Life (min) |  |
| D04      | 3A, 125VAC                     | 6000             | 1,000,000 cycles      | 10,000 cycles AC load |  |
| DG1      | 2A, 30VDC                      | 0000             | 1,000,000 cycles      | 30,000 cycles DC load |  |
| DG2      | 0.05 A, 30VDC                  | 6000             | 1,000,000 cycles      | 200,000 cycles        |  |
| D04      | 1A, 125VAC                     | 6000             | 1,000,000 cycles      | 10,000 cycles AC load |  |
| DG4      | 1A, 30VDC                      | 3300             | 1,000,000 0y0103      | 10,000 cycles DC load |  |

| Technical Specifications |               | Material Speci    | Material Specifications        |                            |  |  |
|--------------------------|---------------|-------------------|--------------------------------|----------------------------|--|--|
| Temperature Rating:      | -25°C to 85°C | Base:             | Base:                          |                            |  |  |
| remperature Rating.      | -23 6 10 63 6 | Cover:            |                                | PBTP UL 94V-0              |  |  |
| Degree of Protection:    | IP40          | Actuator button:  | Actuator button: PBTP UL 94V-0 |                            |  |  |
| Contact Gap              | < 3mm (µ)     | Contacts:         | DG1 / DG4<br>DG2               | Silver Alloy<br>Gold Flash |  |  |
| Contact Configuration:   | SPDT          | Terminals:        |                                | Brass (silver plated)      |  |  |
| UL File Number: E23301   |               | Auxiliary actuato | Auxiliary actuator:            |                            |  |  |

Specifications subject to change







## Subminiature Snap Action Switch


# **DG Series**

#### Dimensions inches (mm)

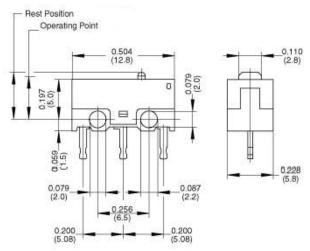

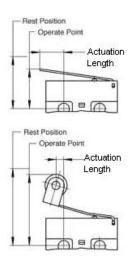


#### **Terminal Options inches (mm)**

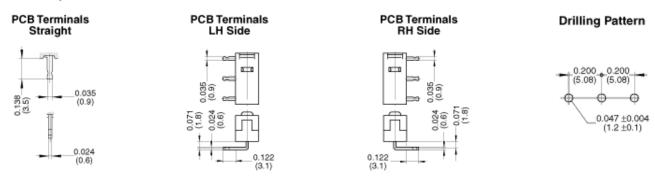


#### **Commonly Stocked Distributor Items / Preferred Part Numbers**

|             |               | Maximum       | Maximum Pre-      |                       | Minimum      | Max. Movement       | Max. Rest         | Actuation    |
|-------------|---------------|---------------|-------------------|-----------------------|--------------|---------------------|-------------------|--------------|
|             |               | Operate Force | Travel inches     | Operate Point         | Overtravel   | Differential        | Position inches   | Length       |
| Part Number | Lever Type    | (gms)         | (mm)              | inches (mm)           | inches (mm)  | inches (mm)         | (mm)              | inches (mm)  |
|             |               |               |                   | 0.213 +/- 0.008       |              |                     |                   |              |
| DG13B1AA    | N/A           | 140           | 0.020 (0.5)       | (5.4 +/- 0.20)        | 0.008 (0.2)  | 0.004 (0.1)         | 0.232 (5.9)       | N/A          |
|             |               |               |                   | 0.268 + 0.031/- 0.016 |              |                     |                   |              |
| DG13B1LA    | Flat straight | 45            | 0.071 (1.80)      | 6.8 + 0.8 /0.4        | 0.022 (0.55) | 0.020 (0.5)         | 0.370 (9.4)       | 0.171 (43.5) |
|             |               |               |                   | 0.488 +/- 0.020       |              |                     |                   |              |
| DG13B1RA    | Roller        | 60            | 0.059 (1.5)       | (12.4 +/- 0.5)        | 0.022 (0.55) | 0.020 (0.5)         | 0.547 (13.9)      | 0.055 (1.4)  |
|             |               |               |                   | 0.268 + 0.031/- 0.016 |              |                     |                   |              |
| DG13B2LA    | Flat straight | 45            | 0.071 (1.80)      | 6.8 + 0.8 /0.4        | 0.022 (0.55) | 0.020 (0.5)         | 0.370 (9.4)       | 0.171 (43.5) |
|             |               |               |                   | 0.268 + 0.031/- 0.016 |              |                     |                   |              |
| DG23B1LA    | Flat straight | 45            | 0.071 (1.80)      | 6.8 + 0.8 /0.4        | 0.022 (0.55) | 0.020 (0.5)         | 0.370 (9.4)       | 0.171 (43.5) |
|             |               |               |                   | 0.488 +/- 0.020       |              |                     |                   |              |
| DG23B1RA    | Roller        | 60            | 0.059 (1.5)       | (12.4 +/- 0.5)        | 0.022 (0.55) | 0.020 (0.5)         | 0.547 (13.9)      | 0.055 (1.4)  |
|             |               |               |                   | 0.268 + 0.031/- 0.016 |              |                     |                   |              |
| DG23B2LA    | Flat straight | 45            | 0.071 (1.80)      | 6.8 + 0.8 /0.4        | 0.022 (0.55) | 0.020 (0.5)         | 0.370 (9.4)       | 0.171 (43.5) |
|             |               |               |                   | 0.488 +/- 0.020       |              |                     |                   |              |
| DG23B2RA    | Roller        | 60            | 0.059 (1.5)       | (12.4 +/- 0.5)        | 0.022 (0.55) | 0.020 (0.5)         | 0.547 (13.9)      | 0.055 (1.4)  |
|             |               | 500-          | 0.500000 00.50000 | 0.268 + 0.031/- 0.016 |              | N 100000 BO 1000    | 507 000000 000 00 |              |
| DG23B3LA    | Flat straight | 45            | 0.071 (1.80)      | 6.8 + 0.8 /0.4        | 0.022 (0.55) | 0.020 (0.5)         | 0.370 (9.4)       | 0.171 (43.5) |
|             |               |               |                   | 0.488 +/- 0.020       |              | Contraction for the |                   |              |
| DG23B3RA    | Roller        | 60            | 0.059 (1.5)       | (12.4 +/- 0.5)        | 0.022 (0.55) | 0.020 (0.5)         | 0.547 (13.9)      | 0.055 (1.4)  |

#### **Ordering Information**

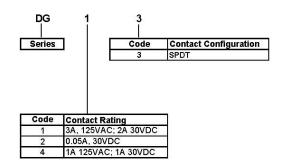



| AA<br> |                               |
|--------|-------------------------------|
| Code   | Actuator Type                 |
| AA     | Button only                   |
| LA     | Straight 0.171" (4.35mm) long |
| LB     | Straight 0.500" (12.7mm) long |
| LC     | Straight 1.012" (25.7mm) long |
| RA     | Roller 0.055" (1.4mm) long    |

#### Contact

Call, fax or visit our Website for more information.

**ZF Electronics Corporation** 11200 88th Avenue Pleasant Prairie, WI 53158

Phone: 262.942.6500 Web: www.cherrycorp.com Email: cep\_sales@zf.com Fax: 262.942.6566 The manufacturer accepts no liability for errors or non-availability, and reserves the right to change specifications without prior notice.

Technical data relates to product specifications only. Features may differ from those described. Only drawings combined with product specifications shall be deemed binding.

© 2007 ZF Electronics Corporation

Last Updated: 02/24/11



### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by ZF Cherry manufacturer:

Other Similar products are found below:

83228001 01.098.1358.1 602EN532 602EN535-RB 602HE5-RB1 604HE162 604HE223-6B 624HE17-RB 6HM89 6PA78-JM 6SE1
6SX1-H58 70500216 70500840 70599106 MBD5B1 MBH2731 73-316-0012 79211759 79211923 79218589 7AS12 ML-1155 ML-1376
831010C3.0 831090C2.EL 83131904 84212012 8AS239 8HM73-3 903VB1-PG 914CE1-6G PL-100 11SM1077-H4 11SM1077-H58
11SM1-TN107 11SM405 11SM8423-H2 11SX37-T 11SX48-H58 11SX55-H58 11SM2442-T 11SM76-T 11SM77-H58 11SM77-T
11SM863-T 11SM866 11SX47-H58 A7CN-1M-1-LEFT A831700C7.0