


## CHERRY TC 1200

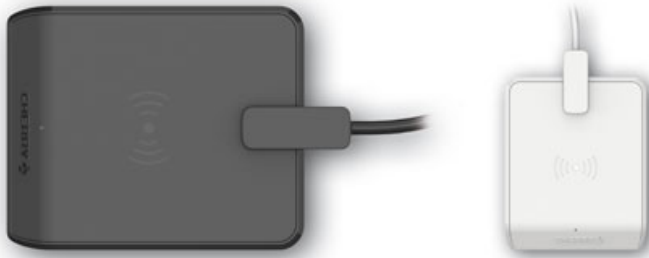

Models may vary from the image shown

### Durable, reliable and practical - Class 1 terminal for contactless smart cards

CHERRY TC 1200 - the reliable solution for bidirectional communication with contactless chip cards. Design: intelligent. Operation: with one hand. Workmanship: high-quality.

### Key benefits

- Class 1 smart card terminal
- Bidirectional communication for contactless smart cards
- LED status display
- High-quality workmanship, state-of-the-art technology and intelligent design
- One-handed operation and rubber surfaces to prevent slipping
- Attachable card clip to fasten contactless smart cards
- Connection via USB 2.0 port
- 1.75 m cable length for maximum freedom of movement
- Software supports Microsoft Windows, Linux and Mac OS X operating systems
- Supported standards: PC/SC, CCID, CT-API

### Technical Data:

#### Housing colour:

Product dependant, see table "Models"

#### Weight (product):

approx. 75 g

#### Total weight (with packaging):

Product dependant, see table "Models"

#### Cable Length:

approx. 1.75 m

#### Storage Temperature:

-20°C to 65°C

#### Operating Temperature:

0°C to 50°C



#### Current Consumption:

max. 230 mA

#### Interface:

- USB

#### Product approvals:

- VDE GS 
- c-tick 
- UL 
- CE 
- FCC 

#### System requirements:

- USB connection

#### Dimensions (product):

76 x 62 x 11 mm

#### Packaging dimensions:

Product dependant, see table "Models"

#### Packaging (version):

Product dependant, see table "Models"

#### Smart card reader:

- Type: Contact-free
- Hardware interface: USB
- Chip-card protocols: T=CL
- Contact: contact-free reader in accordance with ISO14443A, ISO14443B, ISO15693
- Software interface: CT-API, PC/SC
- Compatible chip card types: MIFARE®, DESFire®, iCLASS®, ...
- Transmission speed reader <=> card: max. 848 kBit/s | 26 kbit/s (ISO15693)
- Transmission speed reader <=> system: max. 12 MBit/s

#### Packaging Unit:

- Number of products in the master package: Product dependant, see table "Models"
- Number of master packages per pallet: Product dependant, see table "Models"

#### Warranty:

2 years

Errors, technical changes and delivery possibilities excepted. Technical information refers only to the specifications of the products. Features may differ from the information provided.

## Models:

	Product name	Order number	Housing colour	Total weight (with packaging)	Packaging dimensions	Packaging (version)
1	CHERRY TC 1200	JT-0200AB-0	pale grey	-	-	Collective p
2	CHERRY TC 1200	JT-0200AB-2	black	-	-	Collective p
3	CHERRY TC 1200	JT-0200WB-0	pale grey	approx. 96 g	110 x 40 x 70 mm	White box
4	CHERRY TC 1200	JT-0200WB-2	black	approx. 96 g	110 x 40 x 70 mm	White box

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Input Devices](#) category:*

*Click to view products by [ZF Cherry](#) manufacturer:*

Other Similar products are found below :

[80260-00](#) [81485-28](#) [81521-08](#) [FKB4720-103](#) [84250-26](#) [84980-04](#) [84S-AC1-000](#) [JD-0700EU-2](#) [JM-0800-2](#) [JW-T0100](#) [89498-13](#) [89758-05](#)  
[89886-26](#) [89941-00](#) [G80-3000LSCEU-2](#) [MJ0FGGRY](#) [JM-0800-0](#) [84S-BB1-004](#) [81601-26](#) [UL21KMZQ](#) [G8011900LPMUS0](#) [G84-](#)  
[4700LUCUS-0](#) [81485-26](#) [84105-13](#) [V400-W24 5M](#) [V400-W23 5M](#) [G84-5200LCMEU-2](#) [DT2257X20V00GRY](#) [84Z2029-78](#) [84Z2029-79](#)  
[V400-W23P 5M](#) [VW3A8151R20U](#) [V400-W24 15M](#) [LT1332D](#) [V400-W24 10M](#) [V400-W24P 15M](#) [V400-WM0 1M](#) [V400-W24P 10M](#) [V400-](#)  
[W23P 10M](#) [TCS-1492OP](#) [V400-W23 3M](#) [LT1372D](#) [LP1007EXXH00R](#) [DT2253X20V00BLK](#) [100133BX](#) [EZ08-230013](#) [81248-04](#) [89887-26](#)  
[90215-00](#) [HB110C3NWBNA](#)